DTIC FILE COPY

USAAEFA PROJECT NO. 81-01-6

US ARMY
AVIATION
SYSTEMS COMMAND

FUEL CONSERVATION EVALUATION OF US ARMY HELICOPTERS PART 6, PERFORMANCE CALCULATOR EVALUATION

AD-A181 645

FLOYD DOMINICK
PROJECT OFFICER/ENGINEER

ROY A. LOCKWOOD
MAJ, AV
PROJECT PILOT

JULY 1986

FINAL REPORT





DTIC
ELECTE
JUN 1 8 1987
S
D
E

APPROVED FOR PUBLIC RELEASE, DISTRIBUTION UNLIMITED.

US ARMY AVIATION ENGINEERING FLIGHT ACTIVITY
EDWARDS AIR FORCE BASE, CALIFORNIA 93523 - 5000

DISCLAIMER NOTICE

The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

DISPOSITION INSTRUCTIONS

Destroy this report when it is no longer needed. Do not return it to the originator.

TRADE NAMES

The use of trade names in this report does not constitute an official endorsement or approval of the use of the commercial hardware and software.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER: USAAEFA PROJECT NO. 81-01-6	2. GOVT ACCESSION NO.: AD-A181645
	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle): FUEL CONSERVATION OF US ARMY HELICOPTERS PART 6, PERFORMANCE CALCULATOR EVALUATION	5. TYPE OF REPORT & PERIOD COVERED: FINAL JANUARY 1981
	6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s): FLOYD DOMINICK, ROY A. LOCKWOOD	8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS: US ARMY AVN ENGINEERING FLIGHT ACTIVITY EDWARDS AIR FORCE BASE, CA 93523-5000	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS: US ARMY AVIATION SYSTEMS COMMAND 4300 GOODFELLOW BOULEVARD ST. LOUIS, MO 63120-1798	12. REPORT DATE: JULY 1986
	13. NUMBER OF PAGES: 208
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report): UNCLASSIFIED
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited.

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

DTIC ELECTE JUN 18 1987 S D E

18. SUPPLEMENTARY NOTES

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Compressibiltiy Effects
Flight Management Calculator
Flight Planning
Fuel Saving
Level Flight and Hover Data
Regressive Analog Model
UH-1H

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The US Army Aviation Engineering Flight Activity conducted an evaluation of Flight Management Calculator for the UH-1H. The calculator was a Hewlett-Packard HP-41CV. The performance calculator was evaluated for flight planning and in-flight use during 14 mission flights simulating operational conditions. The calculator was much easier to use in-flight than the operator's manual data. The calculator program needs improvement in the areas of pre-flight planning and execution speed. The mission flights demonstrated a 19 percent

fuel saving using "optimum" over "normal" flight profiles in warm temperatures (15 degrees C above standard). Savings would be greater at colder temperatures because of increasing compressibility effects. Acceptable accuracy for individual aircraft under operational conditions may require a regressive analog model in which individual aircraft data are used to update the program. The performance data base for the UH-1H was expanded with level flight and hover data to thrust coefficients and Mach numbers to the practical limits of aircraft operation.

(Keywords)

DTIC
COPY
INSPECTED
3

Accession For
NTIS GRA&I
DTIC TAB
Unannounced
Justification
By
Distribution/
Availability Codes
Dist | Avail and/or Special

TABLE OF CONTENTS

	Page
INTRODUCTION	
Background	1
Test Objectives	1
Description	1
Aircraft	1
Flight Management Calculator	2
Test Scope	2
Test Methodology	5
RESULTS AND DISCUSSION	
General	6
Calculator Evaluation	6
Pilot Comments	8
Documentation	9
Physical Characteristics	10
Accuracy	10
Units - Conversions	12
Data Ranges	12
Data Limits	12
Input	13
Output	14
Specific Performance Comments	15
Weight and Balance	15
Ground Operations	16
Engine Performance	17
Hover	17
Takeoff	17
Climb - Descent	18
Winds and Temperature	18
Emergency Performance	18
Future Development	19
Mission Flights	20
General	20
Flight Conditions	21
Loading and Fuel Quantity	23
Cruise Conditions	24
Cruise Altitude and Temperature	24
Cruise Rotor Speed	24
Cruise Airspeed	25
Winds and Distance	26
Indicator Accuracy	26

Mission Flight Performance..... 28
FMC Comparison..... 28
Climb and Descent Gains..... 31
Optimum Flight Profiles..... 32
Performance Tests..... 34
Level Flight Performance..... 34
Hover Performance..... 35
Engine Characteristics..... 35
Power Available..... 35
Fuel Flow..... 36

CONCLUSIONS

General..... 37
Specific..... 37

RECOMMENDATIONS..... 40

APPENDIXES

A. References..... 42
B. Flight Management Calculator and Aircraft Description.. 45
C. Test Instrumentation..... 62
D. Test Techniques and Data Analysis Methods..... 95
E. Prototype Optimum Cruise Charts and Supplemental Notes..... 111
F. Graphical Test Data..... 117

DISTRIBUTION

INTRODUCTION

BACKGROUND

1. The US Army is placing emphasis on achieving fuel conservation in operation of Army aircraft. The Department of the Army, Deputy Chief of Staff for Logistics (DCSLOG), Aviation Logistics Office/Special Assistant supports a program to minimize fuel consumption. The Directorate for Engineering, US Army Aviation Systems Command (AVSCOM) and US Army Aviation Engineering Flight Activity (USAAEFA), jointly developed a fuel conservation program which both US Army Materiel Command and DCSLOG agreed to implement. USAAEFA began a five part flight test program in January 1981. Results are reported in references 1 through 5, appendix A. Concurrently, AVSCOM contracted Bell Helicopter Textron (BHT) to develop a software program for the Hewlett-Packard HP-41CV calculator which could be used by Army pilots to provide performance data and fuel consumption data during operational missions. This calculator program and results of a limited field evaluation are reported in reference 6. AVSCOM requested that USAAEFA conduct an engineering flight evaluation of the performance calculator and provide additional performance data for the UH-1H to complete the performance characterization for the fuel conservation effort (ref 7). A test plan (ref 8) was prepared in response to that request.

TEST OBJECTIVES

2. The objectives of this test were to evaluate the overall adequacy of the performance calculator, determine optimum cruise fuel savings under operational conditions and to obtain additional blade compressibility and blade stall flight test data on the UH-1H to complete the performance characterization for the fuel conservation effort.

DESCRIPTION

Aircraft

3. The UH-1H is a thirteen-place, single engine helicopter with a 9500 pound (lb) maximum gross weight. Lift is provided by a two-bladed, 48-foot diameter, teetering main rotor. A two-bladed pusher type tail rotor provides antitorque and directional control. Power is normally supplied by a T53-L-13B free turbine engine rated at 1400 horsepower. For part of these tests a T53-L-703 engine with a thermodynamic rating of 1800 horsepower was used. This engine has been designated as a contingency engine for the UH-1H. Drive train limits derate either engine

to 1100 horsepower, which is available up to 7000 feet and 15,000 feet at standard temperatures from the -13B and -703 engines respectively. The test aircraft (photo 1), US Army serial number 69-15532, is a standard production UH-1H. A more complete description is presented in appendix B. Additional information can be found in the operator's manuals (refs 9, 10 and 11, app A) and the detail specification (ref 12). The aircraft was in normal clean configuration except for the test instrumentation described in appendix C.

Flight Management Calculator

4. The Flight Management Calculator (FMC) consists of a Hewlett-Packard HP-41CV programmable scientific pocket calculator, BHT modification hardware and Performance Data Quick (PDQ) software. The FMC as configured by BHT for the calculator evaluation is shown in photograph 2. The modifications to the HP-41CV expanded the capability of the basic calculator, provided the pilot with input function labels and allowed attachment to the pilot's knee board. The PDQ program provides weight and balance information as well as performance information for various flight conditions. The program is considered proprietary by BHT and was programmed in "private" mode which makes it inaccessible. References 6 and 13, appendix A and appendix B provide thorough documentation and description of the FMC.

TEST SCOPE

5. Fourteen mission flights were conducted to determine optimum cruise fuel savings and evaluate the FMC. All tests were within the operator's manual limitations as amended by the airworthiness release (ref 14, app A), which allowed a maximum takeoff weight of 10,000 lb (500 lb over the normal limit) and rotor speeds down to 304 rpm below 8000 lb gross weight and 294 rpm below 7500 lb gross weight. These flights covered a spectrum of UH-1H range capabilities, air traffic control constraints, weather conditions, and other operational variables. Mission test flights were conducted with a mid center of gravity (cg) and a nominal engine start weight of 8100 pounds, which represented full fuel, a crew of two, and 1000 lb cargo or passengers. Comparative mission flights using "normal" and "optimum" flight profiles gave an approximation of fuel savings using optimum conditions. Cruise altitudes were nominally 1500 feet above ground level (AGL) for the normal flight profiles. Cruise altitude, rotor speed, and airspeed for the optimum flight profiles were determined from previous test data (ref 2, app A) included in appendix E.



Photo 1. Test Aircraft

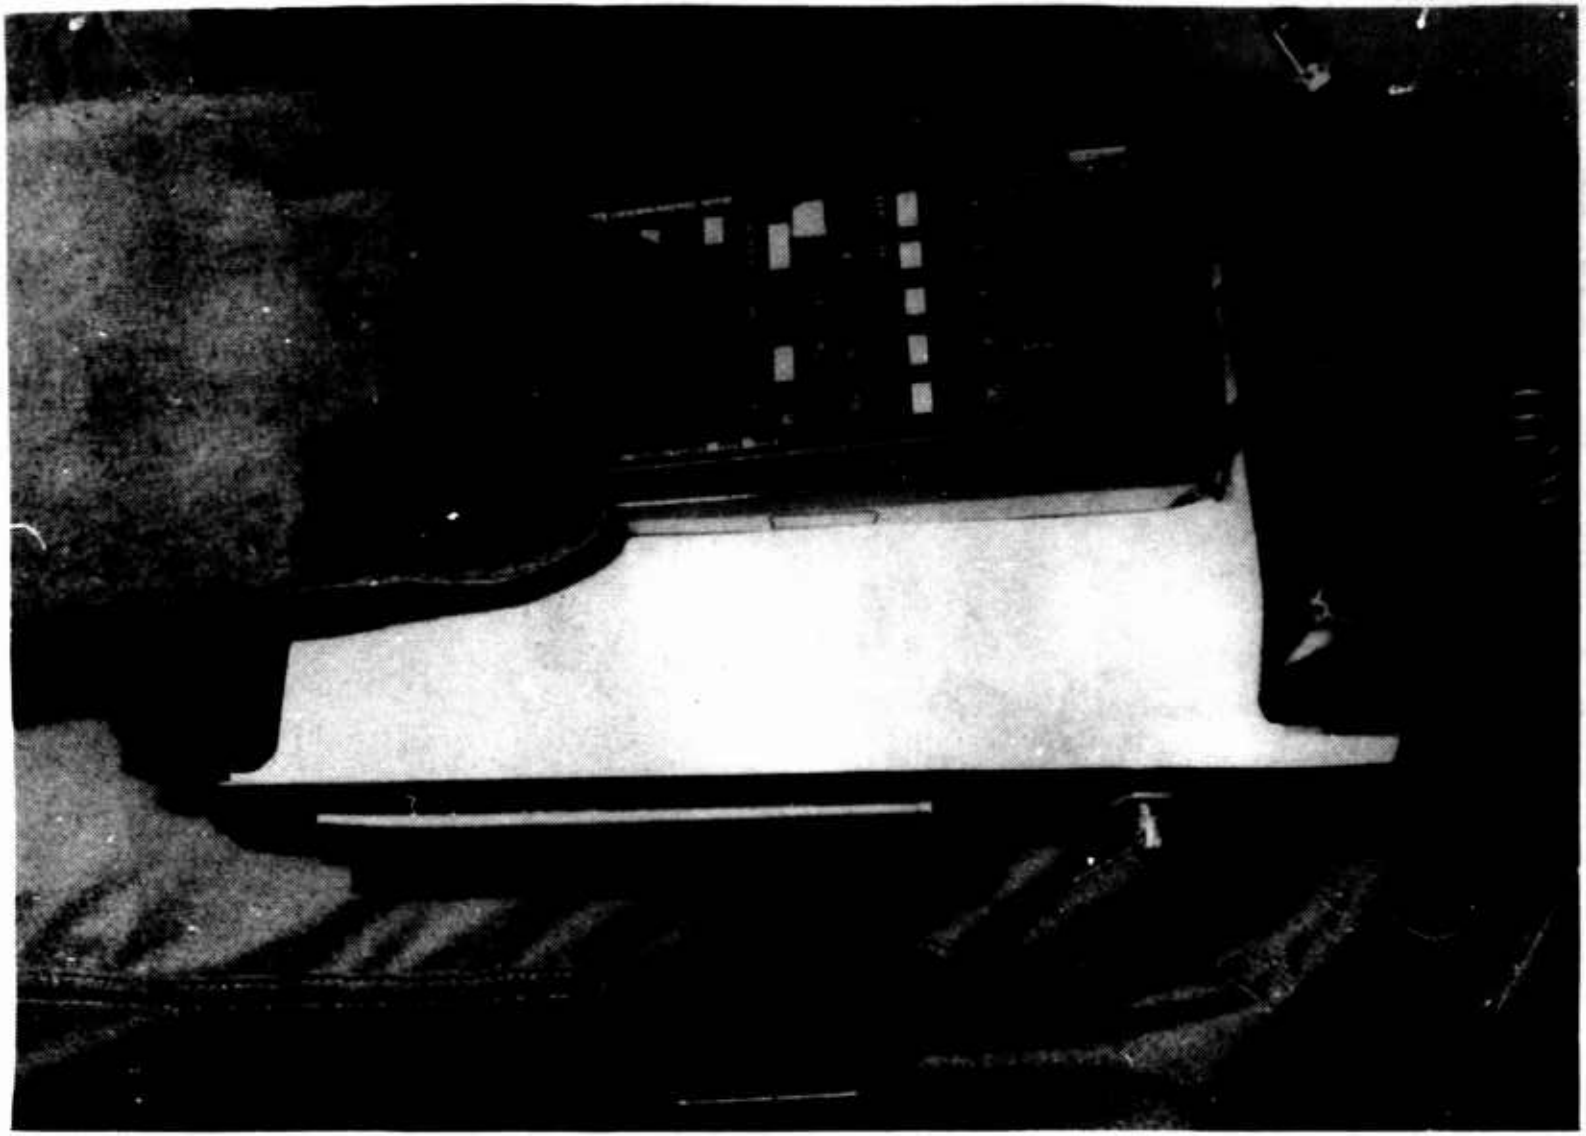


Photo 2. Flight Management Calculator

6. Twenty flights were conducted to obtain limited hover performance data and high thrust coefficient level flight performance data. Level flight data were obtained at thrust coefficients from 0.0040 to 0.0052 and referred rotor speeds from 300 to 350 rpm. These referred rotor speeds correspond to average tip Mach numbers of 0.675 to 0.788. Level flight performance tests covered: gross weight from 7020 to 9875 lb, rotor speed from 294 to 324 rpm, pressure altitude from 5520 to 14,840 feet, ambient temperature from -30.1 to +21.3 degrees Celsius, and airspeed from 20 knots (minimum usable indicated airspeed) to limit airspeed (120 knots or less depending on weight and density altitude). Performance tests were conducted at a mid cg, at zero indicated sideslip, in the clean configuration.

TEST METHODOLOGY

7. The overall adequacy of the FMC was determined by qualitative pilot comments, measured accuracy of the system and an evaluation of the range and scope of system capabilities. The pilots evaluated the instructions, time required and ease of planning for each mission flight. Note was also made when information was not available and the flight manual or another source was required. During flight the ease of use, flexibility to update information and physical suitability of the hardware were evaluated. Accuracy was determined by the ability to validate the results of the BHT evaluation (ref 6, app A), comparison of predicted values with flight measurements, and comparison of normal and optimum mission profiles. The FMC functions and data available were evaluated with respect to operational needs. The calculator program was evaluated during 14 flights to three destinations which simulated typical utility missions as closely as practical. The flights were flown by an operational pilot (not a test pilot) solely by reference to standard flight instruments installed in the aircraft. Normal flight profiles were planned using the FMC as well as the operator's manual. Optimum profiles were planned using the Prototype Optimum Cruise Charts and supplemental notes shown in appendix E.

8. Blade stall and compressibility data were obtained during level flight and hover test to complete the performance characterization for the fuel conservation effort. The referred rotor speed method was used for the level flight tests and the free flight method was used for the hover tests. All data were obtained at stable conditions in a nonturbulent atmosphere. Hover tests were flown only when winds were less than 3 knots. Data were recorded on magnetic tape in pulse code modulated (PCM). Test techniques and data analysis methods for the data in this report are described in detail in appendix D.

RESULTS AND DISCUSSION

GENERAL

9. The FMC was evaluated for flight planning and in-flight use during fourteen mission flights and calculator generated data were compared to engineering source data (ref 15). The FMC had many good features such as a very comprehensive set of limit checks. The calculator program accurately reproduced the source data. The HP-41CV calculator has significant advantages of cost, size, and availability over other electronic computing devices. The FMC's major faults were lack of an integrated flight planning mode and relatively slow execution, resulting in longer planning time using the program than using the operator's manual. Operation and instructions need simplification for operational use. To achieve a one percent accuracy may require some form of "regressive modeling" where the program is updated with current data for the individual aircraft. To improve the speed and operating complexity and add other desired features may require a more sophisticated calculator than the HP-41CV.

10. Fourteen round-trip flights were made to determine the actual fuel savings using optimum flight profiles and to evaluate the calculator and program under operational conditions. The FMC did not provide optimum airspeed or rotor speed and its optimum altitude was in error, so prototype operators manual optimum cruise charts were used to determine optimum flight profiles. Fuel savings were determined by comparing fuel use on flights using normal and optimum flight profiles. Overall fuel savings were 19% using optimum profiles compared to normal profiles. Fuel loading variation caused actual range or endurance uncertainties approaching 19%. Twenty performance test flights were conducted to provide a level flight data base in the high thrust coefficient range and to expand the hover data Mach number range. These data can be used to characterize blade stall and compressibility effects.

CALCULATOR EVALUATION

11. The FMC was evaluated primarily for enroute performance (cruise, climb and descent) during the mission flights. Additional information used for this evaluation included: (1) use of the calculator by a variety of pilots on other missions, (2) the field trials of reference 6, (3) other services performance calculators, (4) commercial aircraft performance calculators and onboard flight management computers, (5) Army operator's manuals mission planning requirements (ref 16), (6) an AEFA in-house optimum cruise demonstration program, and (7) an earlier onboard hover performance computer (lift margin system) evaluation

(ref 17). The FMC was oriented towards the field evaluation rather than towards an operational production design. This was done to permit evaluation of a variety of possible features and functions. For example, several input and output formats were used to allow selection of the most desirable formats. A production design for operational use should have a single input format and a minimum of output formats. Several functions were late additions and not fully developed. These included: weight and balance computations, more comprehensive limit checks, and engine performance variation capability. Comments and recommendations are generally oriented towards production version development of the FMC program for operational use in the UH-1H. However, some comments are applicable to other systems as well.

12. The HP-41CV calculator has been used for many performance applications. These programs generally duplicate the performance presented in the operator's manuals by using mathematical fits to existing data. This approach has two advantages. The programs can be produced by programming services with little or no knowledge of the individual aircraft thereby reducing program development time and costs. It also simplifies data verification so the program can be introduced operationally and used in place of the operator's manual data in minimum time. An alternative approach is physical analog modeling. The FMC program was a combination of copying operator's manual data and analog modeling of basic test data.

13. The FMC program allows temperature variation but limits minimum cruise speed to 85 knots (except maximum endurance) and climbs to maximum rate of climb airspeed and power. Only limit airspeed is provided for "best cruise speed". The FMC optimum altitude function is easy to use but it does not include wind effects, optimum airspeeds or rotor speed. A simple correction to specification maximum power is provided. An operational program should provide optimum power, rotor speed, airspeed and altitude for optimum climb, cruise and descent over the full range of weights and temperatures. The calculator provides easily read digital data at specific conditions.

14. Performance data accuracy is dependent on "specification" engine performance. Test experience (ref 3) indicates that fuel flow variation between engines or over the life cycle of an engine model is small (<< 5%). However, maximum power available variation is large. Test engine power available of the T53-L-13 varied 15 percent from the reference 15 tests to the reference 3 tests. The FMC incorporated a correction allowing a torque increment (relative to specification power available) input. This delta torque increment comes from the Turbine Engine Analysis Check

(TEAC) data, a maintenance procedure performed on newly installed engines. This value is accurate only at the TEAC conditions and will vary with time and engine condition. A previous method that provided better data was to determine power available from the applicable gas producer speed (N1) and measured gas temperature (EGT) relations to power and their limits (ref 17). These relationships are currently included as the "power assurance" function in FMC, however they are fixed at reference 15 test engine values. They could be established for an individual engine based on the initial TEAC and Health Indicator Test (HIT) baseline data and updated using the daily idle and HIT check data. This method has the advantage of not requiring a maximum power check and should substantially improve the prediction accuracy for power available dependent performance. Some method of updating power available with service time and engine condition should be incorporated.

Pilot Comments

15. Pilots generally responded favorably to the use of a calculator as a better method to obtain performance information. The calculator was much easier to use in flight than the operator's manual. It was determined that the calculator could be read with much greater "precision" with greater ease than the graphical operator's manual data. The requirements for preparation of operator's manual data require that the data scaling be such that it can be read to one percent precision (two percent increments) and at least as good as cockpit indicators. Some operator's manuals do not meet these requirements. Under poor conditions (in the aircraft with vibration, turbulence or darkness) this readability decreases. The output precision of the calculator can be misleading by implying much greater accuracy than actually exists.

16. Two factors reduced the acceptance of the calculator; function execution time and the tendency of user induced inadvertent stoppage. A major potential benefit of the calculator is to reduce the time and effort for administrative planning of a flight. Some FMC functions required times exceeding two minutes which prevented a reduction of planning time over use of the operator's manual. Except for the longest (Yuma) mission flights, preflight administration and planning time exceeded the flight time. Calculator/computer assistance in completing the various forms including performance planning, weight and balance and others could significantly reduce this administrative burden. The contractor indicated that search and execution time would be improved when the program was written on a production "PROM" chip. An execution time of five seconds, independent of input

time would be an acceptable goal. This may require a calculator more advanced than the HP-41.

17. The long execution time sometimes caused the user to inadvertently stop the program prior to completion because of apparent inactivity. The "input" key is actually a "run/stop" key so that pushing it while the program is running will stop the program. The FMC program showed a variety of displays while programs were executing. These did not provide the user with a program status and led to confusion as to whether or not the calculation was proceeding. This fault is inherent with the programmable calculator and can only be minimized and explained clearly in the operating instructions. A more serious difficulty encountered by most users was unknowingly switching from PDQ to basic calculator mode. The inclusion of this simple calculator mode was a serious detriment to the acceptance of the evaluation program. A production version using a programmable read only memory (PROM) chip would avoid this and allow the full calculator capability independent of the performance program. Pilot opinion of the value of the FMC covered the whole spectrum from "no conceivable value" to "an immediate necessity long overdue". The predominant opinion was that it had significant potential value but required substantial refinement with the planning mode capability the most needed modification i.e., "I want it to print my Performance Planning Card (PPC)."

Documentation

18. The users manual was poor because of apparent large volume including much information extraneous to operation and detracted from user acceptance. The single document (ref 18) contained overall project information, background information, field trail plan and methods, as well as operating instructions. The size was similar to the aircraft operator's manual and was printed on one side of the paper in fairly large print. Ultimately the calculator operating instructions should be integrated into the pertinent sections of the aircraft operator's manuals i.e., limits, weight and balance, performance, normal and emergency procedures. "Help files" as used on computers should be considered if substantial memory expansion is included or more capable calculators are used. This would require the use of a printer or auxiliary display. Other factors that need improvement include complete abbreviation definitions and, where applicable, use of established standard abbreviations. The detailed program descriptions should be supplied in a separate document.

Physical Characteristics

19. The HP-41CV calculator is one of the most capable calculators available that is truly pocket sized. Its overall dimensions are 5.6 X 3.1 X 1.3 inches. This size and the light weight of 8 ounces make it very portable. It is easy to mount on the standard kneeboard and still leaves room for notes. However, the small face that includes the display and 39 keys requires small keys closely spaced. This characteristic increases the probability of erroneous key entries. The tactile "click" provides a distinct feel when a key has been activated. However, while wearing gloves in flight in a vibration or turbulent environment correct key entry is difficult. With moderate or worse vibration, the calculator and key entry hand must be isolated from aircraft vibration by raising them from kneeboard. Using a pencil eraser helps proper entry. A "touch pad" overlay that locks over the keyboard is available, that increases the area, separates the keys and increases the pressure required to activate the key from approximately 5 to 16 ounces. Its major drawback is that it masks the tactile click, particularly with gloves. Pilots must be cautioned (as they were in ref 18) to visually check the numerical value prior to data input.

20. Another inherent limitation of the HP-41CV is the display. The built-in display consists of 12 alpha or numeric characters scrollable to a maximum of 24. The scroll rate is two per second so a full message would take 6 seconds to display. The characters are generated from a 14 segment liquid crystal display (LCD) so the number and legibility of the characters are limited. For example a question mark (?) should not be put next to numeric values because of its similarity to a seven (7); even experienced users will misinterpret the two characters. This limitation can be overcome with auxiliary electronic displays or printers where a 7 X 9 dot matrix is used for character generation. This permits use of 128 standard characters or even design of special characters for the program. If the HP-41CV is used for future performance calculators, an auxiliary lighted display should be considered. Neither the display nor the keyboard has integral lighting. BHT designed a modification to the standard pilots knee board to provide calculator lighting for the reference 6 field trials. This lighting method was not evaluated.

Accuracy

21. Calculator introduced errors will be insignificant because the ten place calculation precision is far more accurate than other error sources. The high output precision available from the program misled most pilots about the overall accuracy. For

example, altitudes were output to the nearest foot and weights to the nearest pound. Consideration should be given to reducing the output precision. The reference 19 program rounded the cruise altitude to the appropriate 500 foot altitude increment. The reference 17 computer rounded altitudes to 100 feet and weights to 10 lb. The most direct solution to this problem is to output estimated error bounds as well as most probable value for each parameter. This would require a detailed error analysis and a substantially more sophisticated program. Estimated accuracy for each major parameter should be stated to the degree practical in the calculator operator's manual. This will define and minimize the margins required for performance data uncertainty to insure safe operation.

22. Reference 6 includes demonstrations of the calculator programs ability to reproduce the source data accurately. In some cases the source data are inappropriate. For example, reference 15 engine data were used for the relationships of gas producer speed and exhaust gas temperature to power. Current operational engines are significantly different from these preproduction engines of 20 years ago. However, if some method were included in the program to correct the general relationships to current individual engine characteristics, accuracy could be improved. Another more significant example that determines UH-1H performance capability is directional control limits. The FMC used reference 15 data to determine the "10%" directional control margin. This data did not consider the variables of skid height, wind azimuth, rotor speed, control rigging or complete maneuver capability. Data published in reference 11 are considerably more accurate and include wind azimuth and wind speed at the most adverse rigging. The difference between the current (ref 11) data and the obsolete (ref 15) data could result in inadequate control at 14 knots less wind speed or 2000 lb less gross weight than predicted by the FMC. Reference 11 data should be corrected for the rotor speed error (para 62) and used in future calculator programs and UH-1H operator's manuals.

23. An overall calculator accuracy of one percent is desirable. This level of accuracy is usually adequate to allow proper decisions to be made. For example, one percent of the 9500 lb maximum gross weight, 95 lb, permits the proper decision on number of troops to be carried. One percent of 1400 pounds of fuel, 14 lb, corresponds to less than 10 percent of reserve fuel and less than two minutes flight time at the worst conditions. Because of engine, aircraft and indicator systems variability, some form of "regressive modeling" where the program is updated with current individual aircraft data, will be required to achieve this level of accuracy.

Units - Conversions

24. The calculator program parameters were generally in customary U.S. aviation units (feet, pounds, knots, etc.), except for those peculiar to the UH-1H, such as torque pressure in pounds per square inch (PSI). These units are proper and desirable. One undesirable factor for the HP-41CV 12-character display was the inclusion of the units in the output display. This used up valuable display characters that could have been used to minimize nonstandard parameter abbreviations and to include other enhancements. One exception to this is temperature units, where degrees Celsius and degrees Fahrenheit are used with nearly equal frequency. If an expanded auxiliary display or a different calculator with expanded display is used, units could be included. The calculator program had several units and parameter conversions including: degrees F to degrees C, indicated to pressure altitude, and indicated to true airspeed. The indicated to pressure altitude conversion was backwards. If a pressure higher than 29.92 in.Hg. (standard) was input, the calculated pressure altitude was higher than indicated, not lower as it should be. The mechanics of the conversions were rather cumbersome. They could be mechanized such that a single keystroke could convert from a nonstandard unit to the standard unit and the secondary (gold) key plus the conversion key would convert from standard back to the nonstandard unit. Unless substantially more memory is used or a more powerful calculator is used for future programs, unit conversions should be of secondary or lower consideration to the primary performance function requirements. If computing capability is increased, other conversions that should be considered are: fuel weight to volume (gallons) and density and metric conversions for use in the European environment.

Data Ranges

25. Data ranges should not be arbitrarily limited, such as the minimum cruise speed which was limited to 85 knots. Performance computation capability should be available for any conditions at which the aircraft can operate. With performance computation capability available for all conditions, only the limits table (following paragraph) would have to be updated for limit changes. Performance information is most important at extreme conditions because flight will be more critical and the pilot will have little or no experience there and must rely on the calculated performance information.

Data Limits

26. Limit checks are where the program halts or changes execution when input or output values exceed aircraft operating limits or

reflect impossible conditions. Limit checks serve three purposes. They prevent the pilot from inadvertently planning operations beyond approved limits. They allow the pilot to know and plan operations at limits to obtain maximum performance. Limit checks also reduce the possibility of erroneous data entry. The FMC program has a fairly comprehensive list of limit checks. In general, they are appropriate and have proper values. Their mechanization is quite cumbersome and could be improved substantially. When encountering or exceeding most limits, the FMC will not continue and the user must restart the performance calculation and input all previous valid data. A better method would be to leave the user at the input parameter that caused the limit to be exceeded. The limit value would become the new default value for that parameter so it could be used if the pilot wished to operate at the limit. This would provide an easy way for the pilot to determine limits without knowing them ahead of time or using a separate procedure to determine them. Limits should fall into two categories; those under pilot control, such as maximum gross weight, airspeed, torque; and those beyond pilot control, such as minimum aircraft weight, maximum ambient temperature or maximum power. Those limits under pilot control should be exceedable on a second try, to determine what the performance would be in an emergency situation where limit observance is secondary and to determine what the next limit is and its proximity to the lowest limit. For example, hover performance is most likely to be limited by directional control. However, if winds are not a factor the pilot might want to know his torque-limited or maximum weight-limited performance. He may also wish to know the maximum power-limited performance and its proximity to the torque limit to judge the likelihood of topping the engine if ambient temperature is different than estimated. Additionally the parameter that determines the limit should be indicated so the pilot will know which to monitor.

Input

27. Several levels of input should be preselectable. The lowest and default level should require input of the minimum number of parameters to obtain reasonably accurate performance. A higher level could include secondary parameters such as barometric pressure or humidity to improve accuracy at critical conditions. The most sophisticated input level could allow the user to pre-set the input parameter list or sequence for his calculator. The capability of the user to select, terminate or omit a calculation on the basis of an input value is a generally good concept. This was used for several of the FMC functions. Examples are the termination of cargo load items in the weight and balance function

by the input of zero weight and the deletion of the wind calculations with the input of zero wind speed. While this approach requires additional knowledge of the user to know the input value codes, it provides a convenient and efficient means of tailoring input for a given performance calculation. A single input format should be used. The following format is considered a good compromise:

(parameter name) ?= (default value) no units

With the exception of temperature, there is no ambiguity of customary aviation parameter units within the Army. They need not be used in the actual display, since they use spaces that could otherwise be used for for better parameter name definition. For the HP-41CV, more than 12 characters are undesirable since this requires scrolling the display which obscures the initial parameter name characters. While the question mark more logically belongs after the equal sign, it can easily be confused with a seven on the standard calculator display. A more sophisticated auxiliary display or calculator would allow a superimposed question mark and equal sign.

Output

28. Generally, the same considerations for input apply to output. A wide variety of approaches have been used for output presentation in existing and past performance data presentations. Enroute performance (cruise, climb and descent) can be limited to a moderate number of output parameters. The FMC has a primary cruise function as well as a maximum range, endurance and climb functions. Limit airspeed and optimum altitude were also provided as separate functions. Output from the cruise function includes: limit airspeed, fuel flow, required and available torque, ground speed, reserve fuel, enroute time and fuel used. The maximum range function is similar except that total fuel is input and distance to reserve fuel is output. Maximum climb and endurance output is time and distance. These functions can only be used at minimum power airspeed and, in the case of climb, at maximum power available. Most FMC functions provide a "manual" mode that stops at every output parameter or an "automatic" mode that pauses at intermediate output and stops at the final output. Each primary enroute function takes approximately two minutes to execute.

29. The FMC program has four hover functions: gross weight, torque, endurance, and time. Each of these functions output some combination of the following parameters: maximum hover weight and lift margin at both maximum power and for ten percent

directional control margin, maximum skid height capability, power required to hover, power available, vertical climb rate, fuel flow, hover time with remaining fuel and fuel for a given time. The operator's manual graphical data provide these parameters and in addition allow the performance problem to be worked backwards so that limiting input parameters can be directly determined. For example, for a given hover load or gross weight, maximum altitude or ambient temperature to hover can be determined. Similarly at given conditions the maximum wind velocity to maintain ten percent directional control margin can be determined. This capability should be available from the calculator program.

30. The FMC uses an even greater variety of formats for output than for input. Particularly troublesome to all users was the format with the parameter name(s) appearing on the display for only one or two seconds prior to the value(s) line. This required the user to continuously watch the calculator for up to two minutes so that he would not miss the label and end up with undefined numbers in the display. Some abbreviations and terms were not clear (such as SK HT:PDM) and in some cases disagreed with Army definitions (such as BOW: basic operating weight). The format recommended for input is also recommended for output, however, there may be some specific cases where an alternate output format is better. The concept of user selectable levels of parameters is also applicable to output. The lowest level (default) would require the minimum input and output to complete the performance planning card (PPC). The next level would add those parameters necessary to improve accuracy and provide additional output information for those missions where performance is known to be critical. The highest level would allow the user to pre-select parameters in the desired sequence. This would allow termination of the output sequence for any performance function after obtaining information required for a particular mission. This sophistication may be beyond the capability of the HP-41CV calculator.

Specific Performance Comments

31. The following paragraphs discuss specific functional areas of the FMC and performance areas not in the program.

Weight and Balance:

32. The FMC weight and balance function is logically organized, requires minimum input and provides most needed output quickly. However, it was added late in the development and was not fully developed. Several improvements are needed. The interaction

with other functions, providing gross weight and load information, was a good feature, but not allowing fuel weight input within the function was objectionable. Weight and balance is usually the first step in planning so all required input should be within the function. For missions not requiring a weight and balance computation direct input of gross weight, load, fuel weight and possibly cg data to the main program should be retained. Default values should be provided for all inputs. Limit checks against cg limits and precautionary areas must be provided, possibly with instructions for revised loading if limits are exceeded. The limit checks had the same fault as other functions in that input errors or exceeding limits required the user to start the function over. The program should return to the input that exceeded the limit, with the limiting value provided as default and all previous valid input retained. The type of aircraft fuel system input should be removed from the calculator program if all UH-1 aircraft have been converted to crashworthy systems. The fuel computations should include provisions for the standard internal auxiliary fuel tanks. They could be automatically invoked if fuel load is greater than normal capacity. One possible additional dedicated input is the cargo hook load. In addition to the total moment, cg and gross weight, the function should provide any other information required on the weight and balance form. A related feature not part of the weight and balance function was the capability to operate in either of two modes, aircraft gross weight or load weight. The two modes allowed the user to work with gross weight or just cargo, equipment, and passenger load, whichever is most convenient. While conceptually good, this feature required additional knowledge and confused some users.

Ground/Taxi Operations:

33. There are no provisions for ground operations, specifically engine start and idle fuel use. Engine idle fuel flow is approximately half of normal cruise fuel flow and two thirds of optimum cruise fuel flow. Hover/air taxi fuel flow is greater than cruise fuel flow. Therefore, ground engine operation will have a significant effect on overall range and endurance and must be considered to plan missions accurately. The default 3 foot skid height, within the hover time function, could be used for air taxi. Ground/taxi fuel use calculations could be mechanized to input a single fuel used value based on experience or previous calculations. Inputing zero ground fuel would then invoke the detailed calculations for ground idle time, flight idle time and hover/taxi time prior to takeoff and output and adjust initial fuel for total ground fuel used. For multi-engine helicopters this becomes even more complex since single engine, dual engine and auxiliary power unit (APU) time must be considered.

Engine Performance:

34. The FMC has a "power assurance" function that provides gas producer speed (N1) and exhaust gas temperature (EGT) for a given input power (torque and the assumed fixed rotor speed). The relationships used are obsolete and in error. However, even with current data and proper characterization, input of measured individual engine baseline data will probably be required to achieve useful accuracy. In addition to N1 and EGT, fuel flow as a function of power (torque and rotor speed) should be included so that it can be determined independent of any particular performance phase or maneuver.

Hover:

35. The four FMC hover functions (gross weight, torque, time and endurance) could be combined into two or possibly a single function. Maximum performance values could be returned for the default values at the input request. The hover weight input request could have a default value equal to the maximum hover weight and the hover time input request could have a default value equal to the total time available with remaining fuel. The hover gross weight function outputs power-limited and directional-control-limited maximum gross weights. A better method would be to provide maximum wind velocity for adequate pedal margin at the selected hover gross weight and conditions using current operator's manual data (ref 11, app A). Alternatively, the maximum weight for adequate pedal margin could be output for a given windspeed input. In a planning mode, fuel used for an input hover time should be subtracted from fuel remaining prior to takeoff.

Takeoff:

36. The FMC program does not provide takeoff performance data. Takeoff performance data (distance required to clear a 50 foot obstacle) is useful for tactical helicopter operations at calm wind and level surface conditions. The calculator could allow more complex data than can be provided in the operator's manual. For example, it could calculate the maximum safe load that can be flown as winds and temperature vary from a given area where obstacle height and distance are known. The tradeoffs between an uphill or downwind takeoff under conditions where one or the other is required could also be calculated. Recent operator's manual takeoff data have been presented with most independent parameters in terms of maximum IGE hovering skid height. Therefore, takeoff performance could be added to the hover performance function since IGE height is already computed when out-of-ground effect (OGE) hover is not possible.

Climb - Descent:

37. Except for the vertical climb output from hover the only climb and descent performance available from the FMC is maximum performance climb at maximum power and best rate of climb airspeed. This performance, based on specification power available, is not practical since flying qualities are poor at the airspeed and maximum power (topping) is difficult to maintain accurately. The time, fuel and distance traveled during climb or descent at any airspeed and power must be accounted for to accurately plan range or endurance.

Winds and Temperature:

38. The FMC has two levels of wind input. If zero windspeed is input, all calculations are made with groundspeed equal to true airspeed and no further wind input is requested. If wind speed is not zero, wind direction and course are requested and groundspeed is corrected for winds. The corrections are made as though course is actually heading and are in error. For example, a 90 degree cross wind to the course results in no difference between groundspeed and true airspeed calculations. With a 90 degree crosswind, groundspeed will be less than true airspeed because of the crab angle required. Determination of true optimum cruise altitudes requires input of wind variation with altitude and flight path.

39. The FMC calculated temperature at altitude (assuming standard adiabatic lapse rate of -2 degrees C per thousand feet) from an input temperature and altitude. Temperature observations during the mission tests showed this method using surface temperature and altitude would result in temperature under estimated by as much as 13°C at cruise altitude. This temperature difference would result in a 2% error in planned range or fuel use at a given altitude. It could cause errors in determining optimum altitude of as much as 4000 feet which would cause up to 6% error in planned range or fuel use. This temperature error could also result in optomistic planned maximum hover capability of as much as 1100 lb. Performance can be recalculated in-flight with actual temperature input to correct planned performance.

Emergency Performance:

40. The FMC provides no emergency performance information. The most significant emergency performance information for the single engine UH-1H are the airspeeds and rotor speeds for minimum rate of descent and best glide in autorotation. Height - velocity information would also be useful for planning. For multi-engine

helicopters there is a multitude of additional information required for one engine out performance.

Future Development

41. Future performance calculators must include a planning mode that runs more or less automatically requiring minimum special knowledge and input from the user. The planning mode should do all necessary calculations between flight phases and provide output or print any required forms. For inflight use, five seconds from last input to the desired output is an acceptable time. Regressive modeling in which current individual aircraft data is used to update the program may be necessary to achieve acceptable accuracy under operational conditions. Automatic data input from aircraft sensors would make available updated performance data. Such a system using the HP-41CV system with available peripherals is technically feasible. For the UH-1H, airspeed (dynamic pressure) and air temperature, preferably compressor inlet temperature, would be required. For modern aircraft all necessary signals may be available on a data buss. A display would also significantly enhance the in-flight benefits of the performance calculator. This combined with the automatic data input feature of the HP-41CV could provide continuous data presentation. The changes recommended in this report would tax the capability of the current HP-41CV calculator. There are more advanced calculators available that should be considered. Integration of performance data into current and future aircraft that have general purpose computers and displays could have additional safety and mission enhancement benefits.

42. The portable calculator provides a means to determine both planning and in-flight performance data and the potential to both improve the data and reduce the effort. The use of fixed base computers could improve planning capability and complement the portable calculator's capabilities. The ability to access other data bases could also significantly enhance flight planning. Reference 20 describes a system using a small personal sized computer to integrate performance and weather data. Additional integration should include accessing local data bases for aircraft configuration, condition, baseline performance data, navigation and possibly tactical data. For a portable calculator such as the HP-41CV, the ground based computer could load the planning data and other precomputed data such as optimum cruise profiles which are beyond the computing capability of the calculator. For aircraft where a performance computer is installed, such data would be transferred by some data storage medium. In-flight data different from the planned data would alert the pilot to changed conditions, malfunctions and other reasons to reconsider

the planned data. Electronic data storage and performance computing capability, from portable calculators through onboard computers to fixed base computers, can enhance the productivity, efficiency, utility and safety of helicopter flight.

MISSION FLIGHTS

General

43. Fourteen mission test flights were made from Edwards AFB, California to three destinations: Los Angeles International airport, Los Angeles, California; Bishop airport, Bishop, California; and Laguna Army Airfield, Yuma Proving Ground, Arizona. The "normal profile" flights to and from Yuma required a fuel stop at Palm Springs, California. Two mission flights were flown to and from each destination. Flight routes were planned using the most direct route considering airspace restrictions and terrain suitable for forced landing following engine failure at cruise altitude. One leg of each round trip was flown using "Normal" flight profiles and the other using "Optimum" flight profiles. An approximation of fuel savings was made by comparing results from "Normal" and "Optimum" flight profiles. Time history data for the mission flights are shown in figures 1 through 10, appendix F. These flights covered a spectrum of UH-1H range capability, air traffic control constraints, weather conditions, and other operational variables. Mission test flights were designed to simulate operational missions as closely as practical. The flights were flown by operational pilots (not test pilots). Three different flight crews were used. The engine models used were the T53-L-13B and the T53-L-703.

44. Normal flight profiles were in accordance with the UH-1H Aircrew Training Manual (ATM), reference 21, appendix A, and current training procedures. Optimum flight profiles were determined from the Prototype Optimum Cruise Charts and supplemental notes extracted from reference 2, included as appendix E. The major difference between the two profiles was the rotor speed and altitude used during cruise flight. The normal flight profile used maximum rotor speed (defined as normal) and the optimum flight profiles used minimum rotor speed. Normal flight profile altitude was established relative to terrain and optimum altitude was that which gave maximum specific range for the conditions.

45. To the extent possible, missions were planned using the FMC. Planning aspects such as time, ease of operation and accuracy of the FMC were compared to normal planning using the operator's manual. Most of the minimum required (PPC) performance information

such as hover performance and V_{NE} was available from the FMC. Some of the performance information such as directional control limits was substantially in error. It was intended to plan the mission flight profiles using the FMC and compare FMC predicted flight performance with actual performance measured by test instrumentation. However, because some information was not available, optimum flight profiles could not be determined from the FMC. It contained no information on optimum rotor speed, airspeed, climb and descent power or airspeed schedules. The FMC optimum altitude was several thousand feet higher than appendix E optimum altitude and at the mission flight conditions always above 10,000 feet, the limit for continuous cruise without supplemental breathing oxygen. The FMC operating instructions indicate that V_{NE} is "recommended cruise velocity". V_{NE} is provided by the FMC. At the test conditions, maximum range, calm wind, cruise airspeed is at or slightly below V_{NE}. However, at temperatures below standard, maximum range airspeed is as much as 25 knots below V_{NE}. This difference has a large effect on range and fuel use. Additionally, maximum range airspeed decreases by approximately 40% of the tail wind magnitude. The FMC predicts fuel used only during the cruise portion of the flight, and does not include fuel used during idle, taxi, takeoff, climb or descent. This FMC data is compared to fuel use and maximum range mission test data in paragraph 64.

Flight Conditions

46. Flight conditions for the mission flights are summarized in table 1. The flights were conducted under Visual Flight Rules (VFR) to minimize route or time deviation requirements from Air Traffic Control (ATC) facilities. ATC constraints were minimal on the Bishop flights (E-H), requiring only VFR departure and arrival procedures from the Edwards complex. ATC constraints for the high traffic density Los Angeles flights (A-D) were extensive. Flight E to Bishop encountered intermittent light rain and light to occasionally moderate turbulence. Flight H from Bishop was in similar weather, and slight route deviations were required to maintain VFR cloud separation requirements. Flights K through N were in light or occasionally moderate turbulence. Flight N required both route and altitude deviations to maintain cloud separation. For the other mission flights, the weather conditions were clear with no more than light turbulence.

47. With one exception, mission flight conditions were established and maintained by reference to standard uncalibrated production indicators. The sensitive test rotor speed indicator was used to limit minimum rotor speed to the true value. Use of the standard indicator with its systematic error would have

Table 1. Mission Flight Conditions Summary

Flight	Departure	Destination	Technique	Engine	Fuel Type	Gross Weight (pounds)	Pressure Altitude (100 ft)	Air Temp. (°C)	Rotor Speed (rpm)	True Airspeed (knots)	Average Head Wind (knots)	Distance Direct (n.mi)	Distance Flt Rte (n.mi)	Calc Air Dist (n.mi)
A	Edwards AFB, CA	Los Angeles, CA	Normal	T53-L-13B	JP-4	8044-7637	4-40	18-23	324-325	88-116	-3.5	65	76	73.3
B	Edwards AFB, CA	Los Angeles, CA	Optimum	T53-L-13B	JP-4	8067-7788	83-84	13-14	310-311	100-105	+4.1	65	66	68.9
C	Los Angeles, CA	Edwards AFB, CA	Normal	T53-L-13B	JP-4	7788-7421	7-44	21-24	320-321	94-115	-4.1	65	76	72.9
D	Los Angeles, CA	Edwards AFB, CA	Optimum	T53-L-13B	JP-4	7637-7340	93-96	9-10	323-324	104-110	+3.7	65	66	68.5
E	Edwards AFB, CA	Bishop, CA	Normal	T53-L-13B	JP-4	8102-7361	29-45	23-26	319-321	94-120	-3.8	149	151	145.7
F	Edwards AFB, CA	Bishop, CA	Optimum	T53-L-13B	JP-4	8086-7418	84-105	12-18	310-312	95-109	-2.1	149	150	147.1
G	Bishop, CA	Edwards AFB, CA	Normal	T53-L-13B	Jet-A	8104-7333	26-43	26-31	321-322	85-115	-3.4	149	151	142.8
H	Bishop, CA	Edwards AFB, CA	Optimum	T53-L-13B	Jet-A	8070-7379	92-95	12-13	310-312	92-107	-1.7	149	150	147.6
I	Edwards AFB, CA	Palm Springs, CA	Normal	T53-L-703	JP-4	8094-7497	22-75	11-18	319-323	89-115	+0.9	95	97	97.9
J	Palm Springs, CA	Yuma, AZ	Normal	T53-L-703	Jet-A	8162-7374	-3-9	25-28	318-321	93-110	+6.1	120	122	130.1
K	Edwards AFB, CA	Yuma, AZ	Optimum	T53-L-703	JP-4	8099-6962	96-100	9-11	294-311	97-108	+9.2	212	213	233.9
L	Yuma, AZ	Palm Springs, CA	Normal	T53-L-703	JP-4	8035-7300	8-38	23-27	316-321	91-110	+4.3	120	122	127.5
M	Palm Springs, CA	Edwards AFB, CA	Normal	T53-L-703	Jet-A	8112-7511	8-68	12-29	318-321	86-105	+11.4	95	97	110.6
N	Yuma, AZ	Edwards AFB, CA	Optimum	T53-L-703	JP-4	8038-7050	78-105	7-11	295-312	94-110	-2.9	212	213	207.2

Table 2. Mission Flight Performance Summary

Flight	Time (hrs:min)	Block Speeds Airspeed (knots)	Block Speeds Grnd.Spd (knots)	Fuel Used Weight (pounds)	Fuel Used Volume (std.gal)	Fuel Remaining Weight (pounds)	Fuel Remaining Volume (std.gal)	Specific Range Air (NAMPP)	Specific Range Ground (NGMPP)	Range to Reserve Fuel (naut.mi) Remaining air	Remaining ground	Total Available air	Total Available ground	Savings Time (hr:min)	Savings Dist (n.mi)	Savings Fuel (lb)	Savings Fuel (gal)
A	0:46.4	94.8	98.3	407	62.6	890	136.9	.1800	.1867	143.4	148.7	216.7	224.7	-	-	-	-
B	0:42.8	96.6	92.5	279	43.0	1041	160.2	.2469	.2366	201.1	192.5	270.0	258.5	0:03.6	10	128	19.7
C	0:45.1	97.0	101.1	367	56.5	674	103.7	.1986	.2071	106.0	110.4	-	-	-	-	-	-
D	0:40.3	102.0	98.3	297	45.7	593	91.2	.2307	.2222	99.2	95.6	-	-	0:04.8	10	70	10.8
E	1:23.2	105.1	108.9	741	114.0	611	94.0	.1966	.2038	95.1	98.6	240.8	249.6	-	-	-	-
F	1:26.3	102.2	104.3	668	102.8	668	102.8	.2202	.2246	121.9	124.4	269.0	274.4	-0:03.1	1	73	11.2
G	1:20.4	106.6	110.0	771	118.6	583	89.7	.1853	.1958	88.4	91.2	231.2	242.2	-	-	-	-
H	1:29.8	98.6	100.3	691	106.3	638	98.2	.2136	.2171	113.3	115.3	260.9	265.3	-0:09.4	1	80	12.3
I	1:01.6	95.4	94.5	597	91.8	754	116.0	.1640	.1625	113.1	112.0	211.0	209.0	Flight	-	-	-
J	1:19.0	98.8	92.7	788	121.2	630	96.9	.1651	.1548	79.3	74.4	209.4	196.4	0:05.3	-	-	-
I-J	3:50.6	59.3	57.0	1385	213.1	-	-	.1647	.1581	-	-	-	-	Enroute	-	-	-
K	2:15.3	103.7	94.4	1137	174.9	209	32.2	.2057	.1873	9.1	8.3	243.0	221.3	1:35.3	6	248	38.2
L	1:17.6	98.6	94.3	735	113.1	537	82.6	.1734	.1660	69.8	66.8	197.3	188.8	Flight	-	-	-
M	1:11.1	93.3	81.9	601	92.5	748	115.1	.1840	.1614	114.7	100.6	225.3	197.6	0:30.6	-	-	-
L-M	3:31.7	67.5	62.1	1336	205.6	-	-	.1782	.1639	-	-	-	-	Enroute	-	-	-
N	1:58.1	105.3	100.2	986	152.0	296	45.5	.2097	.2156	28.9	29.7	236.1	242.7	1:33.6	6	348	53.5

resulted in rotor speeds significantly be the minimum rotor speed limit. While the pilots used the standard instruments during flight, the flight conditions and performance shown in tables 1 and 2 were determined from test instrumentation using methods described in appendix D. The following paragraphs discuss each of the conditions in table 1.

Loading and Fuel Quantity:

48. Nominal loading was 8100 lb engine start gross weight which represents 1000 lb payload, a crew of two and full fuel for an operationally-configured aircraft. A mid longitudinal cg (fuselage station (FS) 137) and a mid lateral cg were used. Precise fuel loading was not attempted, since this was considered an operational variable. Therefore, engine start gross weight varied with the actual fuel loading from 8035 lb to 8162 lb. The test aircraft had 205.7 gallons (gal) usable capacity in a level attitude. The actual fuel volume capacity varies approximately 5 gal per degree of lateral attitude with an increase for left side low and a decrease with a right side low. Longitudinal attitude has no significant effect on capacity. Fuel capacity variation with aircraft lateral attitude should be considered when fueling for missions that require maximum range or endurance. This information should be included in the operator's manual.

49. Fuel density also impacts maximum cruise capability and for the mission flights ranged from 6.34 lb/gal for flight L to 6.70 lb/gal for flights J and M. Jet fuel density variation with temperature is -0.00657 lb/gal/deg C. The combined volume and density variation resulted in mission fuel weights from 1087 lb on flight L to 1233 lb on flight J, a 13 percent variation. Precise planning should utilize the fuel quantity indicator which reads out in lb of usable fuel remaining. This instruction should be included in the operator's manual.

50. Where the objective is minimum fuel consumption rather than maximum range or endurance, minimum fuel weight rather than maximum is desired. Ideally, the aircraft should land as the low fuel warning activates, with cooldown and shutdown accomplished on reserve fuel. At low altitude and cruise speeds from maximum endurance to maximum range, the weight of additional fuel burned per hour is approximately two percent of the excess weight. For example, if the aircraft lands after a one hour flight with 200 lb more fuel than required for reserve, an additional 4 lb fuel consumption would occur during the flight. This increases to approximately three percent at optimum altitude. The excess weight fuel burn at speeds below best endurance speed increases to ten percent or more at hover or nap-of-the-earth speeds,

depending on weight and altitude. This applies to any excess weight carried on a flight, not just fuel. A suitably developed performance calculator or onboard performance computer would minimize the margins required for aircraft performance uncertainty.

Cruise Conditions

51. Pressure altitude, ambient air temperature, rotor speed and true airspeed ranges for the cruise portion of each mission flight are summarized in table 1. Additionally, sideslip angle did not exceed six degrees for any recorded cruise condition. The latest operator's manual (ref 11, app A) does not contain any information on optimum cruise conditions (other than the normal calm wind "best" cruise speed.) The FMC optimum altitude was several thousand feet in error compared to reference 15 data. The calculator contains no information on optimum airspeed, rotor speed, wind effects on optimum conditions or optimum climb and descent, power and airspeed schedules. Therefore optimum profiles were determined from appendix E data adjusted to normal VFR cruise altitudes and by AR 95-1 crew oxygen use rules. The test aircraft had oxygen but it is not normally available in UH-1H aircraft. Portable oxygen systems are available and integral oxygen generators using engine bleed air are under development (ref 22, app A). Except for very light weights or cold temperatures the majority of cruise altitude benefits can be achieved at 10,000 feet or less.

Cruise Altitude and Temperature:

52. Normal flight profile cruise altitudes were nominally 1500 feet above ground level (AGL) with pressure altitudes from -300 feet to 7500 feet, as terrain elevation varied. Optimum flight profile cruise altitudes varied from 7500 to 10,500 feet mean sea level (MSL), depending on weight, rotor speed and ambient temperature. Pressure altitudes were from 7800 to 10,500 feet. Ambient temperature at cruise altitude averaged approximately 15 degrees C above standard for the flight altitudes. The optimum rotor speed gains in cruise performance were minimal at these warm temperatures and cruise performance improvements will increase at colder temperatures compared to these test results (see fig. B, ref 3).

Cruise Rotor Speed:

53. Normal cruise indicated rotor/engine speed was 324/6600 rpm. This has since been reduced to 314/6400 by reference 11. On the first round trip to Los Angeles, rotor speed was inadvertently set using the test indicator at the normal 324 rpm value for the

entire flight (flights A and D). The use of the production rotor/engine tachometer indicator during other flights resulted in actual rotor speeds of 318 to 323 rpm. While this error improves cruise performance, it has other serious implications discussed further in the instrument accuracy section (para 62). For the optimum mission flights the rotor/engine speeds were minimum allowable: 314/6400 rpm above 7500 lb, and 294/6000 rpm below 7500 lb gross weight. The 304 rotor rpm limit below 8000 lb allowed by reference 14 for these tests was not used as it is not proposed for an operational limit.

Cruise Airspeed:

54. The normal mission cruise airspeeds were selected by the pilot, on the basis of vibration and comfort. They were usually in the 90 to 100 knot indicated airspeed range. This resulted in cruise true airspeeds from 85 to 120 knots with a variation of as much as 28 knots on a flight. Optimum cruise airspeeds were determined from reference 10 and modified per information in appendix E. They were usually above limit airspeed (V_{NE}) and therefore limited to V_{NE}. Optimum flight profile cruise true airspeeds varied from 92 to 110 knots. Optimum cruise speeds varied a maximum of 16 knots on a flight but generally varied less than 10 knots. Reference 23 indicates that cruise, climb and descent performance improvements can be obtained by reducing airspeed variation. The FMC program does not provide optimum cruise airspeed for maximum range. Instructions for the calculator indicate that V_{NE} should be used for "best" range (high speed for 99% of maximum calm wind specific range). V_{NE} was available from the calculator. At cold temperatures maximum range airspeed falls significantly below V_{NE}.

55. Except at cold temperatures, cruise airspeed is limited by V_{NE} or continuous power below the high airspeed for 99 percent maximum specific range for a large majority of weights and altitudes. For the UH-1H, maximum range (ground distance) airspeed changes by approximately 40 percent of the effective headwind (difference between true airspeed and ground speed). Future calculator development should include corrections to maximum range cruise speeds for winds. Operator's manuals should include the effects of winds on maximum range cruise airspeed.

56. Limit airspeed for the UH-1H is the most restrictive limit affecting cruise performance. It precludes increasing airspeed for headwind or for the optimum descent schedule, which decreases range or fuel savings. While the V_{NE} algorithm appears simple (120 knots calibrated airspeed to 2000 feet density altitude then decreasing by 3 knots per 1000 feet and one knot for each 200 lb

above 7500 lb), it is not practical to compute in flight on the basis of flight manual information. With the FMC, the computation is easy and should increase observance of V_{NE}.

Winds and Distance

57. Air distance for each mission flight was determined by integrating true airspeed over the flight time. Dividing air distance by flight time gave the average true airspeed. Average ground speed was determined by dividing flight route distance by flight time. The difference between average true airspeed and ground speed was the average effective wind speed. The maximum effective headwind of 11.4 knots occurred on flight M. These winds generally agreed with distance measuring equipment (DME) derived winds which were available a small percentage of the time. The overall average headwinds were 1.0 knots for the normal flight profile flights and 1.8 knots for the optimum flight technique flights. Mission planning was based on winds aloft forecasts. The wind corrections to maximum range airspeed described in appendix E could not be made. Although cruise speed could have been decreased for tailwinds, the calm wind best cruise speed was not available from either the calculator or the operator's manual at the mission flight conditions.

58. Wind speeds can be of comparable magnitude to helicopter cruise airspeeds. The calculator optimum altitude and the optimum altitude shown in appendix E are based on calm wind optimum altitude. True optimum altitude will be a function of wind variation with altitude. In addition to aircraft optimum altitude, appendix E provides a method of comparing range performance at one other altitude. To find the true optimum altitude using these charts requires an iterative approach. Future calculator development should directly provide true optimum cruise altitude including effects of winds. This will require input of wind variation with altitude and route of flight. The calculator should also provide a means of correcting planned cruise performance for actual winds determined in-flight.

Indicator Accuracy

59. Calibrations for standard production indicators and systems are shown in figures C-5 through C-15, appendix C. The mission flights were planned and flown without knowledge of the calibrations on the part of the flight crews. The gas temperature error of four degrees C, the gas generator speed error of 0.4 percent, the torque indicating system error of 1 psi, the altimeter error of -50 feet and the airspeed indicator error of 2 knots, while undesirable, were acceptable and had no significant

effect on cruise performance. The airspeed position error of +3 to -4 knots is corrected in both the calculator and operator's manual.

60. The static position altitude error, shown in figure C-6 appendix C for the roof mounted system, is not significant for cruise performance. The basic position error at zero sideslip angle in level flight was as much as -80 feet.

61. The fuel quantity indicating system, figure C-7, appendix C, had errors of +130 to -100 pounds (+10 to -7 percent). The system was calibrated along with the sight gage calibration. The indicator system had relatively small errors at full and empty fuel which are the only points checked operationally. Past UH-1 fuel quantity systems have had maximum errors as small as 5 lb, limited only by the readability of the gage, indicating that the potential accuracy is very good. The error of the system used for this project was conservative in that it indicated less fuel than actual as minimum fuel was approached. However, it was nonconservative in that it indicated lower fuel flow than actual during the first 15 to 30 minutes of flight when the fuel consumption check is made. The fuel quantity system check and adjustment procedures in the maintenance manuals are not clear or comprehensive. Required information is scattered throughout the fuel system description and trouble shooting procedures. Consideration should be given to including intermediate points in addition to full and empty points in the quantity checks. The full fuel weight is determined by using the published full fuel volume and assumed JP-4 standard density. The fuel quantity check and adjustment procedure accuracy could be improved by measuring fuel density since the system is a capacitance system that measures fuel mass not volume. Additional information concerning fuel quantity measurement can be found in appendix D.

62. The engine output shaft speed calibration is shown on figure C-12, appendix C. The rotor speed needle (fig. C-11) of the dual tach has poor resolution (20 rpm increments - twice the normal operating range) and the scale is hidden behind the engine tach needle. The engine speed indicator had an 80 to 90 rpm error in the allowable operating range. This corresponds to a 4 to 4.5 rpm rotor speed error or nearly half the normal operating range. The error is such that true rotor/engine speed is less than indicated. This error appears in all AEFA UH-1H's. If this error is fleet wide, it needs to be corrected or component fatigue life, replacement times, performance and operating information need to be revised to reflect it.

Mission Flight Performance

63. Time history data of mission flight conditions and performance are shown in figures 1 through 10 appendix F. Mission flight performance is summarized for each flight in table 2. Flight time is measured from lift off to touchdown. The combined flights I-J and L-M also include ground time required for refueling at Palm Springs. Block speeds are the total air or ground distance divided by the total time. Fuel used is the total fuel used from engine start to shutdown. It includes approximately 50 lb used for start, warm up, hover-taxi, takeoff, cool down, and shutdown where no distance was traveled. Weight converted to gallons using standard JP-4 density (6.5 lb/gal) is also shown. Fuel remaining is the total fuel remaining at engine shutdown. Specific range is the total air or ground distance traveled divided by the total fuel used. Range to reserve fuel is the range that would have been available had the flight been continued and engine shutdown occurred at nominal reserve fuel (185 lb). Range remaining is slightly conservative in that it was calculated based on the last cruise specific range and the remaining mission fuel. Specific range would actually improve slightly because of decreasing weight. Total available range is the sum of actual distance (air or ground) traveled plus the calculated remaining range. The savings presented are the differences between the performance obtained on the comparative normal and optimum profile flights. Time savings are the difference in flight times. Distance savings are the difference in flight route distances allowed by the higher optimum profile cruise altitudes. Fuel savings are the differences between total fuel used for the comparative flights.

FMC Comparison:

64. Mission flight fuel used and maximum range data are compared to FMC cruise functions data for flights A through H in table 3. The FMC fuel used and maximum range data was computed for constant cruise at the average cruise conditions of table 1 (except rotor speed) over the same distance as the mission flights, with table 1 start fuel and gross weight. The FMC cruise and range functions provide the only enroute fuel use data. Sufficient information is included in the UH-1H operator's manual to more precisely compute range performance and includes idle, taxi, climb and descent fuel use. However, this is a long and error prone procedure. It could be simplified with a fully developed calculator flight planning mode. The fuel used and maximum range data show the FMC data are optimistic by as much as 68 lb and 8.8% fuel, and 15.8 nautical miles and 6.8% more range than determined from the test data. One flight was conservative by

Table 3. Comparison of Mission and FMC Cruise Performance

Flight	Fuel Used, lb				Maximum Range N. Mi.			
			Difference				Difference	
	Mission	FMC	lb	%	Mission	FMC	N. Mi.	%
A	407	375	-32	-7.9	216.7	224	+7.3	+3.4
B	279	316	+37	+13.3	270.0	267	-3.0	-1.1
C	367	367	0	0	178.9	175	-3.9	-2.2
D	297	297	0	0	167.7	175	+8.3	+4.4
E	741	707	-34	-4.6	240.8	248	+7.2	+3.0
F	668	659	-9	-1.3	269.0	275	+6.0	+2.2
G	771	703	-68	-8.8	231.2	247	+15.8	+6.8
H	691	663	-28	-4.1	260.9	273	+12.1	+4.6

37 lb of fuel use. The difference in performance would be even larger using planning information since actual fuel loads were as much as 170 lb less than the standard planning fuel load. The fuel use error from the FMC generally agrees with the fuel flow performance data trends (fig. 61, app F).
Overall Comparison:

65. Data from the normal flight profile flights were summed and compared to the sum of data from the optimum flight profile flights. Total normal fuel use was 5007 lb. Optimum fuel use was 4060 lb, a saving of 947 lb or 19 percent. Average normal fuel flow rate was 551.8 lb/hr. Average optimum fuel flow rate was 475.2 lb/hr a saving of 76.6 lb/hr or 11.8 standard gallons/hour. Total normal flight time was 9 hours, 4 minutes. Total optimum flight time was 8 hours, 33 minutes a saving of 32 minutes. If the Palm Springs refueling time is charged to the normal flights, enroute time difference increases to 3 hours, 5 minutes. Part of the time and fuel savings was obtained from the more direct flight routes available at the higher optimum altitudes (34 fewer ground miles and 28 fewer air miles). Additional benefits of the higher optimum altitude cruise are: increased gliding distance and landing area available in the event of an engine failure forced landing, improved navigational aid range (both electronic and visual), increased communication range and generally smoother air above surface turbulence.

66. Block true airspeeds (including takeoff, climb, cruise and descent segments) were very similar with normal flight profile yielding 99.3 knots and optimum flight profile 102.2 knots. The fuel remaining at engine shutdown represents excess weight carried on the flight which increased the fuel consumption an additional two to three percent of this weight per hour. Overall normal specific ground range was 0.1782 nautical ground miles per pound of fuel used (NAMPP) increasing to 0.2113 NAMPP for the optimum flight profile. Calculated total ground range available varied from 189 to 250 nautical miles for the normal technique and 221 to 274 nautical miles for the optimum flight profile. These all exceed the planning value of 170 nautical miles which would permit higher headwind or lower full fuel loads. A better measure of actual aircraft performance is specific air range, since it excludes the uncontrolled variables of wind, air distance and fuel load. Overall specific air range for the normal flights was 0.1799 NAMPP, and for the optimum flights it was 0.2151 NAMPP. The normal specific range is significantly less than that calculated from reference 15 cruise specific range data and the optimum specific range is slightly less than calculated. If the approximately 50 lb of nonproductive ground fuel is subtracted, normal average specific range increases to

0.1954 NAMPP and optimum increases to 0.2323 NAMPP. The normal value approximates the calculated value, and the adjusted optimum specific range exceeds the calculated value approximately 5%.
Distance Comparison:

67. Additional information can be obtained by comparing flight profile on a destination - distance basis. The Bishop flights (E-H) show the smallest variation. This could be expected since the normal cruise altitude was closer to the optimum altitude than on other flights. Also most of the optimum flight was above 7500 lb gross weight so the more efficient 294 rotor rpm was not used. Specific air range was 0.1908 NAMPP (normal) and 0.2169 NAMPP (optimum), a 13.7 percent improvement. With the ground fuel subtracted these values increase to 0.2043 NAMPP (normal), 0.2341 NAMPP (optimum) and 14.6 percent improvement. The Los Angeles flights (A - D) gave the best corrected specific air range and the greatest optimum profile improvement. Overall NAMPP was 0.1889 (normal) and 0.2385 (optimum), a 26.3 percent gain. Corrected for ground fuel the NAMPP was 0.2169 (normal), and 0.2887 (optimum), a 33.1 percent improvement. The Yuma flights (I - N) yielded the lowest specific ranges, 0.1713 NAMPP (normal) and 0.2076 NAMPP (optimum), a 21.2 percent difference. Corrected for ground fuel the values are 0.1925 NAMPP (normal), 0.2291 NAMPP (optimum), a 19.0 percent difference. The lower normal specific range could be expected since the cruise pressure altitude was very low for the majority of the flight. Engine specific fuel consumption increases significantly as altitude decreases.

Climb and Descent Gains:

68. The increasing specific air range and optimum cruise gains with decreasing distance (para 67) indicate there is a net benefit from the climb and descent portion of the flight, compared to the cruise portion. The optimum climb and descent becomes a larger percentage of the flight as distance decreases. This apparent benefit from climb and descent can be rationalized several ways. Figure 1, appendix F shows that nearly half the flight distance is spent descending with reduced power and fuel flow, and increased specific range and vehicle efficiency, compared to the cruise. A relatively shorter time is spent climbing at higher power and fuel flow. From an efficiency viewpoint, the overall vehicle efficiency (engine efficiency times effective lift/drag) drops during the climb for a short time by an amount approximately equal to the increase during the descent over a larger period of time (figs. 1 through 10, app F). If the vehicle system is credited with the potential energy gain

during the climb, and debited for the descent, there is no significant difference between climb and cruise while a smaller increase remains during the descent. This occurs because the engine efficiency improves substantially as power increases which essentially compensates for the reduced lift/drag of the helicopter during the increased power climb. The descent profile was chosen to keep the engine power, and therefore vehicle efficiency, as high as practical during the descent.

Optimum Flight Profiles:

69. The climb and descent power and airspeed schedules used for the optimum flight profile mission flights are described in appendix E. These schedules were estimated from historical data (ref 15, app A), modified for practical considerations and tested to a very limited extent during the reference 3 tests. Formal optimization methods were not used. The climb schedule consisted of a maximum power climb at an indicated airspeed 10 knots less than the optimum altitude cruise indicated airspeed. This produced a near maximum rate of climb at low altitude where the engine was less efficient and a decreasing rate as optimum altitude was approached. Time to climb to optimum altitude was usually less than 10 minutes. The original descent schedule was to maintain cruise power and increase airspeed to achieve a 500 feet per minute (fpm) descent. Airspeed or vibration limits usually precluded this schedule and maximum practical airspeed with power reduced to achieve the 500 fpm descent was used.

70. The performance of idealized flight profiles shown in figure 1 was computed. These profiles included baseline cruise at sea level, constant cruise at 13,000 feet average optimum altitude, cruise climb to remain at optimum altitude from approximatly 11,500 feet to 14,500 feet, a climb cruise descent profile similar to that in references 24 and 25 including various rates of descent, the profile in appendix E, and an unconstrained series of climbs and descents. The profiles were generated for standard temperatures using specification (ref 26, app A) power available and fuel flow. Power required was derived using reference 27. Optimum altitude was determined from appendix E. A constant 314 RPM rotor speed was used and a constant 108 knot true airspeed was used for the cruise segments of the profiles. Start weight was 8000 pounds and the climb schedules described in appendix E were used for those profiles having climbs. The climb used a constant 80 knots calibrated airspeed and 1100 horsepower to approximately 9000 feet then decreasing to approximately 900 horsepower at 14,000 feet. The performance data was integrated over 1000 foot increments for the climbs and descents and 15 minute increments for the cruise segments. Comparisons were made by determining the distance traveled for 1000 lb of fuel.

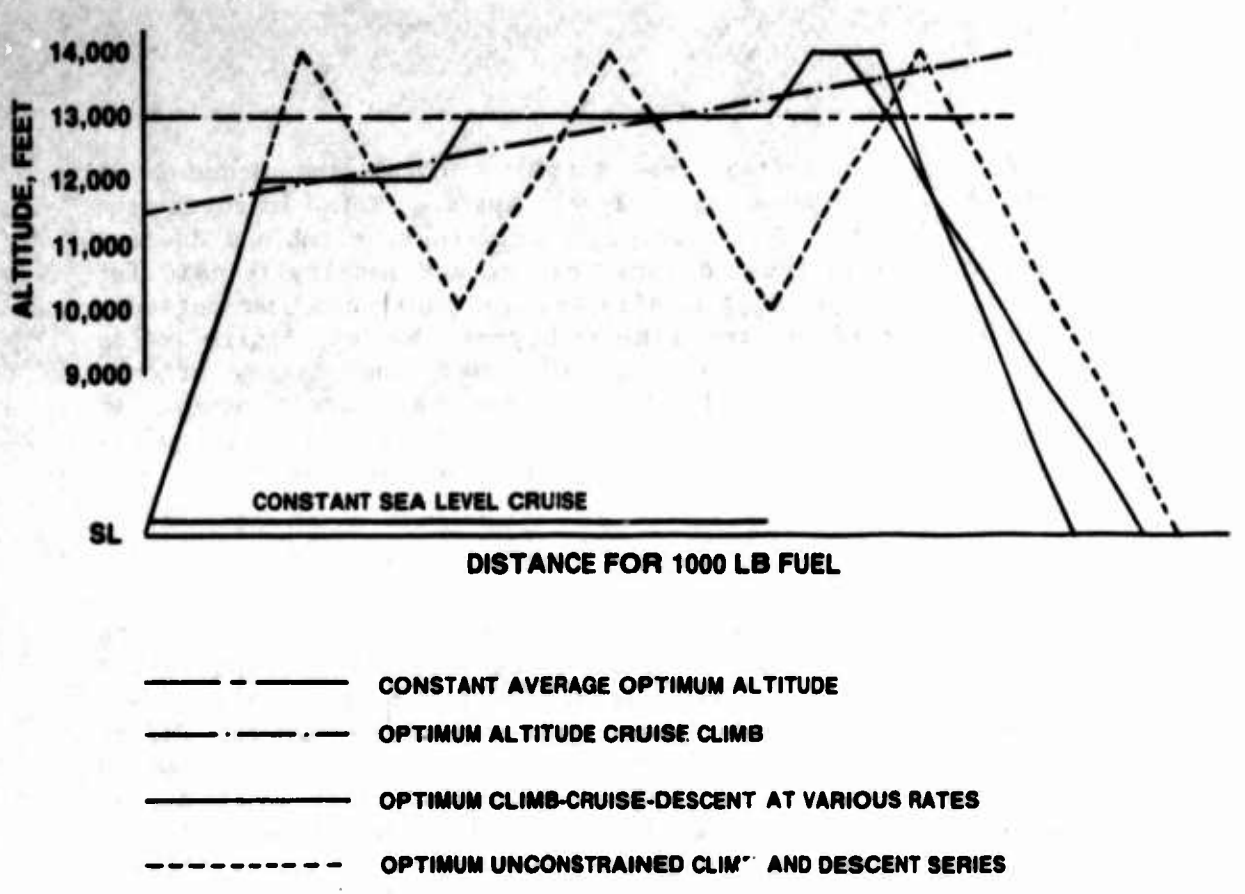


Figure 1. Optimum Flight Profile Comparison

71. The constant sea level cruise gave 194 nautical miles (NM). The constant 13,000 foot cruise gave 252 NM. This decreased slightly to 250 NM for the optimum altitude cruise climb. Both references 24 and 25 altitude profiles use airspeeds near optimum cruise speed and indicate maximum practical rate of descent is optimum for helicopters of similar size to the UH-1H. A rate of descent of 1000 fpm gave a range of 252 NM, 2000 fpm gave 265 NM, and autorotation (approximatly 2500 fpm) gave 252 NM. The original appendix E descent schedule gave a distance of 252 NM and the series of climb and descents gave 257 NM. Since these were less than expected from the mission flight results trends, a limited study at these idealized conditions was made of the effects of vertical speed on maximum specific range airspeeds and specific range. This study showed that level flight maximum specific range speed should be increased approximately one knot for each 100 fpm rate of climb and decreased one knot for each 100 fpm rate of descent. The appendix E descent schedule was revised to reflect this result so that descent airspeed should be decreased 10 knots from level speed for the Army standard rate of descent of 1000 fpm. Using this revised schedule increased the appendix E profile distance to 263 NM. The series of climbs and descents was modified further to climb at maximum

range level speed (after the initial climb) and descend at 500 fpm, 5 knots below best level speed. This improved the distance to 278 NM. While the gains from these climb and descent profiles are small, they do show that no net penalty is paid for climb and descent, as long as airspeed and power are near optimum. True optimum profiles are likely beyond the capability of a calculator and would require ground based computer solutions. This would be enhanced if the computer had direct access to weather data (temperature and wind variation with altitude). Such solutions could then be loaded into the calculator.

PERFORMANCE TESTS

72. Level flight performance and limited hover performance tests were made to supplement the data of the reference 3, appendix A tests. The overall objective is to develop a mathematical performance model that can be used in the calculator and has flight test and theoretical basis. Such a model will be required to achieve acceptable accuracy for individual aircraft under operational conditions. The general approach to date has been similar to that of reference 28. This analysis uses an empirical characterization of blade stall and compressibility effects. A compressibility characterization based on potential flow compressibility correction has been developed and independently refined in reference 27. It can duplicate the reference 3 data within one percent. However analysis of reference 15 data indicates this correction is increasingly inaccurate above thrust coefficients of 0.004, the limit of reference 3 data. A thrust coefficient of 0.004 approximates optimum altitude conditions. The sensitivity of compressibility effects to thrust coefficient increases nonlinearly above this value and stall effects may become significant. Emphasis during this test was on the higher thrust coefficients. Use of a higher powered T53-L-703 engine enabled tests over a larger range of conditions.

Level Flight Performance

73. Level flight performance tests were conducted at thrust coefficients from 0.004 to 0.0052, referred rotor speeds from 300 to 350 rpm, and airspeeds from minimum indicated airspeed to limit airspeed. The tests were all flown at zero indicated sideslip and a mid longitudinal and lateral cg. Data are shown in figures 11 through 54, appendix F. For each test two figures are presented.

Hover Performance

74. Out-of-ground effect hover performance tests were conducted at the hot and cold weather test sites to expand the rotor tip Mach number range. The free flight technique was used and winds were less than 3 knots. Nondimensional rotor and engine power coefficient data are shown on figure 55. Engine power coefficient data corrected for compressibility and linearized are shown on figure 56.

Engine Characteristics

75. Engine performance parameters recorded during these tests included torque, fuel flow, measured gas temperature, gas generator speed and output shaft speed. These parameters were "referred" using relationships obtained from the engine manufacturer. With the exception of inlet temperature rise, installation conditions were taken from reference 15. The inlet temperature rise used was three degree C. Reference 17 analytically determined a rise of 2.9 degree C, for a very similar inlet. Referred engine characteristics data are compared to the engine calibration data and predictions from the engine model specification computer programs on figures 61 through 67, appendix F. The model specification performance was determined using references 26 and 32, appendix A for the T53-L-13B and references 31 and 33 for the T53-L-703 engine. Reference 33 results are suspect in some areas and are being updated.

Power Available

76. Military and continuous power available for the T53-L-13B engine were derived from the engine specification. The data and the installation losses used are shown on figures 68 and 69, appendix F. Maximum test engine power agreed well with figure 68 when a three degree C inlet temperature rise was used. Military and continuous power for the T53-L-703 derived from the engine specification are shown on figures 77 and 78. This power available data has some anomalies and is suspect because of discontinuities with altitude and temperature and inability to run at some allowable condition. Maximum power from the T53-L-703 engine could not be tested within the test conditions because of drive train limits. A relatively simple mathematical model of power available is derived in reference 17, appendix A. This model is analogous to the operation of the "N1 bias" curve of the T53 fuel control. It should be suitable for a calculator power available function, particularly if it is corrected to an individual engine baseline.

Fuel Flow

77. The engine model specification fuel flow for the T53-L-13 at three different output shaft speeds is shown on figures 70 through 73, appendix F and for the T53-L-703 on figure 79. Fuel flow is shown as a function of power and altitude at 0 degree C, with an independent function of the variation with temperature. Operator's manuals for the T53 indicate the fuel flow variation with temperature is one percent for each 10 deg C deviation from zero. This variation along with other parameters is presented on figures 74 and 80 for each engine. Fuel flow variation with temperature was found to be more consistently described by fuel flow per horsepower. These data are shown on figure 75 for four different output shaft speeds for the T53-L-13 engine and summarized on figure 76 as a function of referred output shaft speed. Calibration and test data are also shown on figure 76 where fuel flow variation with temperature and total fuel flow are a strong function of output shaft speed. This same approach to defining fuel flow deviation was applied to the referred fuel flow data, figure 61, to produce a deviation of measured T53-L-13 fuel flow from specification fuel flow on figure 62. While the data do show a large difference from specification fuel flow, they also show relatively consistent trends with power, referred output shaft speed and altitude. This indicates that a simple fuel flow model could be derived using the model specification as a basis. The test data also show that the fuel flow improvement with altitude is not as large as the model specification would predict except at very high referred power. The uninstalled engine test cell calibration data, obtained near sea level standard conditions, agree well with the engine model specification. This difference between test and calibration data indicate that the model specification does not accurately predict the effects of altitude or that installation losses are incorrect. Engine installation losses for the current UH-1H configuration should be determined by test. This same analysis was not done for the T53-L-703 engine.

CONCLUSIONS

GENERAL

78. The FMC performance calculator has the potential to facilitate flight planning, increase mission performance, and provide greater safety. A form of "regressive" analog modeling in which the program is updated with individual aircraft data may be required to achieve acceptable accuracy. The calculator program evaluated has many good features and functions which should be retained in future programs. It needs significant improvement in the areas of planning, complexity, instructions and calculating speed. Improvements will require additional memory and perhaps a more advanced calculator.

SPECIFIC

79. The following conclusions were a result of the FMC calculator evaluation:

a. The calculator program accurately reproduced the source data from which the functions were derived (para 22).

b. The calculator high output precision was erroneously perceived by most evaluation pilots to be a measure of the accuracy (paras 15 and 21).

c. A one percent overall accuracy is desirable and acceptable. To achieve this accuracy will likely require that individual aircraft data be used to update the program for engine, aircraft and measurement system variation. The HP-41CV system is capable of automatic data input (paras 23 and 41).

d. The calculator execution time was more than two minutes for some functions. Five seconds from last input to first output would be an acceptable execution time (para 16).

e. The absence of a planning mode to integrate and accumulate results from each flight phase, the absence of some data such as idle fuel flow, and the slow execution resulted in longer times to plan a flight using the calculator than using the operator's manual (paras 16, 33 and 41).

f. The calculator was much easier to use in flight than the operators manual (para 15).

g. Because of the calculator physical characteristics, it was difficult to avoid erroneous data input in flight (para 19).

h. The weight and balance function was well designed and required minimum input while quickly providing most needed output. It needs some refinement, such as load limit checks, for operational use (para 32).

i. Input termination or option selection, determined by input value, such as terminating loading input by inputing zero load, is a good concept (para 27).

j. The units used were proper, however their inclusion in the limited HP-41 display decreased the readability (para 24).

k. The limit checks were good and comprehensive. Their mechanization needs improvement (para 26).

l. The use of the program could be simplified if maximum performance values such as maximum range or maximum hover weight were provided as default upon input request (paras 26, 28, 29 and 35).

m. Takeoff performance could be added to the hover performance function (para 36).

n. Time, distance and fuel used during climbs and descents at any power and airspeed are not provided and are needed for accurate range and endurance determination (para 37).

o. FMC fuel use and range data are optomistic by as much as 8.8 percent fuel use and 6.8 percent range (para 64).

p. The temperature prediction algorithm can result in significant errors based on temperature - altitude profiles observed during this test. (para 44).

q. The wind computation for groundspeed was in error (para 39).

r. The indicated to pressure altitude conversion was in error (para 24).

80. The following conclusions were a result of the mission flight tests:

a. A 19 percent fuel savings was achieved using optimum cruise flight profile at temperatures approximately 15 degrees C above standard. Greater savings can be expected at colder temperatures where compressibility effects increase (paras 52 and 65).

b. True optimum cruise altitude and airspeed are significantly affected by winds and wind gradients with altitude (paras 55 and 58).

c. Optimum climb and descent profiles do not decrease range performance and may improve it, as long as airspeed and power schedules are near optimum (para 71).

d. Aircraft lateral attitude during fueling significantly affects fuel capacity (para 48).

81. The following conclusion was reached as a result of the performance tests and data analysis:

a. A compressibility correction algorithm predicts past UH-1H fuel conservation power required data within one percent up to optimum altitude. It is inaccurate above optimum altitude and needs further development (para 72).

b. A simple and accurate power available model, adjustable to individual engine performance, is feasible (para 76).

c. A simple and accurate fuel flow model is feasible (para 77).

82. The following conclusion was made regarding the UH-1H: The engine power output shaft speed tachometer system appears generally in error by 80 to 90 rpm (para 62).

RECOMMENDATIONS

83. The following recommendations are made with regard to future performance calculator development.

a. Future performance calculators must have a planning mode that runs more or less automatically, requires a minimum of computer knowledge and instructions and produces at least the minimum information required (paras 16 and 41).

b. Future performance calculators should accurately compute performance for any conditions at which the aircraft can operate so that major modifications are not required as limits or operating procedures change (para 25).

c. The calculator should allow determination of performance for conditions beyond operating limits that are under the control of the pilot. Those limits not under the pilots control should be absolute (para 26).

d. Consideration should be given to providing several levels of input and output parameters, with the lowest (default) requiring and providing a minimum of information and the highest being established by the user to meet his specific requirements (paras 27 and 30).

e. If the HP-41CV is used for future performance programs, an auxiliary display should be considered (para 20).

f. Emergency performance, such as autorotation, should be included in future calculator programs (para 40).

g. The effects of winds on maximum range airspeed and altitude should be included in future calculator programs (paras 55 and 58).

h. Some method of updating power available with service time and engine condition should be incorporated in future performance calculators (para 22).

i. The estimated accuracy of major parameters should be included in future calculators operator's manuals.

j. The current UH-1H operator's manual directional control data should be corrected for the rotor/engine speed indicator error and used in future UH-1H performance calculators (para 22).

84. The following recommendations are made with regard to UH-1H manual changes or additions:

a. Include in the operator's manual the effect of lateral attitude on fuel capacity (para 48).

b. Include in the operator's manual the instruction to use the fuel quantity indicator when more precise performance planning is required (para 44).

c. The fuel quantity system accuracy checks and instructions need improvement. The test aircraft met these checks with a ten percent error (para 61).

d. Research current use of non-crashworthy fuel systems throughout the fleet. If there are none, delete all information and references to them from the manuals and future calculator programs (para 32).

e. The effects of winds on maximum range airspeed should be included (para 55).

f. The current UH-1H operator's manual directional control data should be corrected for the rotor/engine speed indicator error (para 22).

85. The following recommendations are made regarding studies of the UH-1H helicopter:

a. The engine installation and accessory losses of the current configuration UH-1H should be determined by tests (paras 75 and 77).

b. The generality of the output shaft speed (N2) tachometer system error needs to be determined. If it is fleetwide, the error should be corrected or else the performance and operating information needs to be revised (para 62).

APPENDIX A. REFERENCES

1. Letter, DAVTE-M, USAAEFA Project 81-01-1, subject: Report, Fuel Conservation of US Army Helicopters, Part 1 Flight Operations Improvement Analysis, 28 January 1982.

2. Letter, USAAEFA Project 81-01-2, subject: Report Fuel Conservation of US Army Helicopters, Part 2 Development and Evaluation of Fuel Conservation Formatted Data, 23 October 1981.

3. Final Report, USAAEFA Project 81-01-3, *Fuel Conservation of US Army Helicopters, Part 3 UH-1H Flight Testing,* August 1982.

4. Final Report, USAAEFA Project 81-01-4, *Fuel Conservation of US Army Helicopters, Part 4 OH-58C Flight Testing,* August 1982.

5. Final Report, USAAEFA Project 81-01-5, *Fuel Conservation of US Army Helicopters, Part 5 AH-1S Flight Testing,* January 1983.

6. Final Report, Number 205-099-158, *UH-1H Flight Management Calculator Field Evaluation,* Bell Helicopter Textron, September 1983.

7. Letter, AVRADCOM, DRDAV-DI, Subject: Test request No. 81-01-6, Fuel Conservation of US Army Helicopters, Part 6, Performance Calculator Evaluation, 21 September 1983.

8. Letter, DAVTE-M, Subject: Test Plan, USAAEFA Project No. 81-01-6, Fuel Conservation of US Army Helicopters, Part 6, Performance Calculator Evaluation, 18 November 1983.

9. Technical Manual, TM 55-1520-210-10, *Operator's Manual, US Army Model UH-1D/H Helicopters,* with change 13, 25 August 1971.

10. Technical Manual, TM 55-1520-210-10, *Operator's Manual, US Army Model UH-1D/H and EH-1H Helicopters,* 18 May 1979, with change 19, 14 March 1984.

11. Technical Manual, TM 55-1520-210-10, *Operator's Manual, US Army Model UH-1H/V Helicopter,* 15 July 1985.

12. Detail Specification, Bell Helicopter Textron, No. 205-947-177, *UH-1H Utility Helicopter FY-74 Procurement,* 15 May 1973.

13. Manual, *HP-41 Owner's Handbook and Programming Guide,* Hewlett-Packard Company, September 1980.

14. Letter, AVSCOM, DRSAV-E, Subject: Airworthiness Release for UH-1H S/N 69-15532 for USAAEFA Project 81-01-6, et al 16 January 1984, with revision 2, 26 July 1984.

15. Final Report, USAAEFA Project 66-04, *Engineering Flight Test of the YUH-1H Helicopter (Phase D Limited)*, November 1970.

16. Letter, AVSCOM, AMSAV-GR (R-MCP), Subject: Aviation School Requirements for Performance Data Changes for Mission Planning, 25 June, 1969.

17. Final Report, USAAEFA Project No. 73-01, *Helicopter Lift Margin System and Slow Speed Performance Evaluation*, August 1977.

18. Manual, Bell Helicopter Textron, *Performance Data Quick Flight Management Calculator User's Guide*, Version 3, Release 0, 19 April 1983.

19. Article, AOPA Pilot, New Product Evaluation: Beech Aircraft Corp. Flight Planning Calculator, September 1980.

20. Article, United States Army Aviation Digest, *Atmospheric Sciences Laboratory: Weather Intelligence Enhances Capabilities*, April 1985.

21. Field Circular, US Aviation Center, FC 1-211, *Aircrew Training Manual, Utility Helicopter, UH-1*, 31 July 1984.

22. Final Report, USAARL Report No. 84-6, *In-Flight Evaluation of Two Molecular Sieve Oxygen Concentration Systems in US Army Aircraft (JUH-1H and JU-21G)*, March 1984.

23. Technical Paper, Kathy H. Abbott and Charles E. Knox, NASA 2383, *Reference Energy-Altitude Descent Guidance*, January 1985.

24. Technical Memorandum, G. L. Slater and H. Erzberger, *Optimal Short-Range Trajectories for Helicopters*, NASA TM 84303, December 1982.

25. Technical Paper, G. L. Slater and M. Stoughton, *On-Line Determination of Optimal Flight Paths for Helicopters*, American Helicopter Society Symposium, May 1984.

26. Model Specification, Lycoming Division, Avco, *T53-L-13B (LTC1K-4F) Shaft Turbine Engine Specification No. 104.33*, September 1964, Revised September 1969.

27. Technical Memorandum, Dr. R. Macmillan, Leigh Instruments Limited, *AISLIS: Modification of USAAEFA Compressibility Algorithm to Fit UH-1H Helicopter Performance Curves*, November 1, 1983.

28. Technical Paper, Barclay Boirun, *Generalizing Helicopter Flight Test Performance Data,* Proceedings, American Helicopter Society Symposium, May 1978.

29. Proposal, Bell Helicopter Textron, *Composite Main Rotor Blade for UH-1H Helicopter,* number 205-199-602 Vol. 6, Part 2 performance, March 1982.

30. Final Report, USAAVLABS TR 68-57, *Installation of a High-Reduction-Ratio Transmission in the UH-1 Helicopter,* May 1969.

31. Model Specification, Lycoming Division, Avco, *T53-L-703 (LTC1K-4G) Turboshaft Engine Specification No. 104.43,* May 1974, Revised February 1981.

32. Computer Program, Lycoming Division, AVCO, *Estimated Steady State Performance Computer Program,* FILE NO. 19.28.25.03 July 1982.

33. Computer Program, Lycoming Division, AVCO, *Estimated Steady State Performance Computer Program,* File No. 19.04.32.00 Received December 1981.

APPENDIX B. FLIGHT MANAGEMENT CALCULATOR AND AIRCRAFT DESCRIPTION

FLIGHT MANAGEMENT CALCULATOR

1. The flight management calculator (FMC) consists of the Hewlett-Packard HP-41CV programmable scientific pocket calculator, hardware modifications to the calculator, and the program, "Performance Data Quick (PDQ)" version 3, release 1.

Calculator

2. Overall dimensions of the HP-41CV calculator are 5.6 X 3.1 X 1.3 inches. This size and the light weight of 8 ounces make it very portable. The size makes it easy to mount on the standard kneeboard and still leave room for notes. However, the face is small and the 39 keys are small and closely spaced. A tactile "click" indicates key activation which requires approximately 5 ounces of force. The built-in display consists of 12 alpha or numeric characters scrollable to a maximum of 24. The scroll rate is two per second so a full message would take 6 seconds to display completely. The characters are generated from a 14 segment liquid crystal display (LCD) so the number and legibility of the characters are limited. Neither the display nor the keyboard has lighting. The calculator is powered by 4 size N batteries which last approximately six months, or a rechargeable battery pack. The calculator has Federal Communications Commission (FCC) approval for use in aircraft. The basic HP-41CV was augmented with three random access memory (RAM) chips which give it approximately 6500 eight bit bytes memory capacity. A byte of memory will store one alpha or numeric character or approximately one program step. A sign, decimal exponent and ten-digit constant, the calculator precision, can be stored in a 7 byte register. The calculator also has more than 200 mathematical and system functions available that can be directly executed or executed under program control. The calculator may be interfaced with printers, computers and many other peripheral devices.

Modifications

3. The FMC modifications include: a key cap to prevent switching into program mode, which could cause alteration of the program; paint blanking of the normal HP-41CV key function labels; a custom key label overlay; velcro backing for attachment to the pilot's kneeboard; and a chip cap to prevent demounting the extended memory chips which would cause loss of the program from memory. The chip cap would not be required on a production system as the program would be written on "programmable read only memory" (PROM) chips, which would preclude loss or alteration of the program by the user. Program memory and, therefore,

program capability could be greatly expanded by adding PROM chips. PROM chips up to 3200 bytes are available which would provide more than 20 times current program capacity when installed in all four available ports.

Program

4. The program, PDQ, generally duplicates the performance and weight and balance information currently in the UH-1H operator's manual (ref 11, app A). Information not currently available in the operator's manual that can be obtained from PDQ includes: optimum cruise altitude, hover endurance, pressure altitude calculated from indicated altitude, cruise ground speed, and power assurance calculations which predict compressor speed and exhaust gas temperature relation to torque. Information that is available from the operator's manual but not included in PDQ include: autorotation performance, takeoff performance, idle fuel flow, optimum cruise airspeed, cruise performance below 85 knots, climb, and descent, (except maximum endurance and maximum climb performance which are included in PDQ). The PDQ program contains no information on optimum airspeed, rotor speed, wind effects on optimum conditions or optimum climb and descent, power and airspeed schedules. The program is thoroughly documented in reference 6. The documentation includes the functions used to describe each type of performance (generally fifth order polynomials) and compares them to the source data. The program is coded in HP-41 calculator language. Particular features of the program are discussed in more detail in the results and discussion section of this report.

TEST AIRCRAFT

5. The test aircraft, production UH-1H, USA S/N 69-15532, is shown in photos B-1 through B-8.

Weight and Balance

6. Prior to testing, the aircraft empty weight (including full oil and undrainable fuel) and horizontal center of gravity (cg) location were determined with calibrated scales. Vertical cg was determined by suspending the helicopter from the top of the rotor mast and measuring the resulting attitude. The empty weight was 6024 lb including approximately 900 lb of test instrumentation. The cg was fuselage station (FS) 147.887, buttline (BL) 0.005, waterline (WL) 67.194. Total fuel capacity in a level attitude was determined to be 207.2 gallons from a fuel drained condition. Unuseable fuel is stated as 1.5 gallons giving a total useable capacity of 205.7 gallons.



Photo B-1. Test Aircraft - Nose View



Photo B-2. Test Aircraft - Right Front Quarter View



Photo B-3. Test Aircraft - Right Side View



Photo B-4. Test Aircraft - Right Rear Quarter View

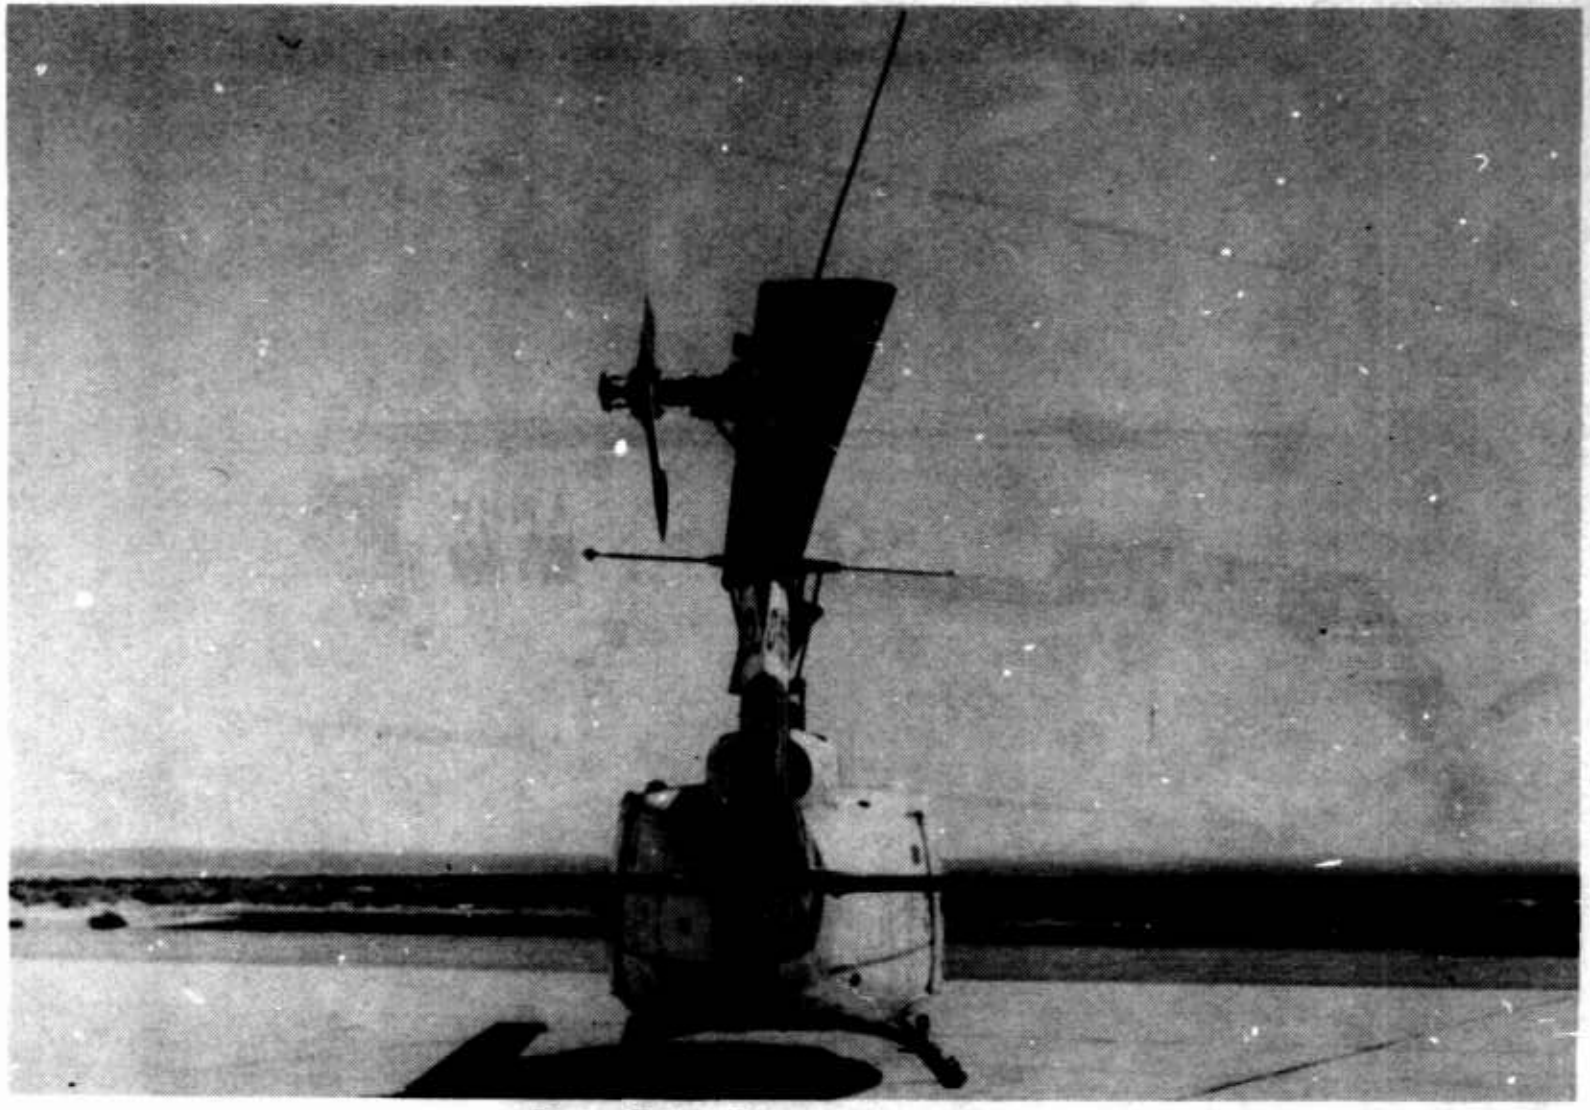


Photo B-5. Test Aircraft - Rear View



Photo B-6. Test Aircraft - Left Rear Quarter View



Photo B-7. Test Aircraft - Left Side View



Photo B-8. Test Aircraft - Left Front Quarter View

Control Rigging

7. The following main rotor tip static blade angles were measured with the collective control full down, rotor mast vertical, rotor hub horizontal and stabilizer bar horizontal:

Cyclic Position			Tip Blade Angle (degrees)			
Longitudinal	Lateral	Rotor Azimuth	0°	90°	180°	270°
Neutral	Neutral		+0.80	- 1.00	-3.00	- 1.22
Full Forward	Neutral		+1.74	-13.25	-3.12	+10.37
Full Aft	Neutral		-2.32	+ 9.80	+0.92	-12.55
Neutral	Full Left		+9.00	+ 2.30	-11.70	- 4.35
Neutral	Full Right		-9.69	- 1.10	+ 7.10	- 0.83

Note: Reference rotor azimuth (0°) is aft.

a. The variation of average tip blade angle with collective position was:

Collective Position (%)	0	25	50	75	100
Avg. tip blade angle (deg)	-1.11	+2.03	+5.85	+9.70	+12.67

b. The average blade pitch to flap angle coupling was -0.052 degrees/degree over the full flapping angle variation of 23.2°.

c. Mast angle forward tilt with the aircraft in a level attitude was 5.1 degrees and lateral angle was zero degrees. Transmission mount stiffness (determined during the vertical cg measurement) was approximately 100,000 in.-lb moment/degree deflection about an assumed pivot of FS 140.249, WL 59.433.

d. The tail rotor was rigged several times during the project as the instrumented tail rotor gear box was installed for engineering tests and removed for ferry flights etc. The installation and rigging were done per applicable maintenance instructions and met operational rigging checks but varied substantially. Full left pedal blade angle varied from -15.9 degrees to -19.0 degrees. Blade angle travel measurements varied from 23.5 to 24.1 degrees. Blade angle measurements were averaged for each blade at each flapping stop with ground hydraulic power applied. Without hydraulics, maximum blade angle is reduced approximately 0.5 degree at each stop (1.0 degree travel reduction). Dynamic blade angle limits in flight are known to vary significantly from static ground measurements.

This variation was not determined. The last rigging (applicable to the mission and hot weather performance flights) was: full left pedal blade angle = -18.9 degrees; full right pedal blade angle +4.6 degrees. Tail rotor flapping stops were set at ±7.5 degrees.

e. The synchronized elevator rigging measured on the top (flat) surface relative to the aircraft reference line was:

	Left Side	Right Side
Full forward cyclic	+2.7 degrees	+4.0 degrees
Full aft cyclic	-0.3 degrees	+1.0 degrees
Maximum nose down (approximately 40% from full fwd cyclic)	-2.9 degrees	-1.7 degrees

Note: This rigging is approximately 0.6° nose down from nominal.

External Instrumentation

8. Several items of external test instrumentation probably increased the parasite drag of the fuselage and profile drag of the rotor compared to an operational aircraft in clean configuration. The amount of drag increase was not determined. These items included: test airspeed boom including yaw and pitch sensing (YAPS) head and ram air temperature probe, dew point sensor, tail rotor slip ring assembly, tail rotor collective potentiometer and cover, main rotor slip ring assembly, hub instrumentation and wiring harness, main rotor blade strain gages, and paint zone markings (for icing tests). These items are shown in photos C-1 through C-14, appendix C. Additionally, the main rotor blades had significant leading edge erosion and numerous (acceptable) dents, having accumulated 2205 hours of their 2500 hour retirement life. From a drag standpoint, the test aircraft is probably representative of a worst case fleet UH-1H in clean configuration, with the possible exception of those with rotor infrared radiation (IR) suppressive paint.

Standard Configuration Variation

9. There is a wide variety of modifications and equipment installed in operational UH-1H helicopters that may affect performance or operating characteristics. Some items are inherent differences, such as the airspeed systems; some are in the process of being retrofitted to the fleet, such as the wire strike protection system; some are currently in development and may be incorporated in the near future, such as the composite main rotor blade. The

only significant change made to the test aircraft during this project was the replacement of the standard T53-L-13B engine with the T53-L-703 engine for the hot weather tests. This resulted in empty weight increase of 9.5 lb and a slight aft shift in the cg. The T53-L-703 engine has been designated as a contingency engine for the UH-1H. The T53-L-13B has been out of production for several years and spares are in short supply. A preliminary airworthiness evaluation (USAAEFA Project No. 84-25) of this configuration is in progress. The test aircraft configuration and known alternative configurations are listed in table B-1. Design data, data derived from design data and flight limitations applicable to these tests are tabulated in tables B-2, B-3 and B-4, respectively.

Table B-1. UH-1H Configuration Variations

Item	Test Aircraft Configuration	Alternative Configuration
Pitot-Static System	Roof mounted probe	Nose mounted pitot probe S/N 65-12895 and previous
Main rotor blades	Metal	Composite
	Constant airfoil (0012), Chord and twist	varying airfoil, chord and twist in development
Main rotor hub	Free teetering (+11 degrees)	Hub restraint spring in development
Main rotor mast	Thick walled	Thin walled
Tail rotor	Model 801 pusher	Model 212 tractor
	8.41 inch chord	11.5 inch chord
	Forward blade down rotation	Forward blade up rotation on HH-1H
Engine	T53-L-13B and	Standard
	T53-L-703	Contingency
Inlet External	Barrier filter	See reference 15 for
Engine	Bleed air scavenged particle separator	alternatives
Exhaust	Straight tail pipe	a) upturned (toilet bowl)
		b) muff heater
		c) IR suppressor(s)
		d) smoke generator
Drive shaft	Bell 205 short shaft (L-13 tests)	Either
	K-flex (703 tests)	
Fuel system	Crash worthy	Non-crash worthy
		Internal auxillary
		External auxillary
Wire strike protection system	Not installed	Installed
Cargo hook	Not installed	Installed
Cargo mirror	Not installed	Installed
Rescue hoist	Not installed	Installed
Paint: fuselage	Gloss enamel red on white	Flat black on olive drab
		Black on olive IR suppressive
Paint: rotors	Flat black with white zone markers	Flat black
		IR suppressive
		Black & white hi-visibility
IR jammer	Not installed	Installed
Radar detector	Not installed	Installed
External stores	None	Various armament
		Auxillary fuel
		Dispensers
Antennas	Standard production Nav-Com	Standard plus
	FM homing roof mounted	H F comm on tail boom
		Global positioning
		Various mission antennas

Overall Dimensions	
Length (rotor turning)	57 ft, 1.1 in.
Length (nose to tail)	41 ft, 11.1 in.
Width of skids (max width except rotor)	9 ft, 6.6 in.
Height (to top of turning tail rotor)	14 ft, 5.5 in.
Height (to top of rotor mast)	14 ft, 0.7 in.
Fuselage ground clearance (design weight)	1 ft, 3.0 in.
Main rotor clearance (rotor tip to tail boom, static)	1 ft, 10.7 in.
Weights	
Empty weight (typical fleet aircraft)	5350 lb
Design gross weight	6600 lb
Maximum gross weight	9500 lb
Allowable test weight (ref 14)	10,000 lb
Main rotor	
Type	Teetering
Rotation direction	Forward blade left
Number of blades	2
Rotor diameter (blades)	48 ft
Rotor diameter (including tracking tips)	48 ft, 3.2 in.
Blade length	22 ft
Blade chord	21 in.
Blade twist (hub center to tip)	-10 deg
Blade airfoil	NACA 0012
Preconing angle	2.75 deg
Hub diameter	5 ft, 4 in.
Mast angle (from vertical ref)	5 deg forward tilt
Control travel: (measured at center of grip)	
Collective	10.75 in. (27 deg)
Longitudinal cyclic	12.2 in. (30 deg)
Lateral cyclic	12.3 in. (30 deg)
Blade travel:	
Flapping (any direction)	±11 deg
Collective (measured at 75% radius)	0 to 15 deg
Longitudinal cyclic	±12 deg
Lateral cyclic	±10 deg
Tail Rotor	
Type	Pusher
Rotation direction	Forward blade down
Number of blades	2
Rotor diameter	8 ft, 6 in.
Blade chord - constant	8.41 in.
Blade twist	0 deg
Blade airfoil - constant	NACA 0015
Pedal travel	6.8 in.
Blade travel:	
Flapping	±7.5 deg
Pitch thrust to right (left yaw)	-19 deg
Pitch thrust to left (right yaw)	+7 deg
Sychronized Elevator	
Span	9.5 ft
Chord	30.6 in.
Area	19.8 ft^2
Airfoil type	Inverted 11% Clark Y

Table B-3. Derived Data

Main Rotor	
Disc area (total swept area)	1809.56 ft^2
Blade area (including hub)	84 ft^2
Solidity	0.0464202
Hub swept area	22.34 ft^2
Disc loading:	
6600 lb	3.65 lb/ft^2
9500 lb	5.25 lb/ft^2
Blade loading:	
6600 lb	78.6 lb/ft^2
9500 lb	113.1 lb/ft^2
Power loading (1137 shp)	
6600 lb	5.80 lb/shp
9500 lb	8.36 lb/shp
Tip speed in a hover:	
324 rotor rpm (maximum)	814 fps (482 kt)
294 rotor rpm (minimum)	739 fps (438 kt)
Maximum tip speed in forward flight: (V_T = 123.6 kt)	
Power on (324 rotor rpm)	1023 fps (606 kt)
Power off (339 rotor rpm)	1061 fps (628 kt)
Tail Rotor	
Disk area (total swept area)	56.75 ft^2
Blade area (including hub)	5.96 ft^2
Solidity	0.104980
Tip speed in a hover:	
324 rotor rpm	736 fps (436 kt)
294 rotor rpm	668 fps (395 kt)

Gear Ratios	Ratio	Teeth
Power turbine to output shaft	3.210526:1	$\frac{61}{38} \times \frac{54}{27}$
Output shaft to main rotor	20.38306:1	$\frac{62}{29} \times \left(\frac{57+119}{57}\right)^2$
Output shaft to tail rotor	3.990229:1	$\frac{62}{29} \times \frac{41}{55} \times \frac{26}{27} \times \frac{39}{15}$
Tail rotor to main rotor	5.108243:1	$\frac{15}{39} \times \frac{27}{26} \times \frac{55}{41} \times \left(\frac{57+119}{57}\right)^2$
Gas producer turbine to tach (100%, 4200 Tach RPM = 25,147 RPM)	5.987395:1	$\frac{63}{34} \times \frac{40}{21} \times \frac{30}{24} \times \frac{38}{28}$
Output shaft to tach pad	1.562568:1	$\frac{27}{54} \times \frac{38}{61} \times \frac{43}{30} \times \frac{50}{15} \times \frac{21}{20}$
Tach pad to main rotor	13.28143:1	$\frac{27}{26} \times \frac{55}{41} \times \left(\frac{57+119}{57}\right)^2$

Table B-4. Flight Limitations

Engine and Drive Train	
Power ratings:	
Military power (30-minute limit)	1400 shp (T53-L-13B) 1800 shp (T53-L-703)
Maximum drive train rating	1100 shp
Torque pressure limits:	
Maximum continuous	50 psi
Transient overtorque	50 to 54 psi
Transient overtorque (inspect drive train)	54 to 61 psi
Transient overtorque (replace drive train and rotor)	Over 61 psi
Output shaft speed:	
Maximum steady state	6600 rpm
Minimum steady state	6400 rpm
Minimum steady state below 7500 lb	6000 rpm
Maximum transient (below 91% N_1)	6750 rpm
Exhaust Gas Temperature (T53-L-13B)	
Continuous	400°C to 610°C
30-min limit	610°C to 625°C
starting and acceleration (10 sec)	625°C to 675°C
Maximum for starting and acceleration	760°C
Turbine Gas Temperature (T53-L-703)	
Continuous	400°C to 820°C
30 minute limit	820°C to 880°C
Starting and acceleration (5 sec)	880°C to 950°C
Gas Producer	
Maximum speed - T53-L-13B	25,600 rpm (101.5%)
Maximum speed - T53-L-703	26,650 rpm (106.0%)
Rotor Speed	
Maximum power on	324 rpm
Power on transient	331 rpm
Power off	339 rpm
Minimum power on	314 rpm
Power on less than 7500 lb	294 rpm
Power off	294 rpm
Airframe	
Loading: (see ref 11 for center of gravity envelope)	
Maximum overload weight	9500 lb
Maximum floor loading	100 lb/ft^2
Maximum cargo hook capacity	4000 lb
Maximum forward cg	Sta 130
Maximum aft cg	Sta 144
Maximum lateral cg	±5 in.
Limit load factors:	
Design positive 6600 lb	+3.0 g
9500 lb	+2.1 g
Minimum for flight	+0.5 g
Airspeed: (see ref 11, for complete airspeed envelope)	
Forward flight maximum	123.6 KTAS at 2000 ft
Sideward and rearward flight maximum	30 kt

APPENDIX C. TEST INSTRUMENTATION

1. All instrumentation was installed, calibrated and maintained by US Army Aviation Engineering Flight Activity (USAAEFA) except for strain gages. The main rotor blade, hub, and mast and tail rotor torque strain gages were installed and calibrated under contract by Bell Helicopter, Textron. The main rotor blade instrumentation consisted of five strain gage arrays at each of five radial stations; one gage at the leading edge, two gages (top and bottom) near the 1/4 chord point and two gages (top and bottom) near the trailing edge. The gage array signals were resolved, calibrated and output as two parameters, beam (flapwise) bending and chord (edgewise) bending for each radial station. All instrumentation including sensors, indicators, signal conditioning, pulse code modulation (PCM) encoder, recorder, telemetry and all mounting hardware weighed approximately 900 pounds. PCM data were recorded on a wide-band analog tape recorder aboard the aircraft. A 12-bit encoder formatted with 34 main frame and eight deep sub-frame columns operated at 192 kilo-bits per-second (KBPS) rate yielded a main frame rate (MFR) of 470.58 samples per second per word, which was recorded on one of 14 tape tracks at 15 inches-per-second (IPS). For the mission test flights data rate was reduced to 50.4 KBPS, for a main frame rate of 125 samples per second per word, recorded at 3-3/4 IPS to conserve tape. An intervalometer was used during the mission test flights to take 30 second long records, at five minute intervals during cruise and at one minute intervals during other flight phases.

RECORDED PARAMETERS

2. Calibration and dynamic characteristics of the recorded parameters are listed in table C-1. Resolution is the "engineering value" change per PCM count. For some parameters multiple channels were used to improve the dynamic range. A "residual" is the maximum engineering unit deviation of the calibration data from the calibration curve fit and gives an indication of the remaining systematic error due to curve fitting. Those parameters labeled "S", indicate a voltage substitution calibration. The "response" gives 3 db filter cutoff frequencies in hertz where applicable. In addition to PCM recording, two parameters (pitch link load #2 and chord bending station 192) were recorded in parallel on separate tape tracks using frequency modulation (FM) to aid in reconstruction and analysis of the waveform derived from the PCM data.

Table C-1. Recorded Parameter Characteristics

PARAMETER	CALIBRATION RANGE	UNITS	RESOLUTION	RESIDUAL[1]	SAMPLE RATE[2]	RESPONSE[3]
Time of Day	0 to 23:59:59.999	hr:min:sec	0.001 Sec	N/A	470.58	N/A
Fuel Used (volume)	0 to 999.9	gallons	0.1	0.05	58.82	.002 Sec TC
Fuel Temperature (at flowmeter)	-40 to +40	deg. C	0.09	0.044	58.82	2. Sec TC
Static Air Pressure (test boom)	0 to 31.	in.hg	7.63 E-5	0.001	58.82	10 Ft
Dynamic Air Pressure (test boom)	0 to 0.7	in.hg	0.00922	0.0009	58.82	5 Fc
Total Air Temperature	-40 to +50	deg. C	0.0894	0.0711S	58.82	5. Sec TC
Dew Point Temperature	-40 to +40	deg. C	0.08	0.092 S	58.82	2°/sec
Radar Altitude	0 to 1570	feet	0.712	0.35 S	117.65	5 Ft
Acceleration CG Longitudinal	-1 to +1	std g	0.00104	3 point	117.65	20 Fc
Acceleration CG Lateral	-1 to +1	std g	0.000984	3 point	117.65	20 Fc
Acceleration CG Normal	0 to +2.5	std g	0.00192	0.00574	117.65	20 Fc
Rotor Speed	0 to 600	RPM	0.2	0.1	117.65	35 Ft
Engine Drive Speed	0 to 12,000	RPM	4.6	2.3	117.65	35 Ft
Engine Torque Pressure	0 to 60	PSID	0.091	0.381	117.65	5 Fc
Main Rotor Torque	0 to 20,094	ft-lb	19.78	2 point	470.5b	40 Fc
Tail Rotor Torque	0 to 710	ft-lb	0.779	2 point	117.65	5 Fc
Fuel Flow Rate (volume)	30 to 100	gal/hr	0.092	0.150	58.82	5 Fc
Measured Gas Temperature	200 to 900	deg. C	1.22	0.954	58.82	400°/Sec
Compressor Discharge Pressure	10 to 120	PSIA	0.0874	0.251	117.65	5 Fc
Gas Generator Speed	0 to 200	percent	0.06	0.03	117.65	35 Ft
Longitudinal Cyclic Position (FFF)	0 to 12.5	inches	0.00173	0.0798	58.82	30 Ft
Lateral Cyclic Position (FFL)	0 to 12.5	inches	0.231	0.188	58.82	30 Ft
Pedal Position (FFL)	0 to 7.25	inches	0.0127	0.0638	58.82	30 Ft
Collective Position (FFD)	0 to 10.25	inches	0.0206	0.172	58.82	30 Ft
Engine Condition (twist grip)	0 to 100	percent	0.164	3 point	58.82	30 Ft
Left Swashplate Actuator	0 to 100	percent	0.0498	0.807	117.65	5 Fc
Right Swashplate Actuator	0 to 100	percent	0.0433	0.995	117.65	5 Fc
Collective Scissors Actuator	0 to 100	percent	0.0463	0.729	117.65	5 Fc
Stabilator Angle (Sync elevator)	-3 to +4	degrees	0.00296	0.234	58.82	5 Fc
Tail Rotor Collective Angle	-19 to +4.5	degrees	0.0107	0.405	58.82	5 Fc
Main Rotor Cyclic Blade Angle	-5 to +30	degrees	0.0111	0.?789	470.58	5 Fc
Main Rotor Teeter Angle	-12 to +12	degrees	0.0192	?.321	470.58	5 Fc
Angle of Attack (boom vane)	-50 to +50	degrees	0.176	0.279	58.82	30 Ft
Angle of Sideslip (boom vane)	-50 to +50	degrees	0.176	0.254	58.82	30 Ft
Pitch Attitude	-180 to +180	degrees	0.08789	0.045 S	58.82	10 Ft
Roll Attitude	-180 to +180	degrees	0.08789	0.045 S	58.82	10 Ft
Magnetic Heading	0 to 360	degrees	0.08789	0.045 S	58.82	10 Ft
Pitch Rate	-15 to +15	deg/sec	0.0588	0.185 S	117.65	10 Fc
Roll Rate	-60 to +60	deg/sec	0.196	0.159 S	58.82	10 Fc
Yaw Rate	-30 to +30	deg/sec	0.131	0.156 S	58.82	10 Fc
Rotor Azimuth Index (Blip)	Binary	degrees	3.8	3.8	470.58	0.002 Sec TC
Mast Bending Parallel	0 to 56,670	in-lb	18.515	2 point	470.58	40 Fc
Mast Bending Perpendicular	0 to 56,650	in-lb	24.799	2 point	.58	40 Fc
Pitch Link Axial Load #1	0 to 2400	pounds	0.0345	3 poin	.58	60 Fc
Pitch Link Axial Load #2	0 to 2400	pounds	0.0389	3 point	470.58 FM	5 Ft
Hub Beam Bending (sta 6.3)	0 to 111,500	in-lb	144.112	2 point	470.58	60 Fc, 5K
Blade Beam Bending sta 35	0 to 40,000	in-lb	32.0459	2 point	470.58	60 Fc, 5K
Blade Beam Bending sta 84	0 to 31,400	in-lb	18.884	2 point	470.58	60 Fc, 5K
Blade Beam Bending sta 150	0 to 19,860	in-lb	9.743	2 point	470.58	60 Fc, 5K
Blade Beam Bending sta 192	0 to 12,500	in-lb	8.088	2 point	470.58	60 Fc, 5K
Blade Beam Bending sta 234	0 to 5,162	in-lb	9.474	2 point	470.58 F	60 Fc, 5K
Hub Chord Bending (sta 6.3)	0 to 230,000	in-lb	202.299	2 point	470.58	60 Fc, 5K
Blade Chord Bending sta 35	0 to 81,000	in-lb	509.929	2 point	470.58	60 Fc, 5K
Blade Chord Bending sta 84	0 to 63,600	in-lb	184.008	2 point	470.58	60 Fc, 5K
Blade Chord Bending sta 150	0 to 40,200	in-lb	53.074	2 point	470.58	60 Fc, 5K
Blade Chord Bending sta 192	0 to 25,340	in-lb	46.833	2 point	470.58 FM	60 Fc, 5K
Blade Chord Bending sta 234	0 to 10,500	in-lb	107.358	2 point	470.58 F	60 Fc, 5K

NOTES:
[1]Residual: Maximum deviation of calibration data from calibration curve fit. N/A = Not applicable; 2 or 3 point = insufficient statistical data; S = voltage substitution.
[2]Sample rate for engineering tests; reduced by a ratio of 3.8:1 for mission tests. FM = Parameter recorded in parallel by frequency modulation; F = Failed early in project.
[3]Sec TC = Time constant (time to reach 63% of step input) Fc = unfiltered transducer response estimate, hz; Fc = 3db filter cutoff frequency, hz;/Sec = maximum slew rate, units/sec; 5K = 5Khz part of project.

SYSTEM CALIBRATIONS

3. In addition to transducer calibrations, the engine torquemeter calibrations were obtained from engine test cell calibrations conducted at Corpus Christi Army Depot, Texas. There was an apparent discrepancy in the T53-L-703 calibration which is discussed in appendix D. The torquemeter calibrations are shown in figures C-1 and C-2 for the two engines used. The test airspeed probes and production airspeed systems were calibrated for position error. Results are shown in figures C-3 through C-6. A fixed heated probe was used for the low temperature performance tests, which were run concurrently with an icing project (USAAEFA Project No. 83-23). Other flights used an unheated swiveling test probe. Position error was similar for both probes in zero sideslip level flight. Both test probes were mounted on the same boom and extended 92 inches forward from the nose of the aircraft.

COCKPIT INDICATORS

4. Both test and production indicators were used to establish and maintain desired test conditions. In some tests they were used to obtain data. Mission flight conditions were established solely by reference to standard production indicators without reference to their calibrations or the test indicators. Calibrations of some production indicators and indicating systems are shown in figures C-7 through C-15. Analysis of the impact of their errors on overall aircraft performance and operating characteristics are discussed in the Mission Flight Section of this report. The test and production indicators used for this test are listed below:

Sensitive Test Indicators	Calibrated Production Indicators
Record number	Airspeed (roof P-S probe)
Time of day	Altitude (roof P-S probe)
Airspeed (test boom)	Rotor speed
Pressure altitude (test boom)	Engine speed
Radar altitude	Engine torque pressure
Sideslip angle	Fuel quantity
Ambient air temperature	DC load meter (AMPS)
Dew point temperature	DC voltmeter
Fuel used (accumulator)	Magnetic heading
Rotor speed	Pitch and roll attitude
Engine torque pressure	Sideforce (slip ball)
Fuel flow rate	Distance measuring equipment

Gas generator speed
Measured gas temperature
Normal acceleration (G-meter)
Control positions
    Longitudinal cyclic
    Lateral cyclic
    Pedal
    Collective

EXTERNAL INSTRUMENTATION

5. Several items of external test instrumentation probably increased the fuselage parasite drag and rotor profile drag over that of an operational aircraft. These items included: test airspeed boom including swiveling pitot-static probe, YAPS head, and ram air temperature probe (photo C-1); dew point sensor (photo C-2); tail rotor slipring assembly (C-3); tail rotor collective blade pitch potentiometer and cover (photo C-4); main rotor blade strain gages and paint zone markings (photos C-5 and C-6); main rotor slipring assembly (photo C-7); and main rotor mast and hub instrumentation and wiring harnesses (photo C-8 through C-14). Drag for these items was not determined.

ELECTROMAGNETIC INTERFERENCE (EMI) CHECK

6. The airworthiness release (ref 14, app A) required an EMI check to determine the compatibility of the instrumentation system with aircraft navigation and communication systems. Operation of the instrumentation caused no detectable effect on the aircraft systems including the standby magnetic compass. Transmitting on the communication radios caused some problems with the instrumentation. The VHF-AM transmitter always caused some parameters to shift, usually 1% to 5% but sometimes full scale. The VHF-FM transmitter sometimes caused some parameters to shift. The UHF-AM transmitter occasionally caused shifts in the data. This problem generally required the test point to be repeated whenever radio transmission with air traffic control (ATC) or the chase aircraft could not be avoided during the 30 second data records. One other minor problem noted was a 400 hertz low amplitude (1-2%) signal superimposed on some of the strain gage loads, apparently caused by the main inverter. This signal was filtered out during data processing.

FIGURE C1

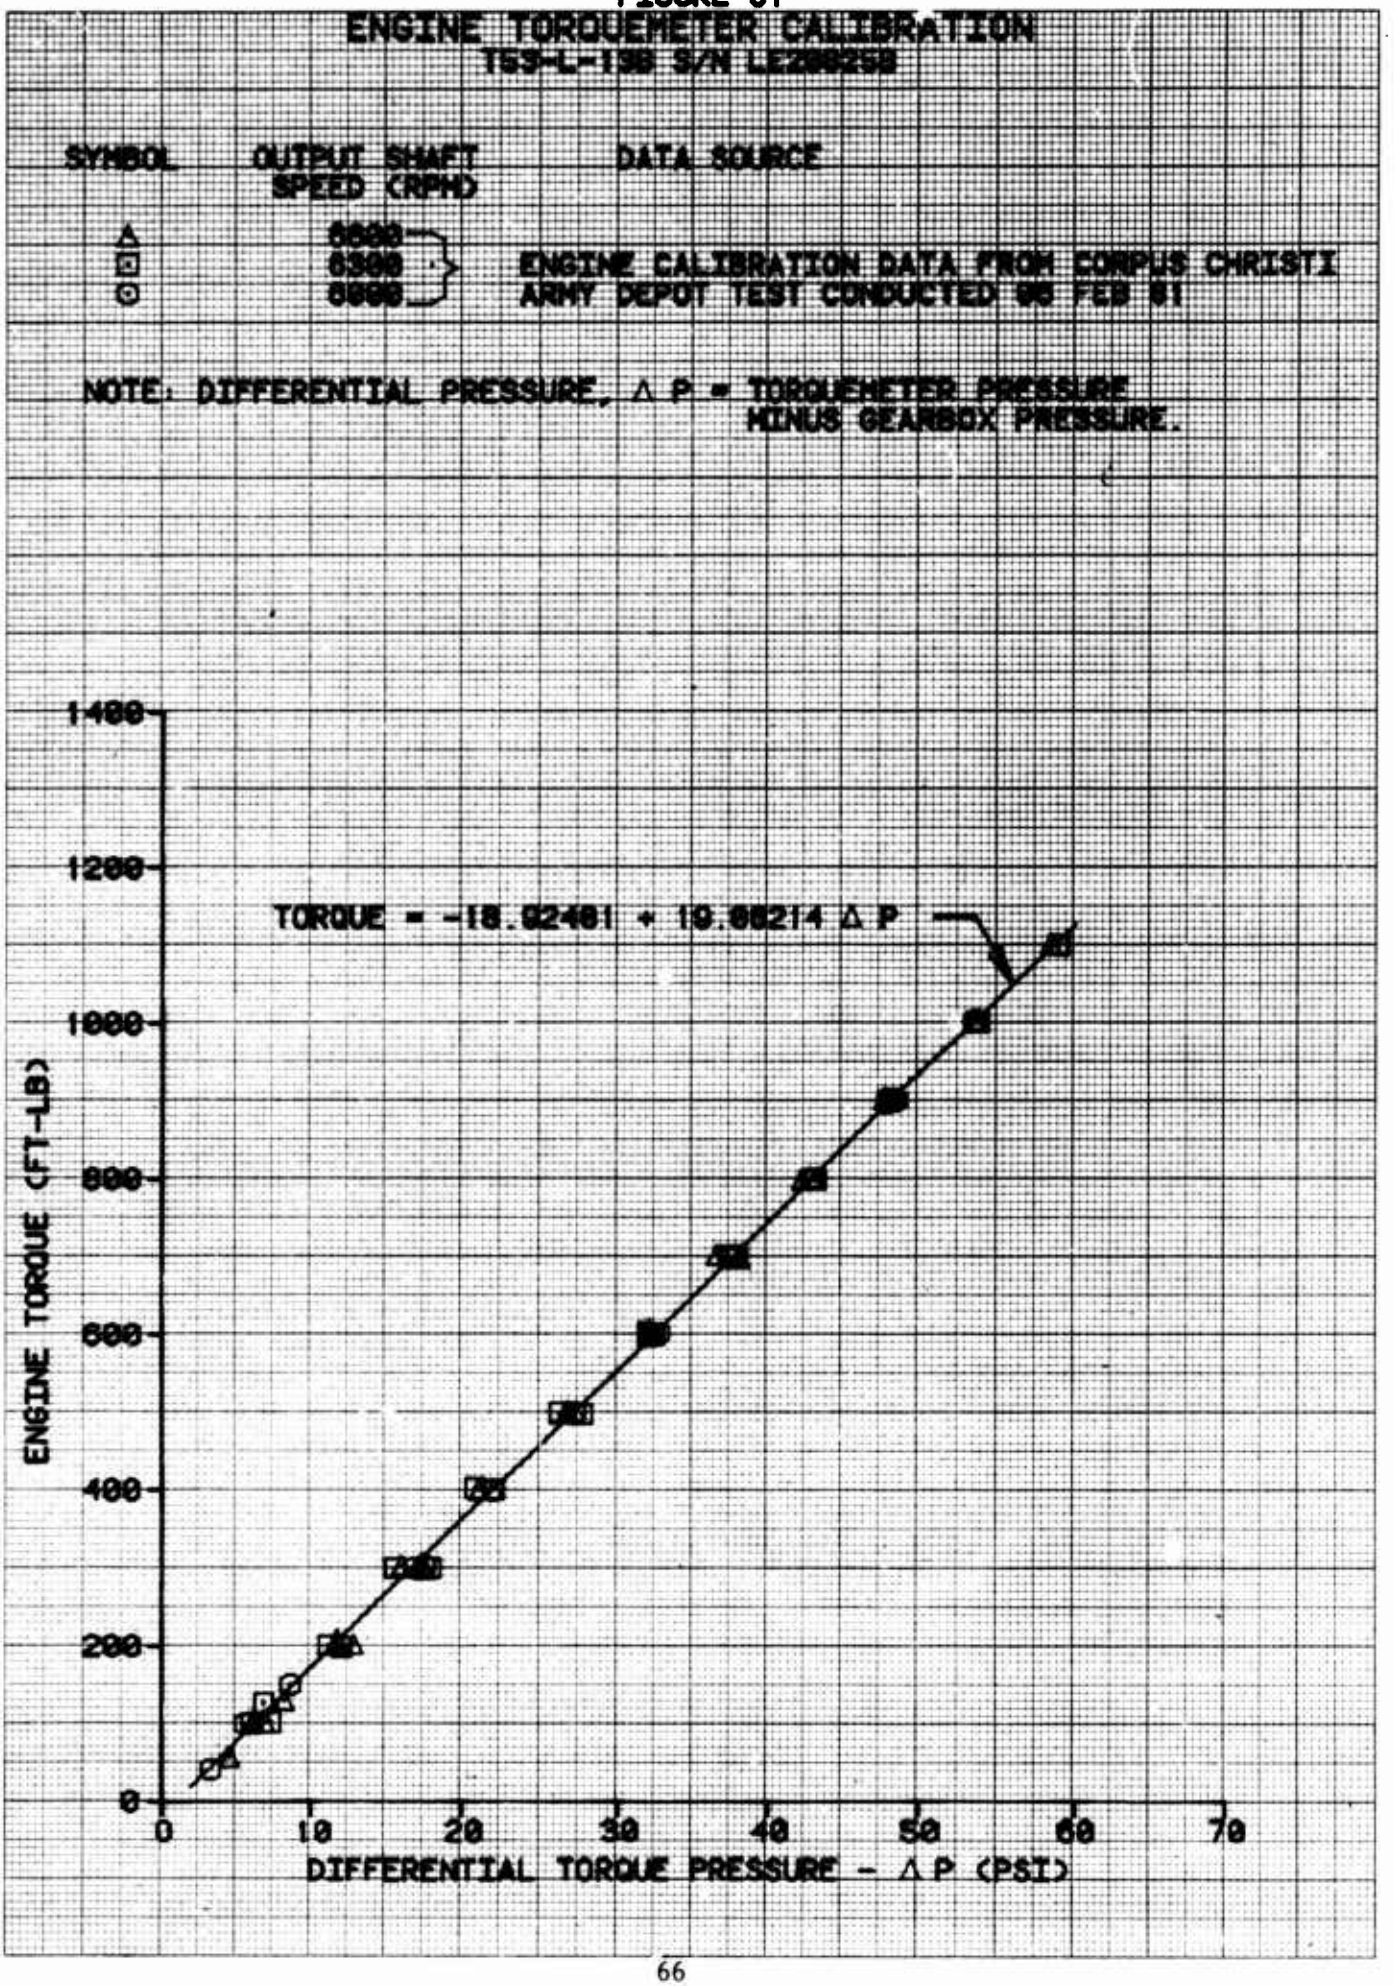

ENGINE TORQUEMETER CALIBRATION
T53-L-13B S/N LE28258
SYMBOL
OUTPUT SHAFT SPEED (RPM)
DATA SOURCE
6600
6300
6000
ENGINE CALIBRATION DATA FROM CORPUS CHRISTI ARMY DEPOT TEST CONDUCTED 06 FEB 81
NOTE: DIFFERENTIAL PRESSURE, Δ P = TORQUEMETER PRESSURE MINUS GEARBOX PRESSURE.
TORQUE = -18.02481 + 19.66214 Δ P
ENGINE TORQUE (FT-LB)
1400
1200
1000
800
600
400
200
0
0
10
20
30
40
50
60
70
DIFFERENTIAL TORQUE PRESSURE - Δ P (PSI)

FIGURE C2

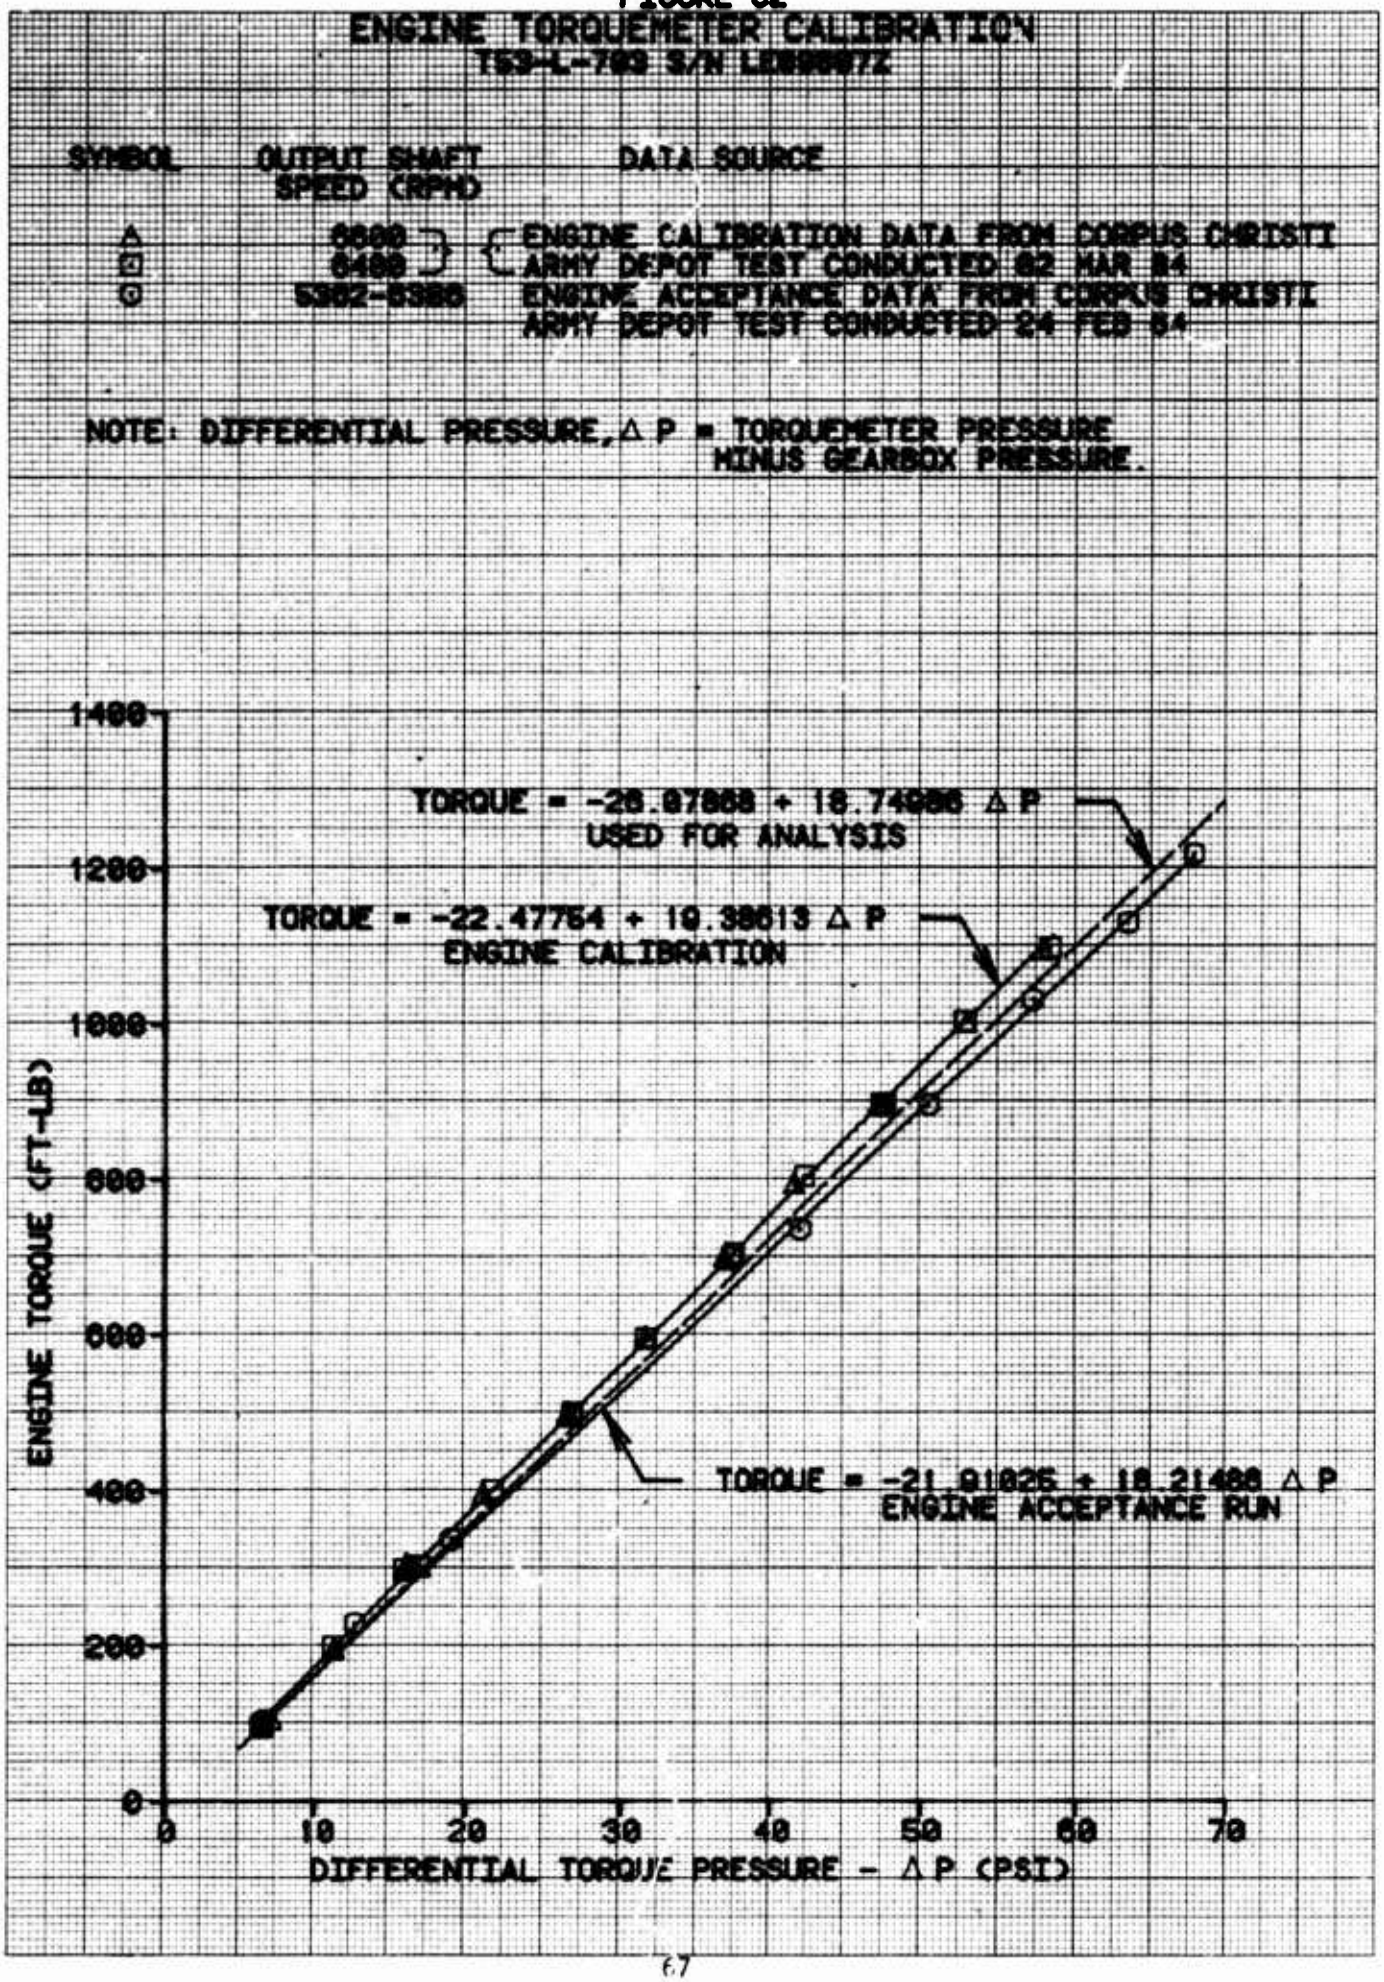

ENGINE TORQUEMETER CALIBRATION
T53-L-703 S/N LE
SYMBOL
OUTPUT SHAFT SPEED (RPM)
DATA SOURCE
6600
6400
ENGINE CALIBRATION DATA FROM CORPUS CHRISTI ARMY DEPOT TEST CONDUCTED 02 MAR 84
5302-6380
ENGINE ACCEPTANCE DATA FROM CORPUS CHRISTI ARMY DEPOT TEST CONDUCTED 24 FEB 84
NOTE: DIFFERENTIAL PRESSURE, Δ P = TORQUEMETER PRESSURE MINUS GEARBOX PRESSURE.
TORQUE = -26.07868 + 18.74986 Δ P
USED FOR ANALYSIS
TORQUE = -22.47764 + 19.38613 Δ P
ENGINE CALIBRATION
TORQUE = -21.91825 + 18.21488 Δ P
ENGINE ACCEPTANCE RUN
ENGINE TORQUE (FT-LB)
1400
1200
1000
800
600
400
200
0
0
10
20
30
40
50
60
70
DIFFERENTIAL TORQUE PRESSURE - Δ P (PSI)

FIGURE C3

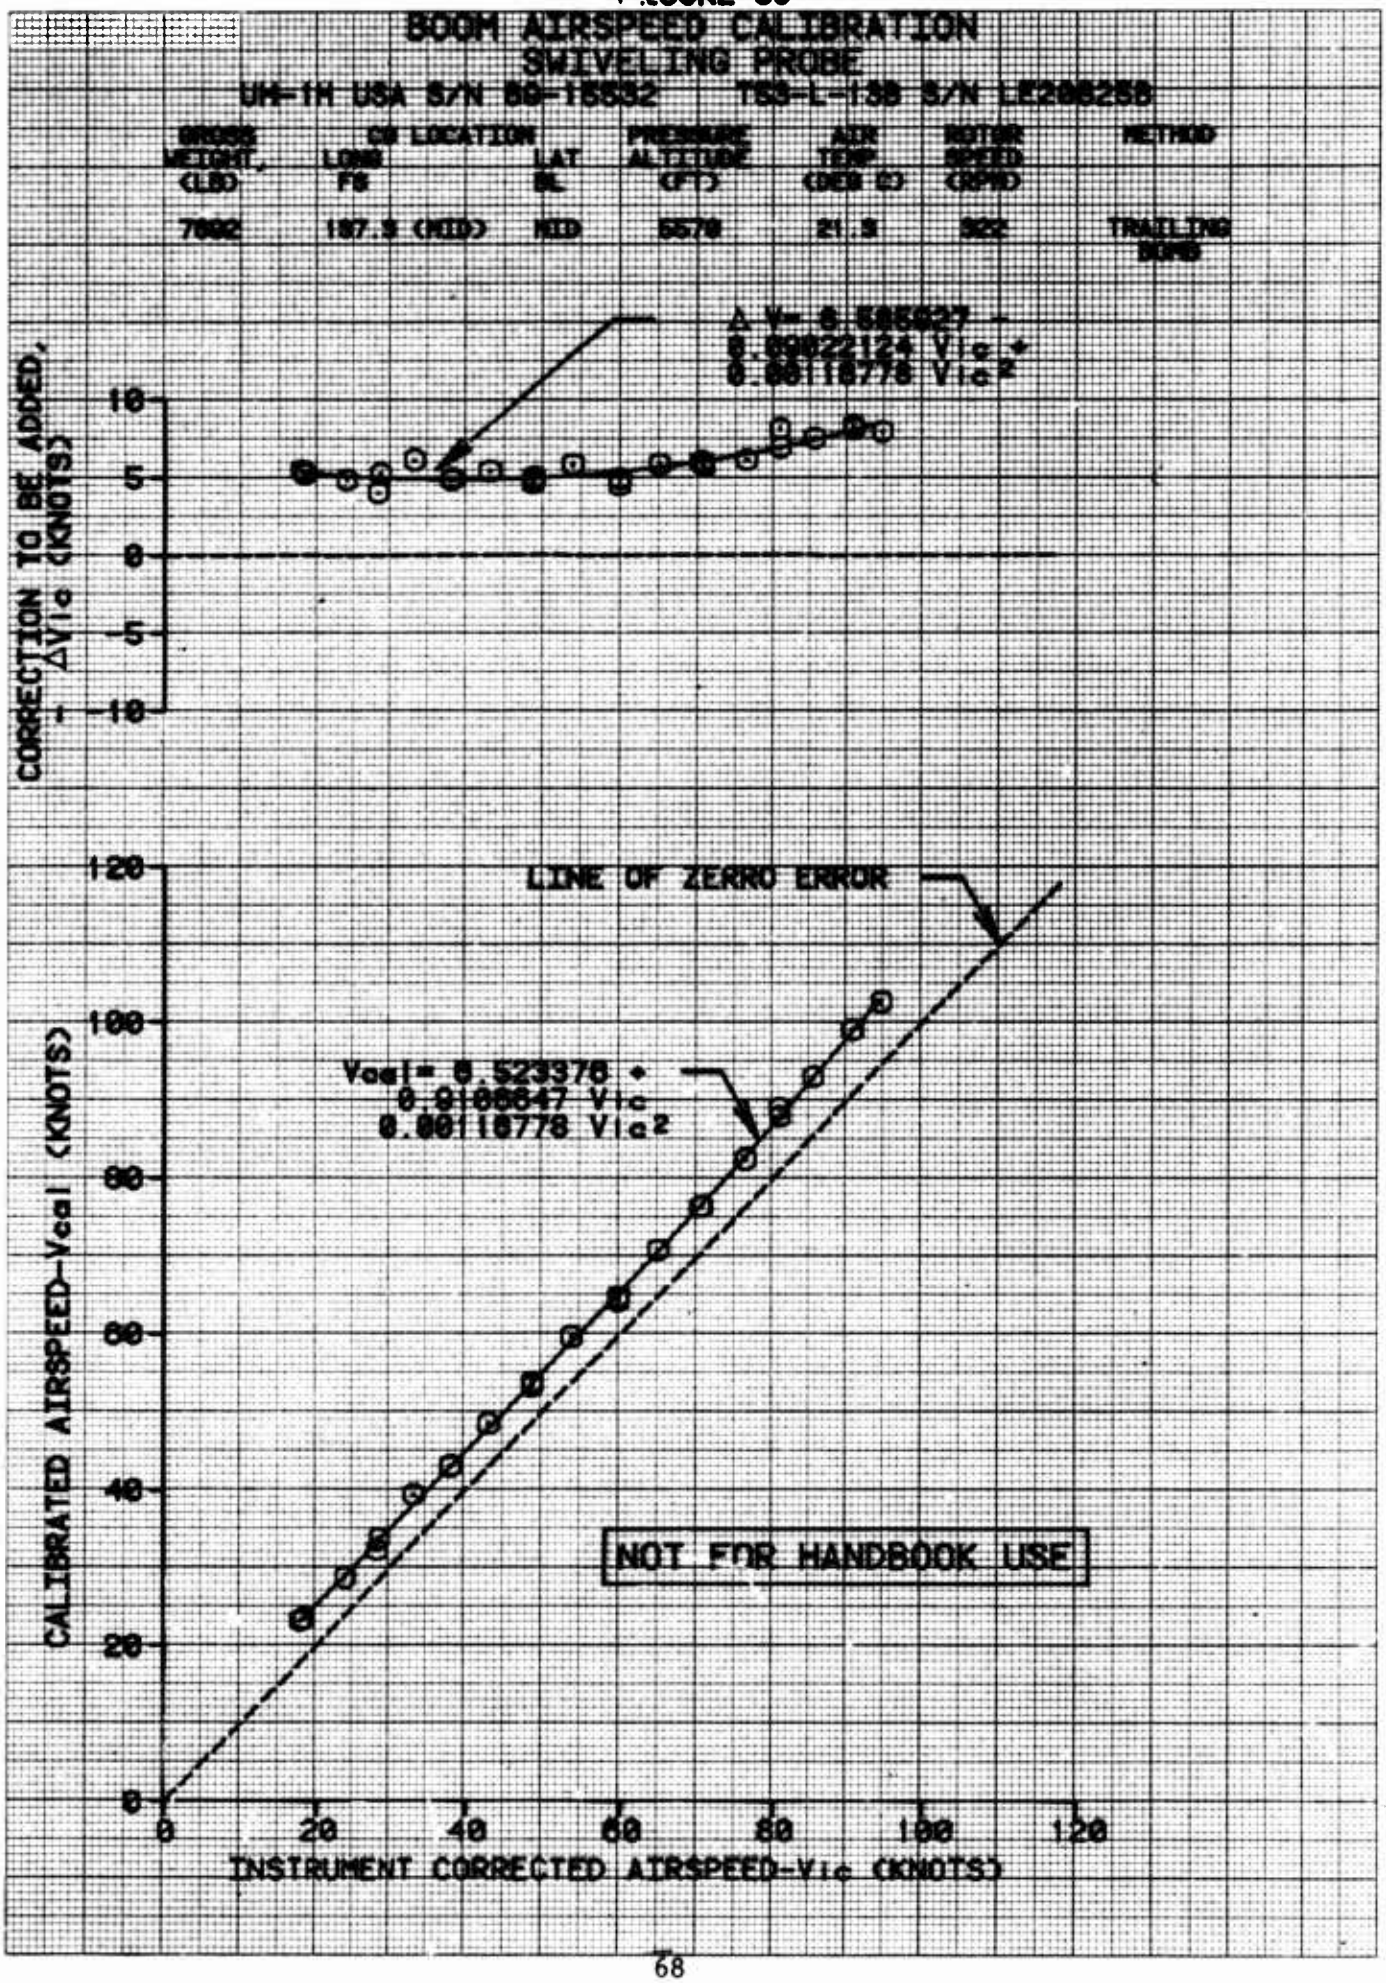

BOOM AIRSPEED CALIBRATION
SWIVELING PROBE
UH-1H USA S/N 66-15552 TSD-L-138 S/N LE206258
GROSS WEIGHT, (LBS) 7662
CG LOCATION LONG FS 187.3 (MID) LAT BL MID
PRESSURE ALTITUDE (FT) 5570
AIR TEMP (DEG C) 21.3
ROTOR SPEED (RPM) 322
METHOD TRAILING BOOM
ΔVc = 0.585627 + 0.0922124 Vic + 0.00116778 Vic²
CORRECTION TO BE ADDED, - ΔVic (KNOTS)
10
5
0
-5
-10
LINE OF ZERRO ERROR
Vcal = 0.523376 + 0.9188647 Vic 0.00116778 Vic²
CALIBRATED AIRSPEED-Vcal (KNOTS)
120
100
80
60
40
20
0
NOT FOR HANDBOOK USE
0
20
40
60
80
100
120
INSTRUMENT CORRECTED AIRSPEED-Vic (KNOTS)

FIGURE C4

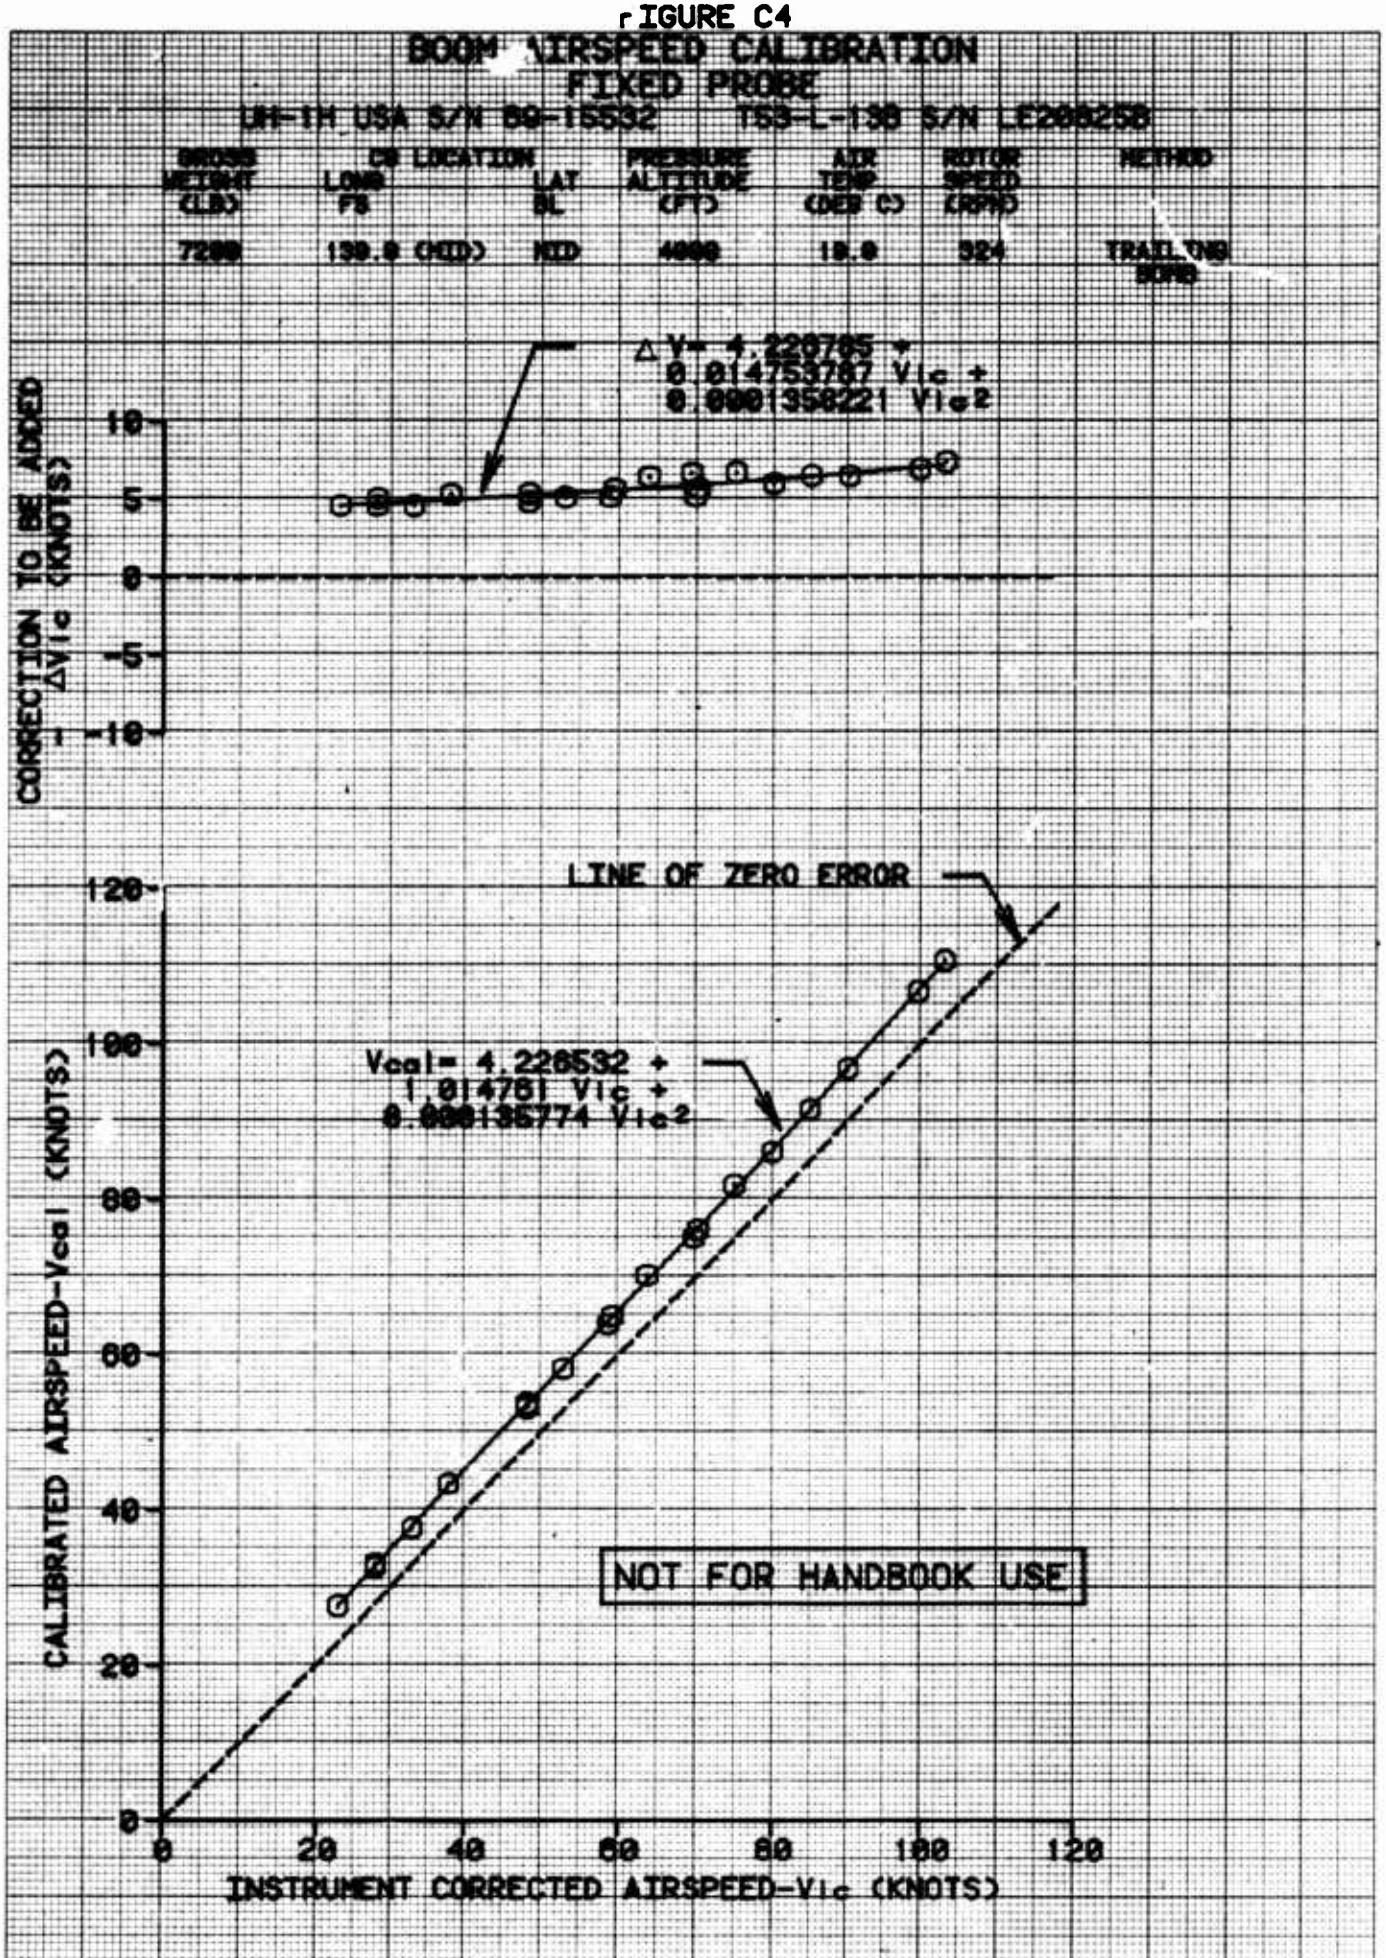

BOOM AIRSPEED CALIBRATION
FIXED PROBE
UH-1H USA S/N 69-15532 T53-L-13B S/N LE268258
GROSS WEIGHT (LB)
CG LOCATION LONG FS
LAT BL
PRESSURE ALTITUDE (FT)
ATK TEMP (DEG C)
ROTOR SPEED (RPM)
METHOD
7200
139.9 (AFT)
MID
4000
18.0
324
TRAILING BOOM
ΔVc = 4.228765 + 0.014753787 Vic + 0.0001358221 Vic²
CORRECTION TO BE ADDED ΔVic (KNOTS)
10
5
0
-5
-10
LINE OF ZERO ERROR
Vcal = 4.226532 + 1.014761 Vic + 0.0001356774 Vic²
CALIBRATED AIRSPEED-Vcal (KNOTS)
120
100
80
60
40
20
0
0
20
40
60
80
100
120
INSTRUMENT CORRECTED AIRSPEED-Vic (KNOTS)
NOT FOR HANDBOOK USE

FIGURE C5

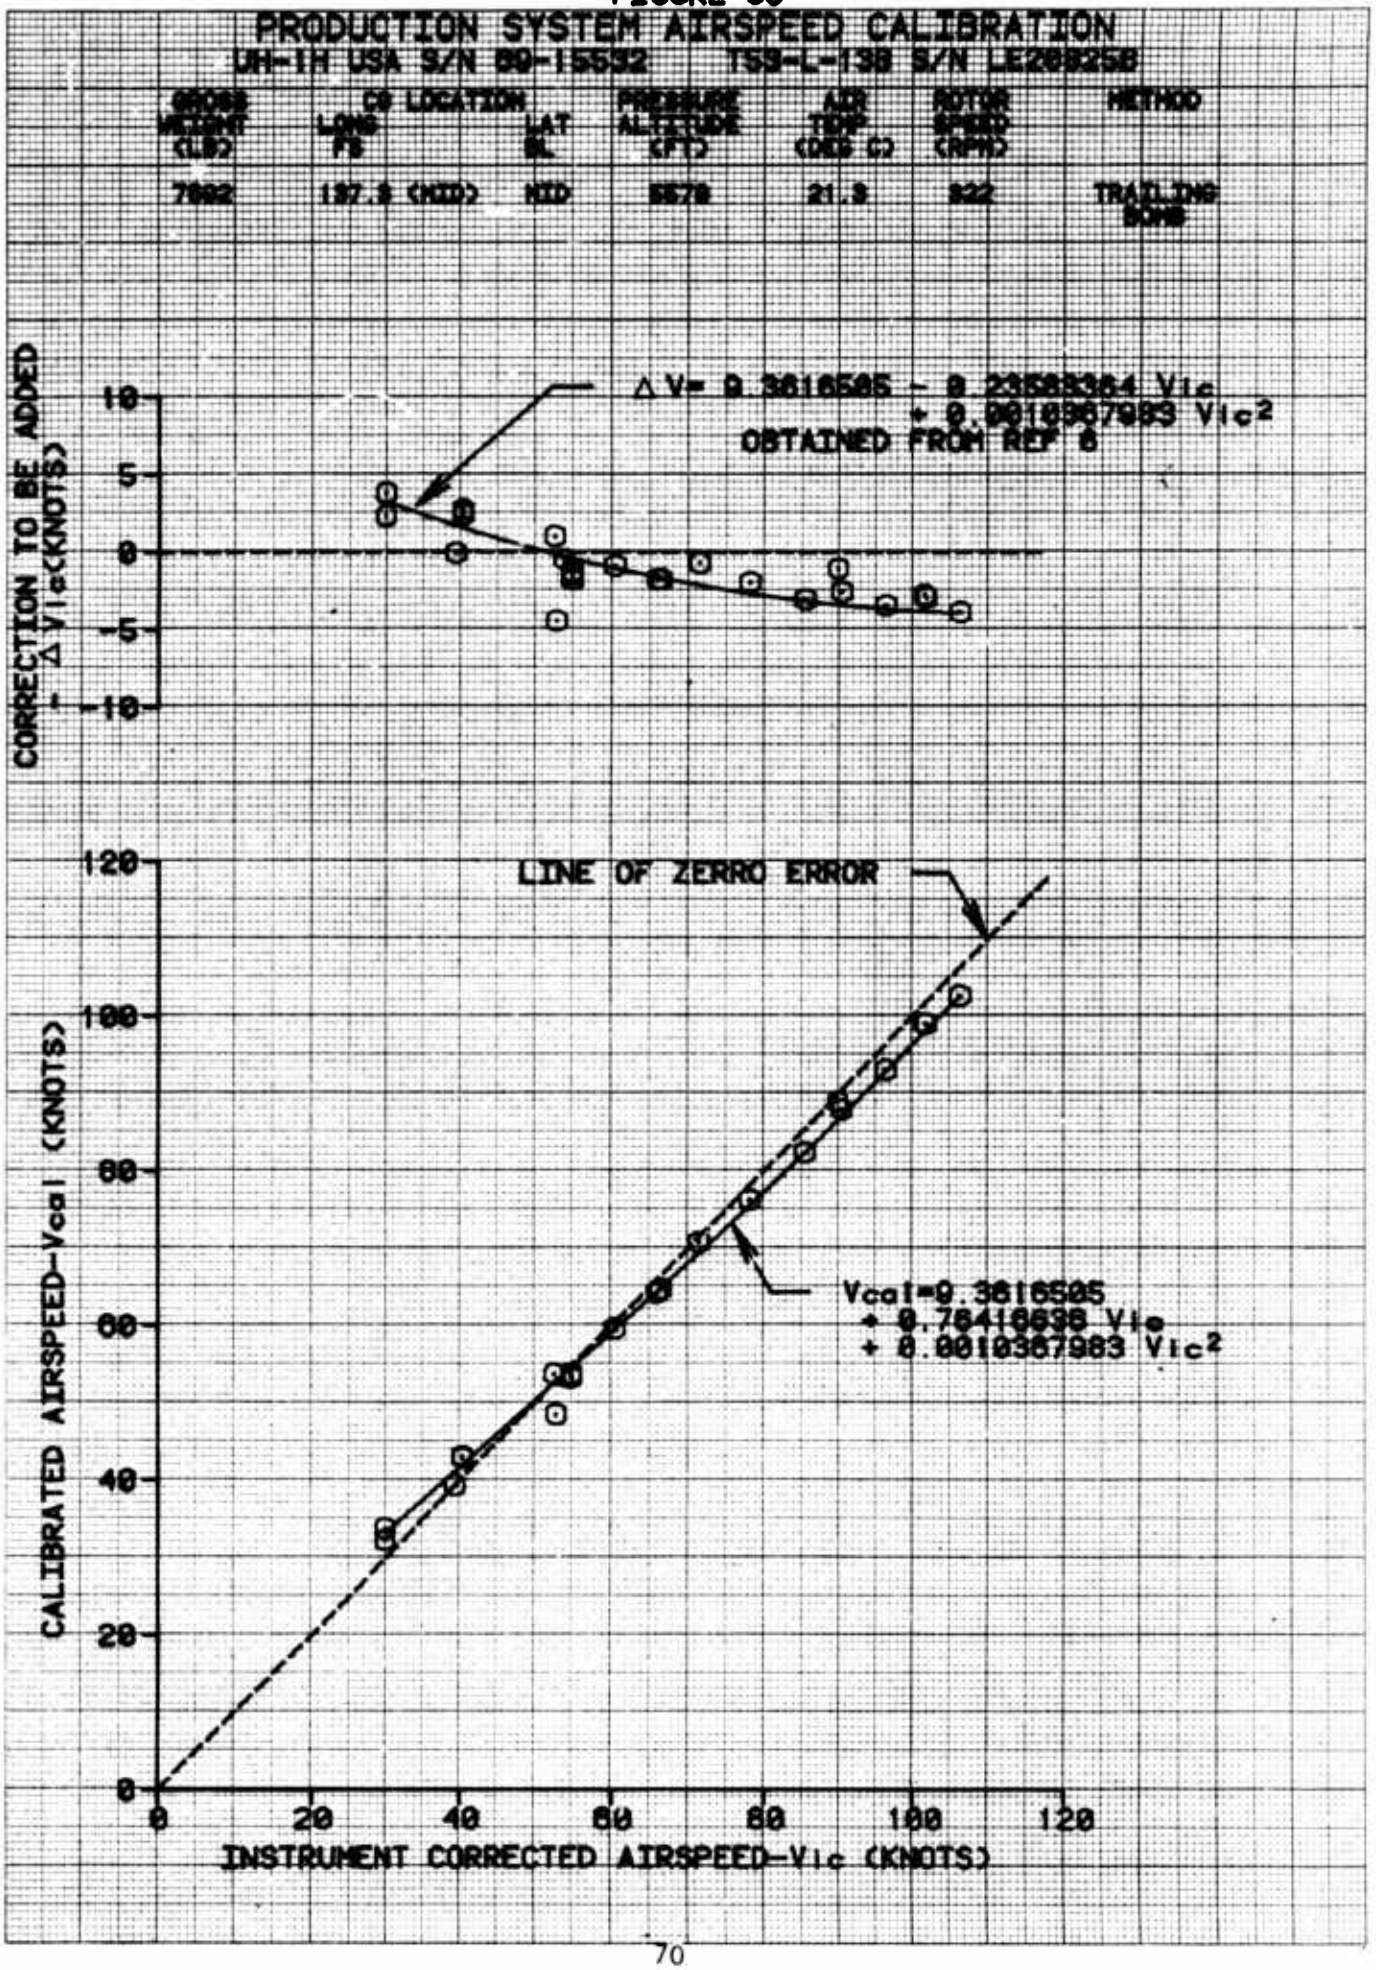

PRODUCTION SYSTEM AIRSPEED CALIBRATION
UH-1H USA S/N 69-15532 T53-L-13B S/N LE208258
GROSS WEIGHT (LB)
CG LOCATION LONG FS
LAT BL
PRESSURE ALTITUDE (FT)
AIR TEMP (DEG C)
ROTOR SPEED (RPM)
METHOD
7662
137.8 (MID)
MID
5878
21.9
322
TRAILING BOOM
ΔV= 0.3816505 - 0.23583364 Vic + 0.00103867983 Vic²
OBTAINED FROM REF 8
CORRECTION TO BE ADDED - ΔVic(KNOTS)
10
5
0
-5
-10
LINE OF ZERRO ERROR
Vcal=0.3816505 + 0.78416638 Vic + 0.00103867983 Vic²
CALIBRATED AIRSPEED-Vcal (KNOTS)
120
100
80
60
40
20
0
0
20
40
60
80
100
120
INSTRUMENT CORRECTED AIRSPEED-Vic (KNOTS)

FIGURE C6

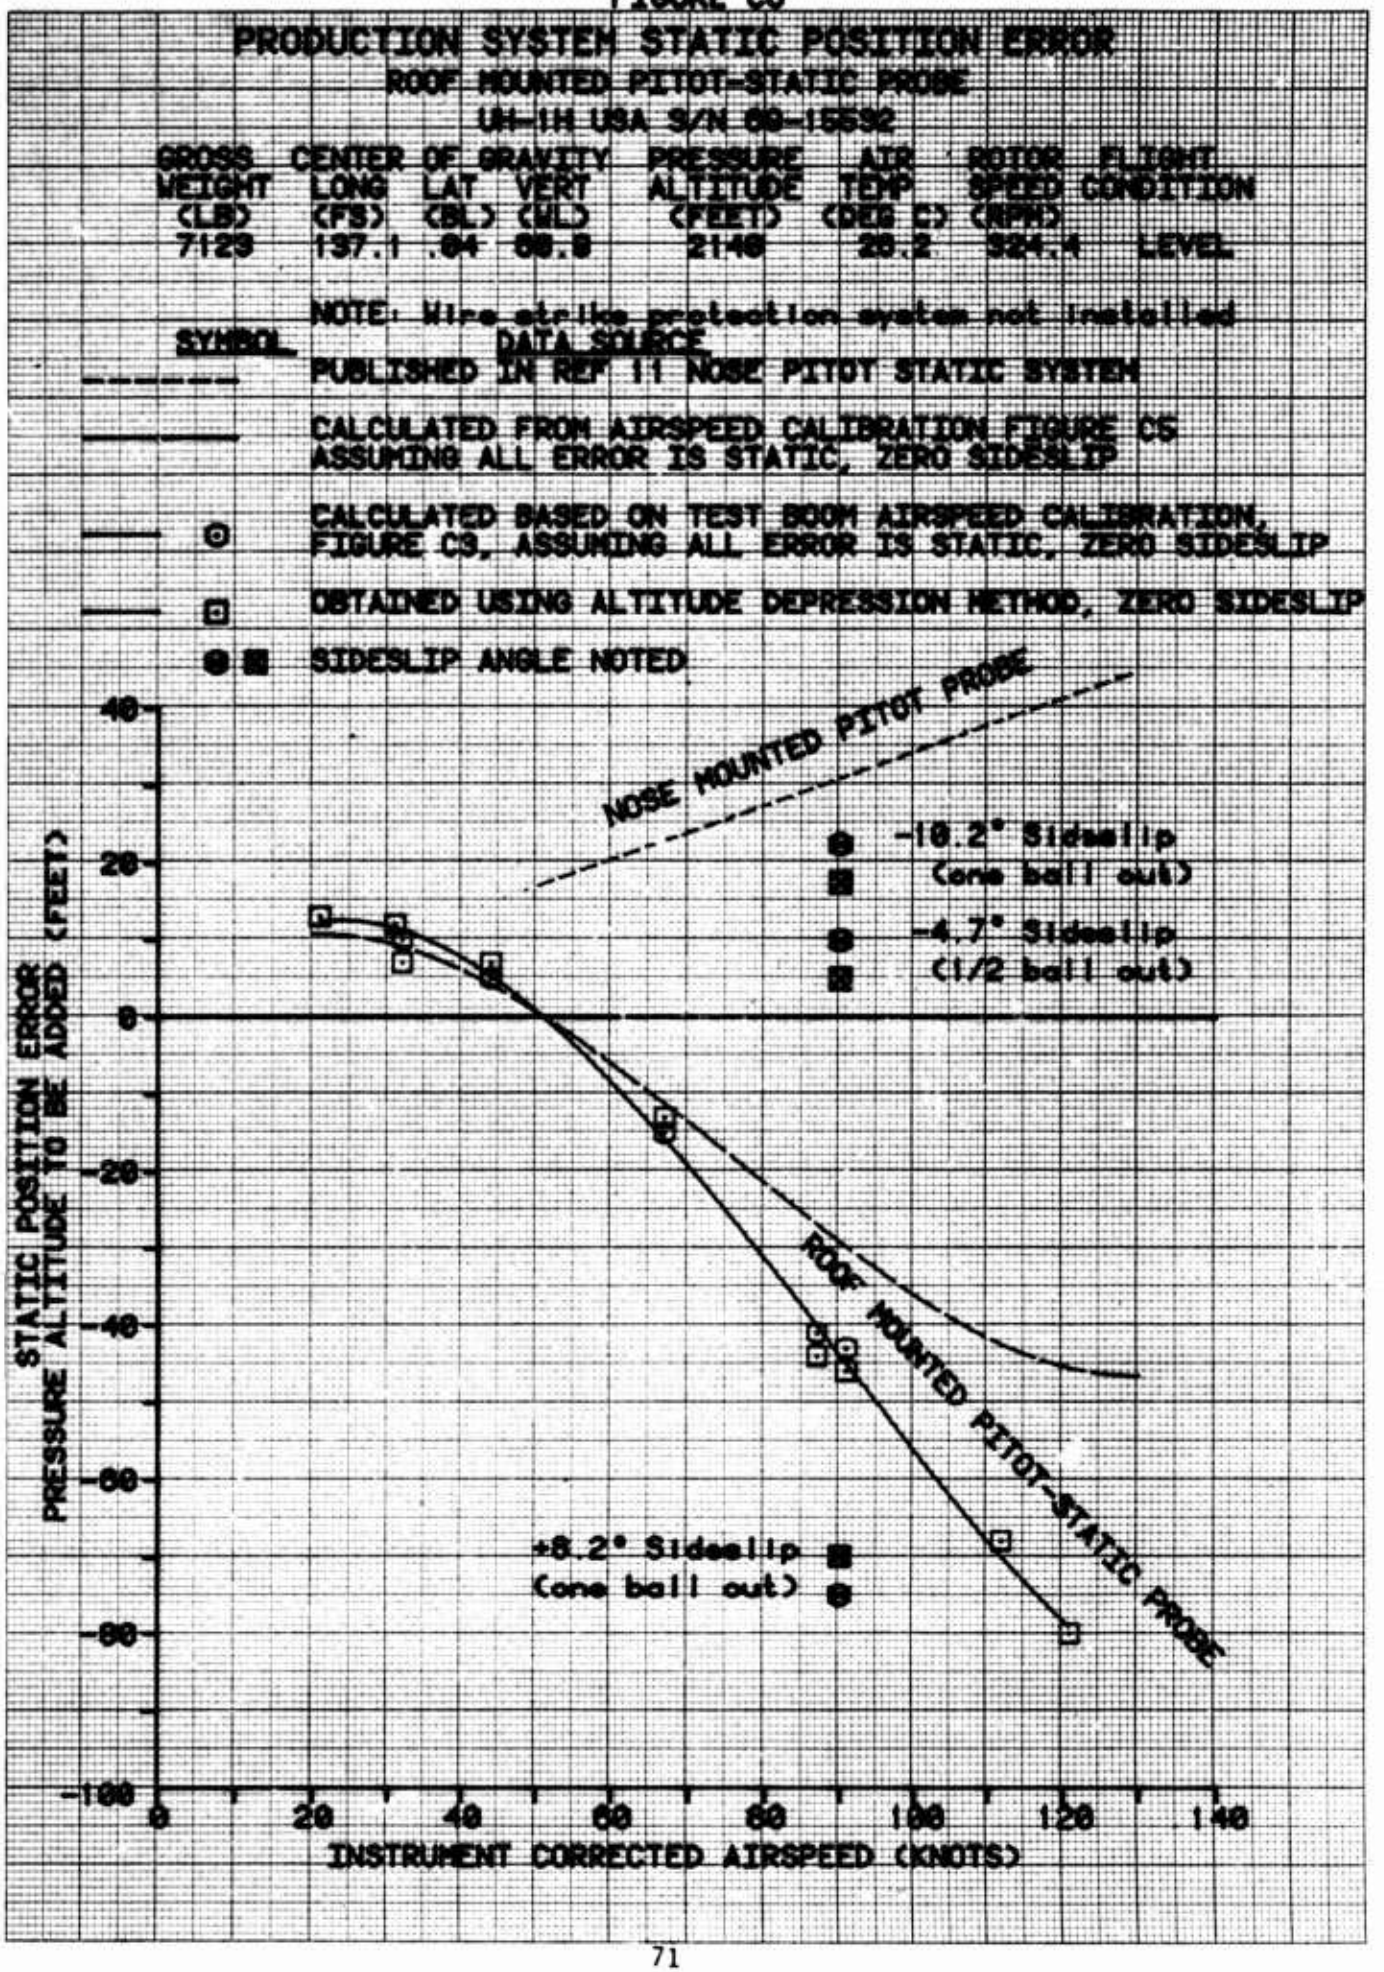
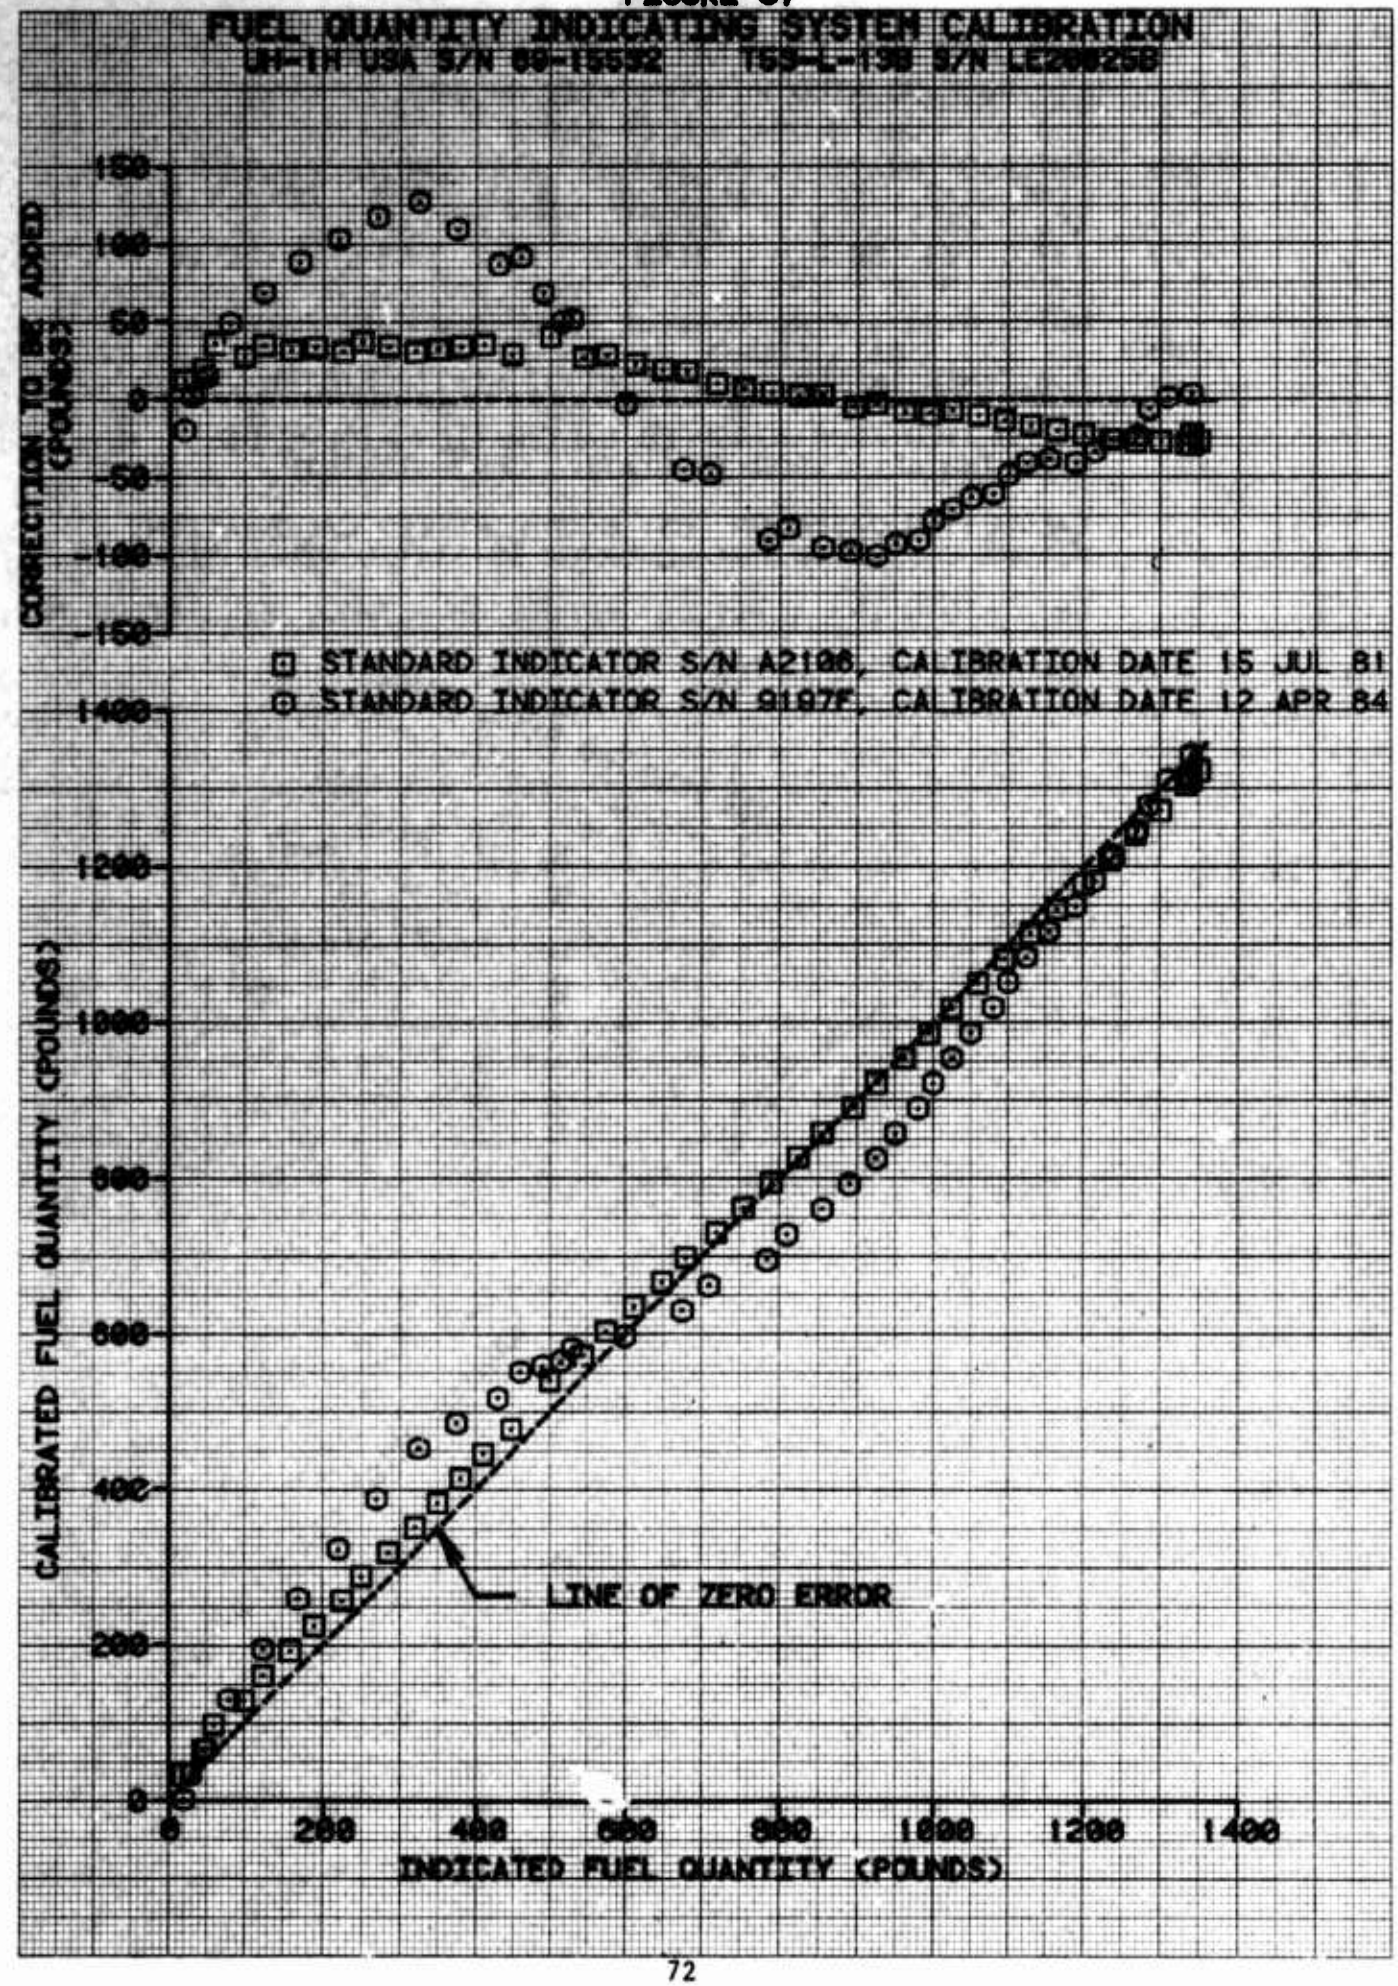

PRODUCTION SYSTEM STATIC POSITION ERROR
ROOF MOUNTED PITOT-STATIC PROBE
UH-1H USA S/N 66-16532
GROSS WEIGHT (LB) 7129
CENTER OF GRAVITY LONG (FS) 137.1 LAT (BL) .04 VERT (WL) 88.8
PRESSURE ALTITUDE (FEET) 2140
AIR TEMP (DEG C) 28.2
ROTOR SPEED (RPM) 324.4
FLIGHT CONDITION LEVEL
NOTE: Wire strike protection system not installed
SYMBOL DATA SOURCE
PUBLISHED IN REF 11 NOSE PITOT STATIC SYSTEM
CALCULATED FROM AIRSPEED CALIBRATION FIGURE C5 ASSUMING ALL ERROR IS STATIC, ZERO SIDESLIP
CALCULATED BASED ON TEST BOOM AIRSPEED CALIBRATION, FIGURE C3, ASSUMING ALL ERROR IS STATIC, ZERO SIDESLIP
OBTAINED USING ALTITUDE DEPRESSION METHOD, ZERO SIDESLIP
SIDESLIP ANGLE NOTED
NOSE MOUNTED PITOT PROBE
-10.2° Sideslip (one ball out)
-4.7° Sideslip (1/2 ball out)
ROOF MOUNTED PITOT-STATIC PROBE
+8.2° Sideslip (one ball out)
STATIC POSITION ERROR PRESSURE ALTITUDE TO BE ADDED (FEET)
40
20
0
-20
-40
-60
-80
-100
0
20
40
60
80
100
120
140
INSTRUMENT CORRECTED AIRSPEED (KNOTS)

FIGURE C7


FUEL QUANTITY INDICATING SYSTEM CALIBRATION
UH-1H USA S/N 66-15592 T53-L-13B S/N LE208258
CORRECTION (POUNDS ADDED)
CALIBRATED FUEL QUANTITY (POUNDS)
INDICATED FUEL QUANTITY (POUNDS)
STANDARD INDICATOR S/N A2106, CALIBRATION DATE 15 JUL 81
STANDARD INDICATOR S/N 9197F, CALIBRATION DATE 12 APR 84
LINE OF ZERO ERROR

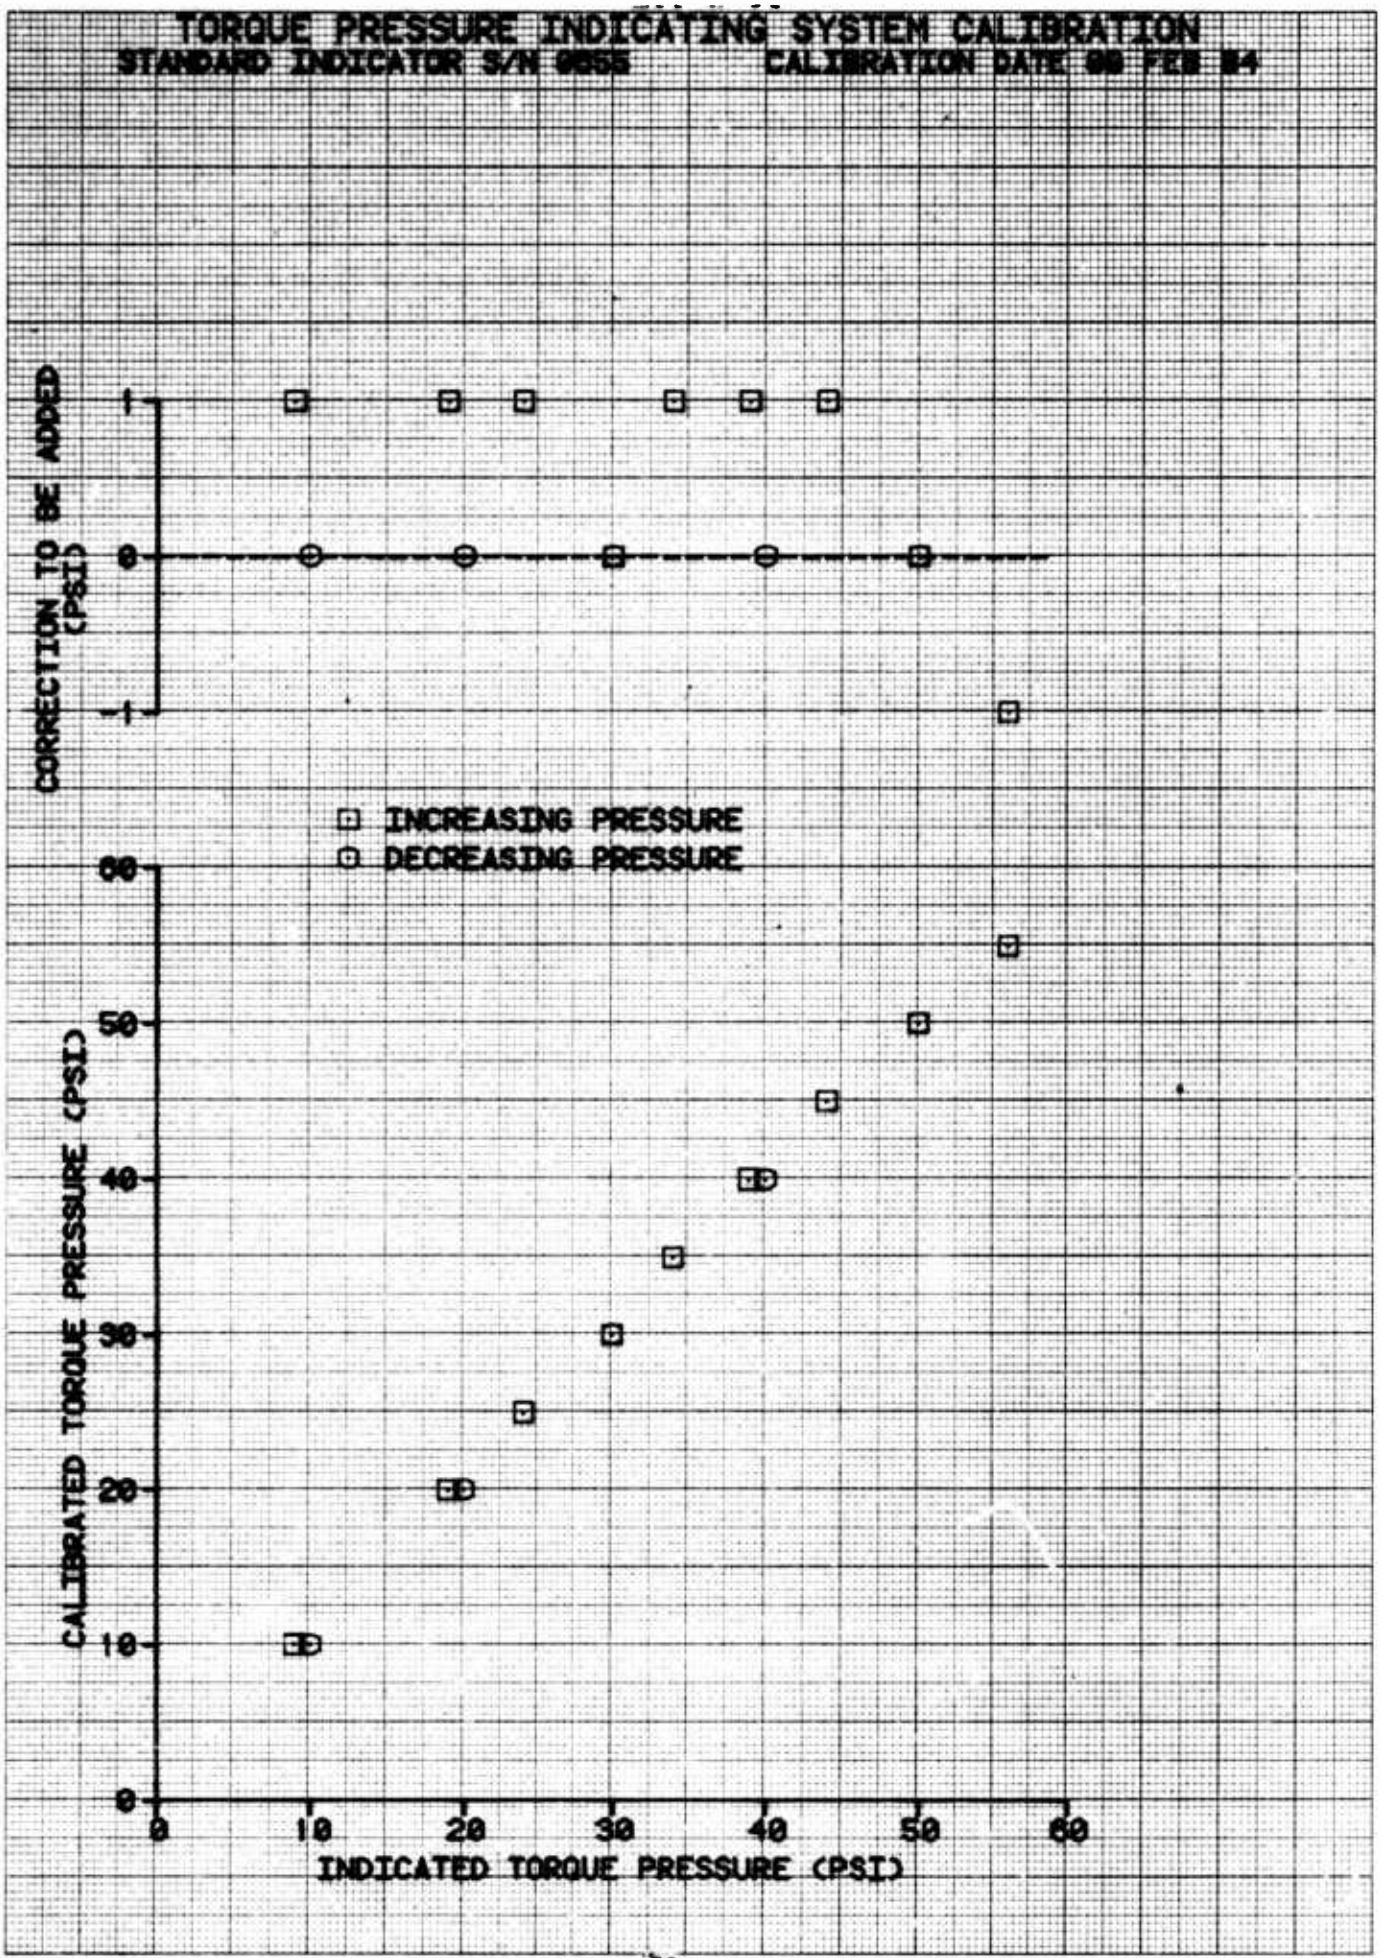

TORQUE PRESSURE INDICATING SYSTEM CALIBRATION
STANDARD INDICATOR S/N 9855
CALIBRATION DATE 08 FEB 84
CORRECTION TO BE ADDED (PSI)
1
0
-1
INCREASING PRESSURE
DECREASING PRESSURE
CALIBRATED TORQUE PRESSURE (PSI)
60
50
40
30
20
10
0
0
10
20
30
40
50
60
INDICATED TORQUE PRESSURE (PSI)

FIGURE C9

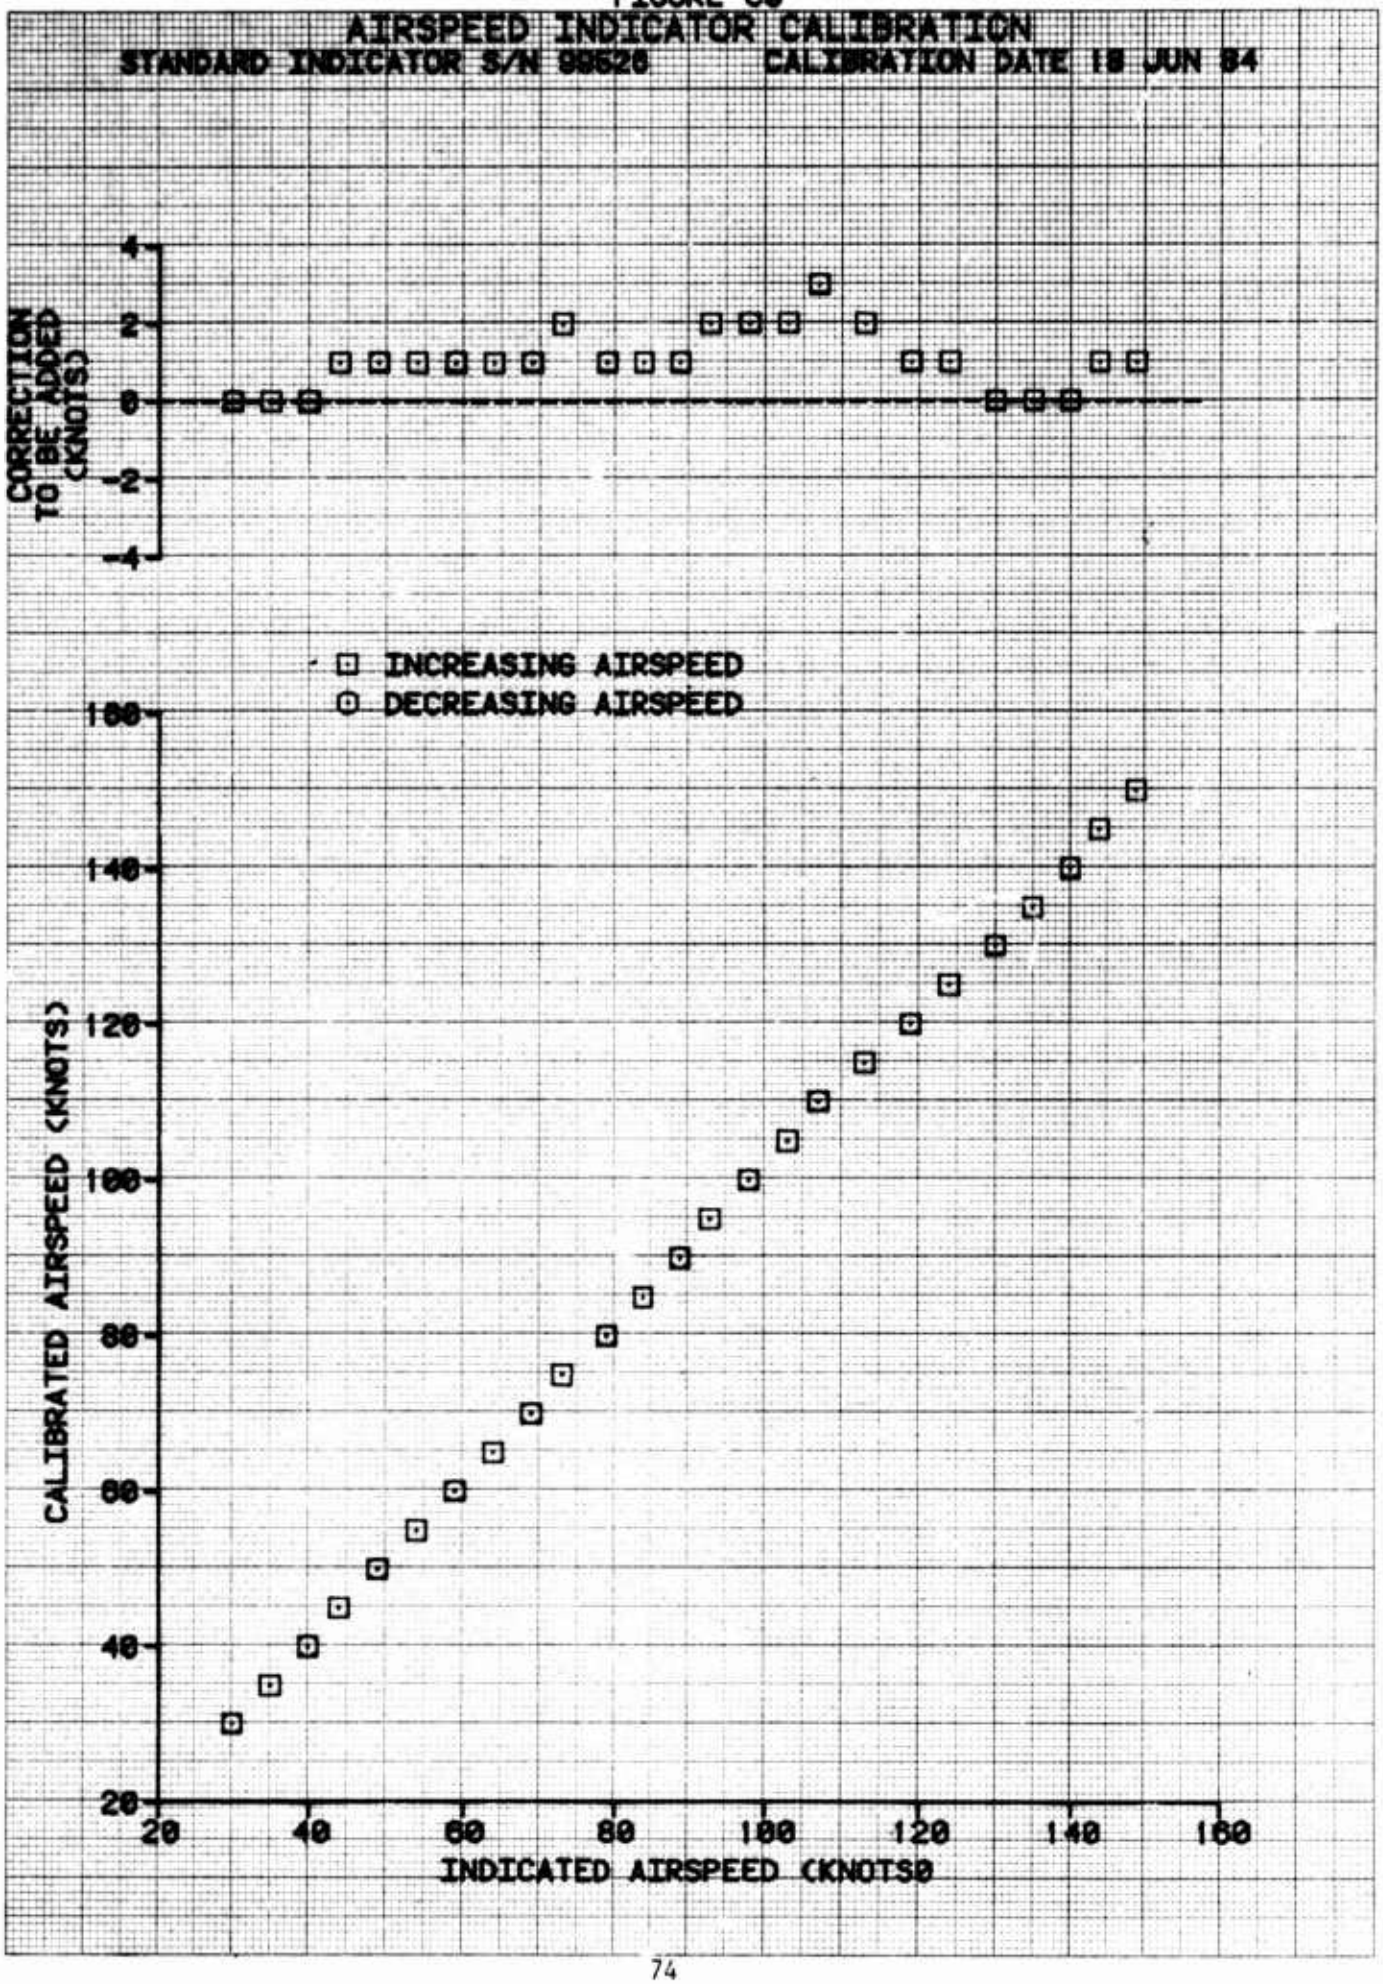

AIRSPEED INDICATOR CALIBRATION
STANDARD INDICATOR S/N 98626
CALIBRATION DATE 18 JUN 84
CORRECTION TO BE ADDED (KNOTS)
4
2
0
-2
-4
INCREASING AIRSPEED
DECREASING AIRSPEED
CALIBRATED AIRSPEED (KNOTS)
20
40
60
80
100
120
140
160
INDICATED AIRSPEED (KNOTS)

FIGURE C10

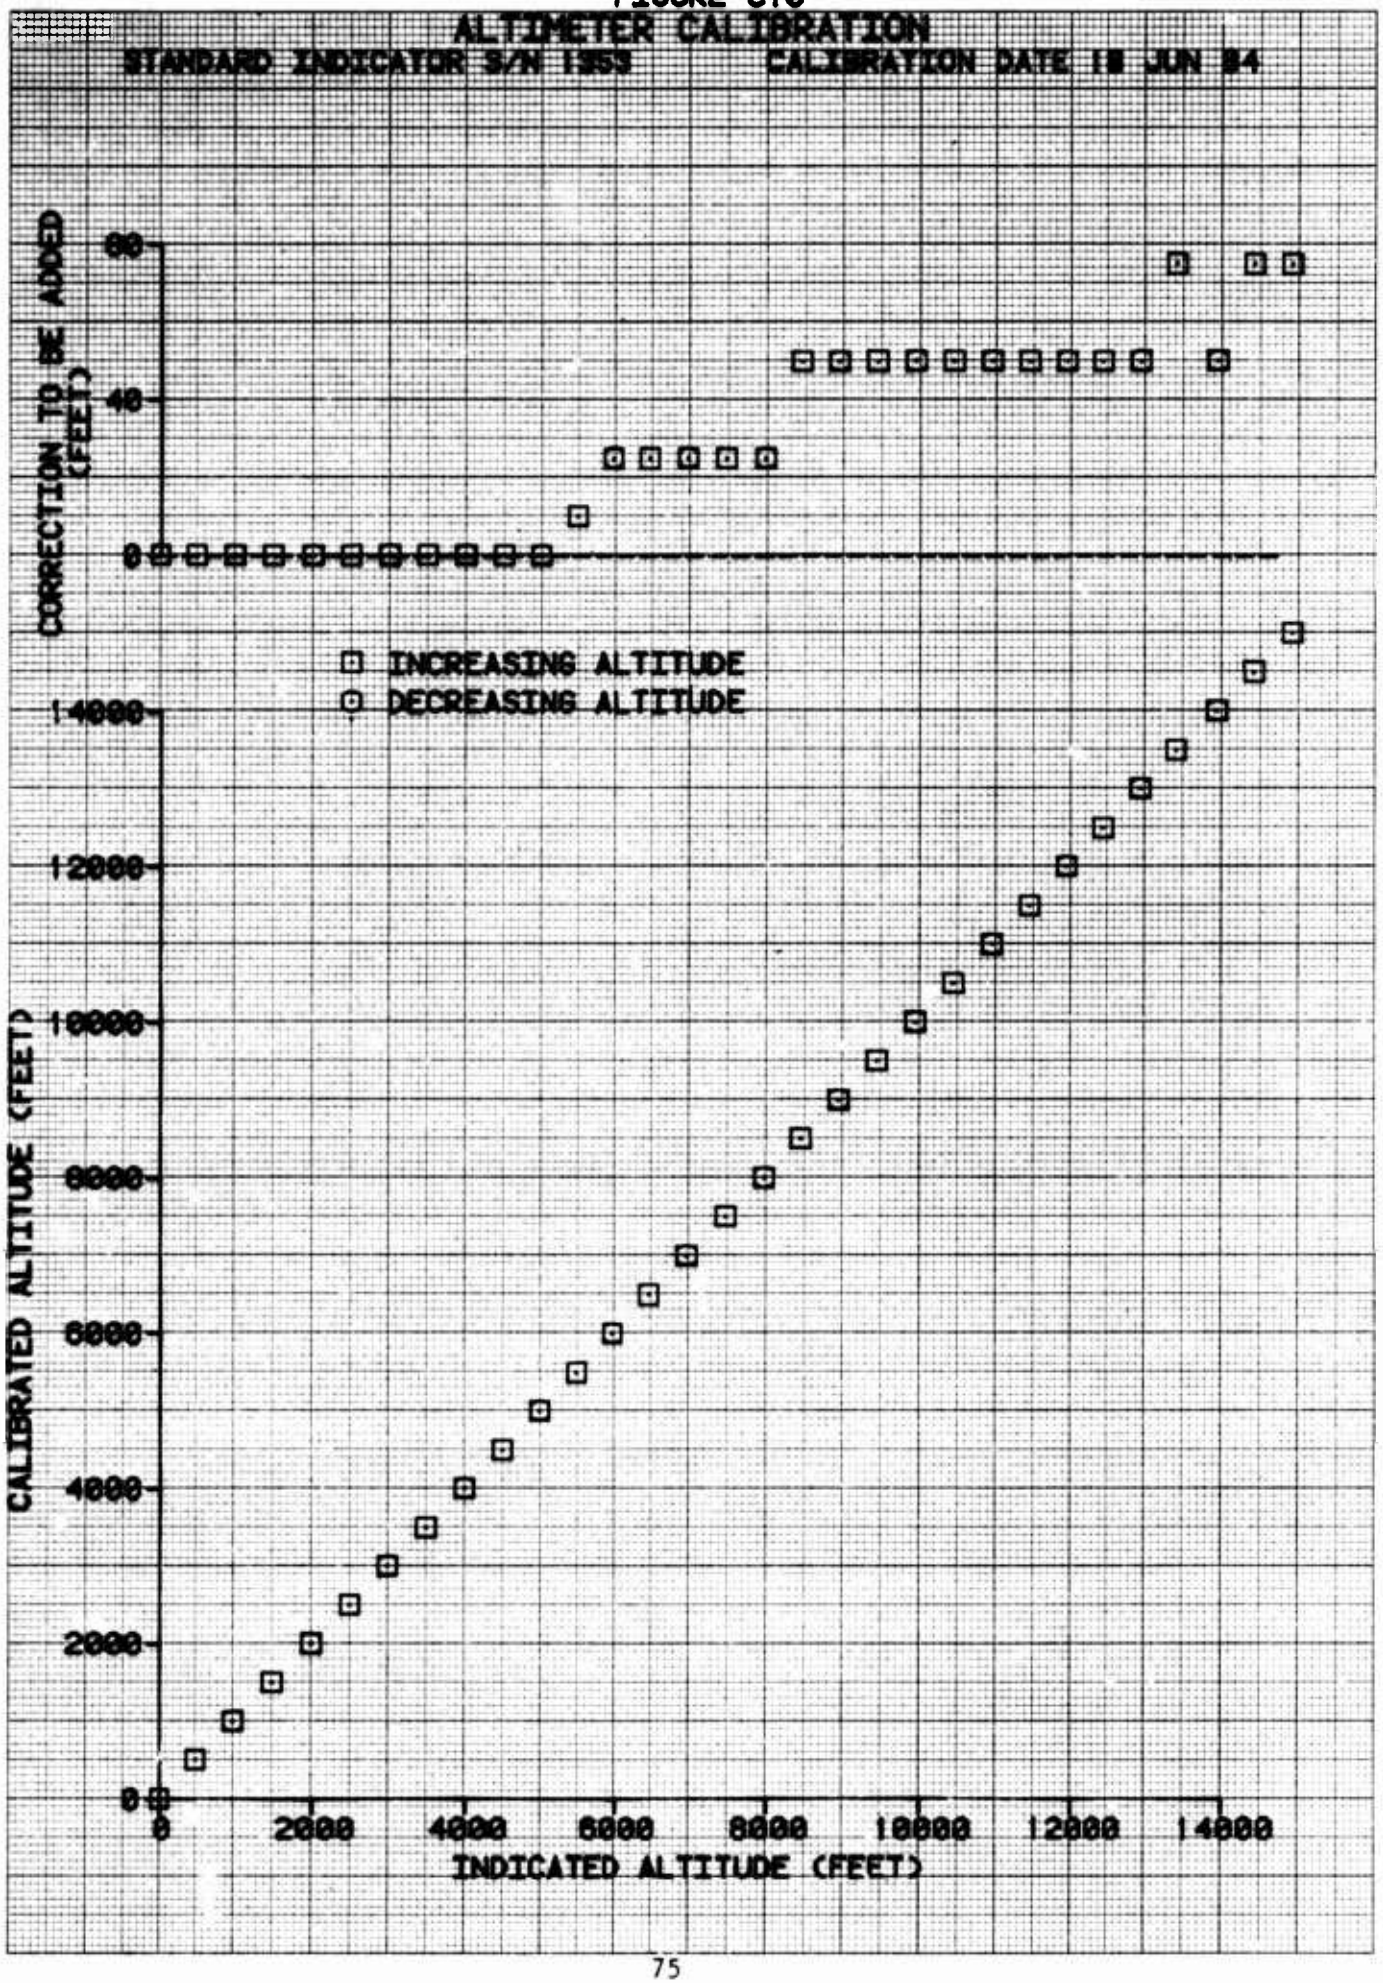

ALTIMETER CALIBRATION
STANDARD INDICATOR S/N 1353
CALIBRATION DATE 18 JUN 84
CORRECTION TO BE ADDED (FEET)
80
40
0
INCREASING ALTITUDE
DECREASING ALTITUDE
CALIBRATED ALTITUDE (FEET)
14000
12000
10000
8000
6000
4000
2000
0
0
2000
4000
6000
8000
10000
12000
14000
INDICATED ALTITUDE (FEET)

FIGURE C11

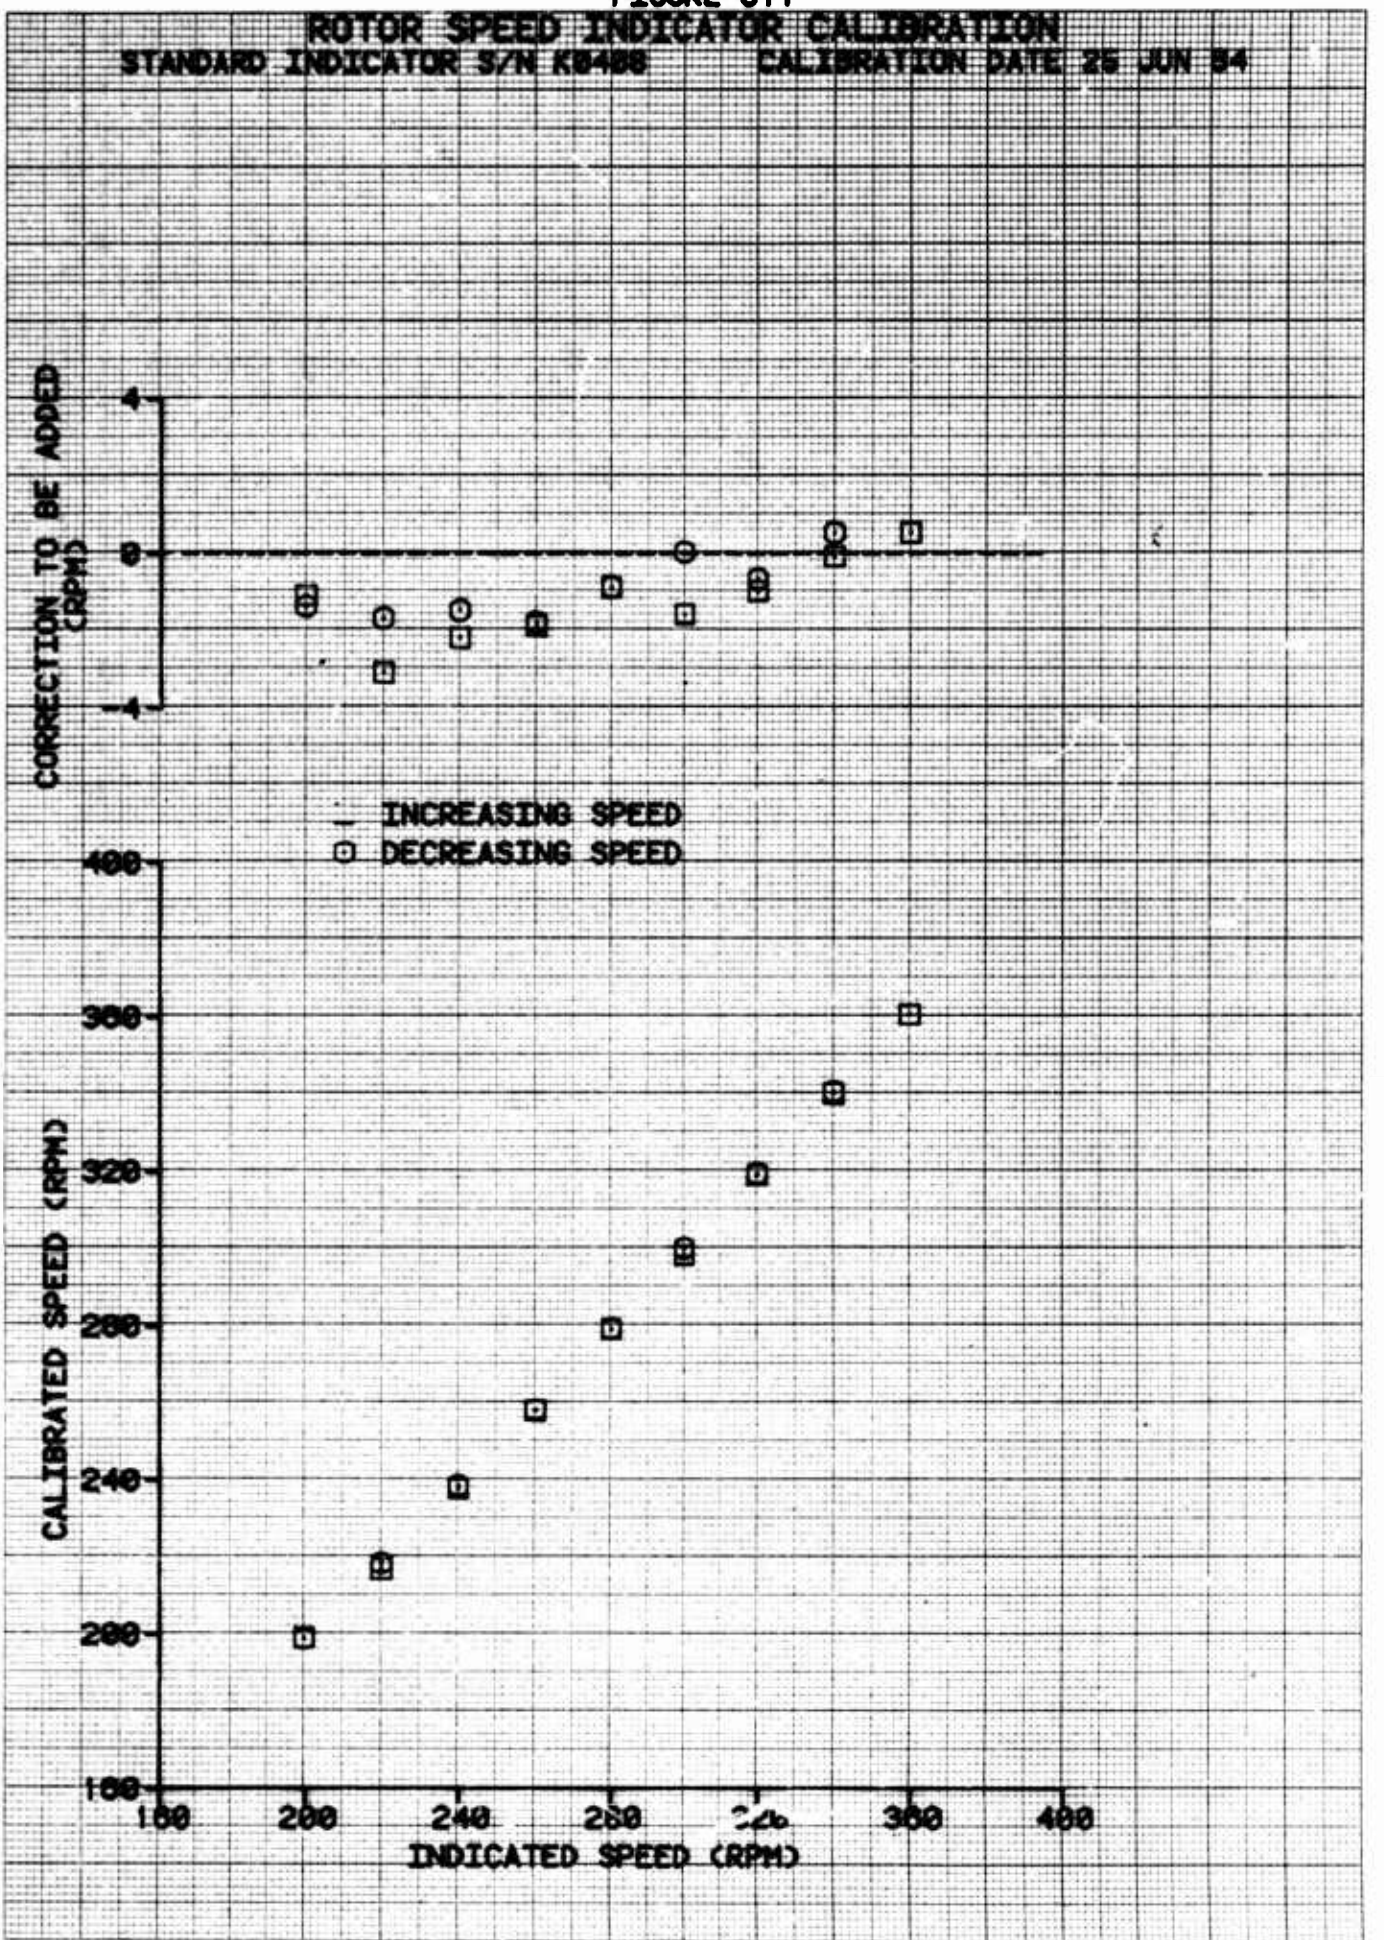

ROTOR SPEED INDICATOR CALIBRATION
STANDARD INDICATOR S/N K0488
CALIBRATION DATE 25 JUN 84
CORRECTION TO BE ADDED (RPM)
4
0
-4
INCREASING SPEED
DECREASING SPEED
CALIBRATED SPEED (RPM)
400
360
320
280
240
200
160
160
200
240
280
320
360
400
INDICATED SPEED (RPM)

FIGURE C12

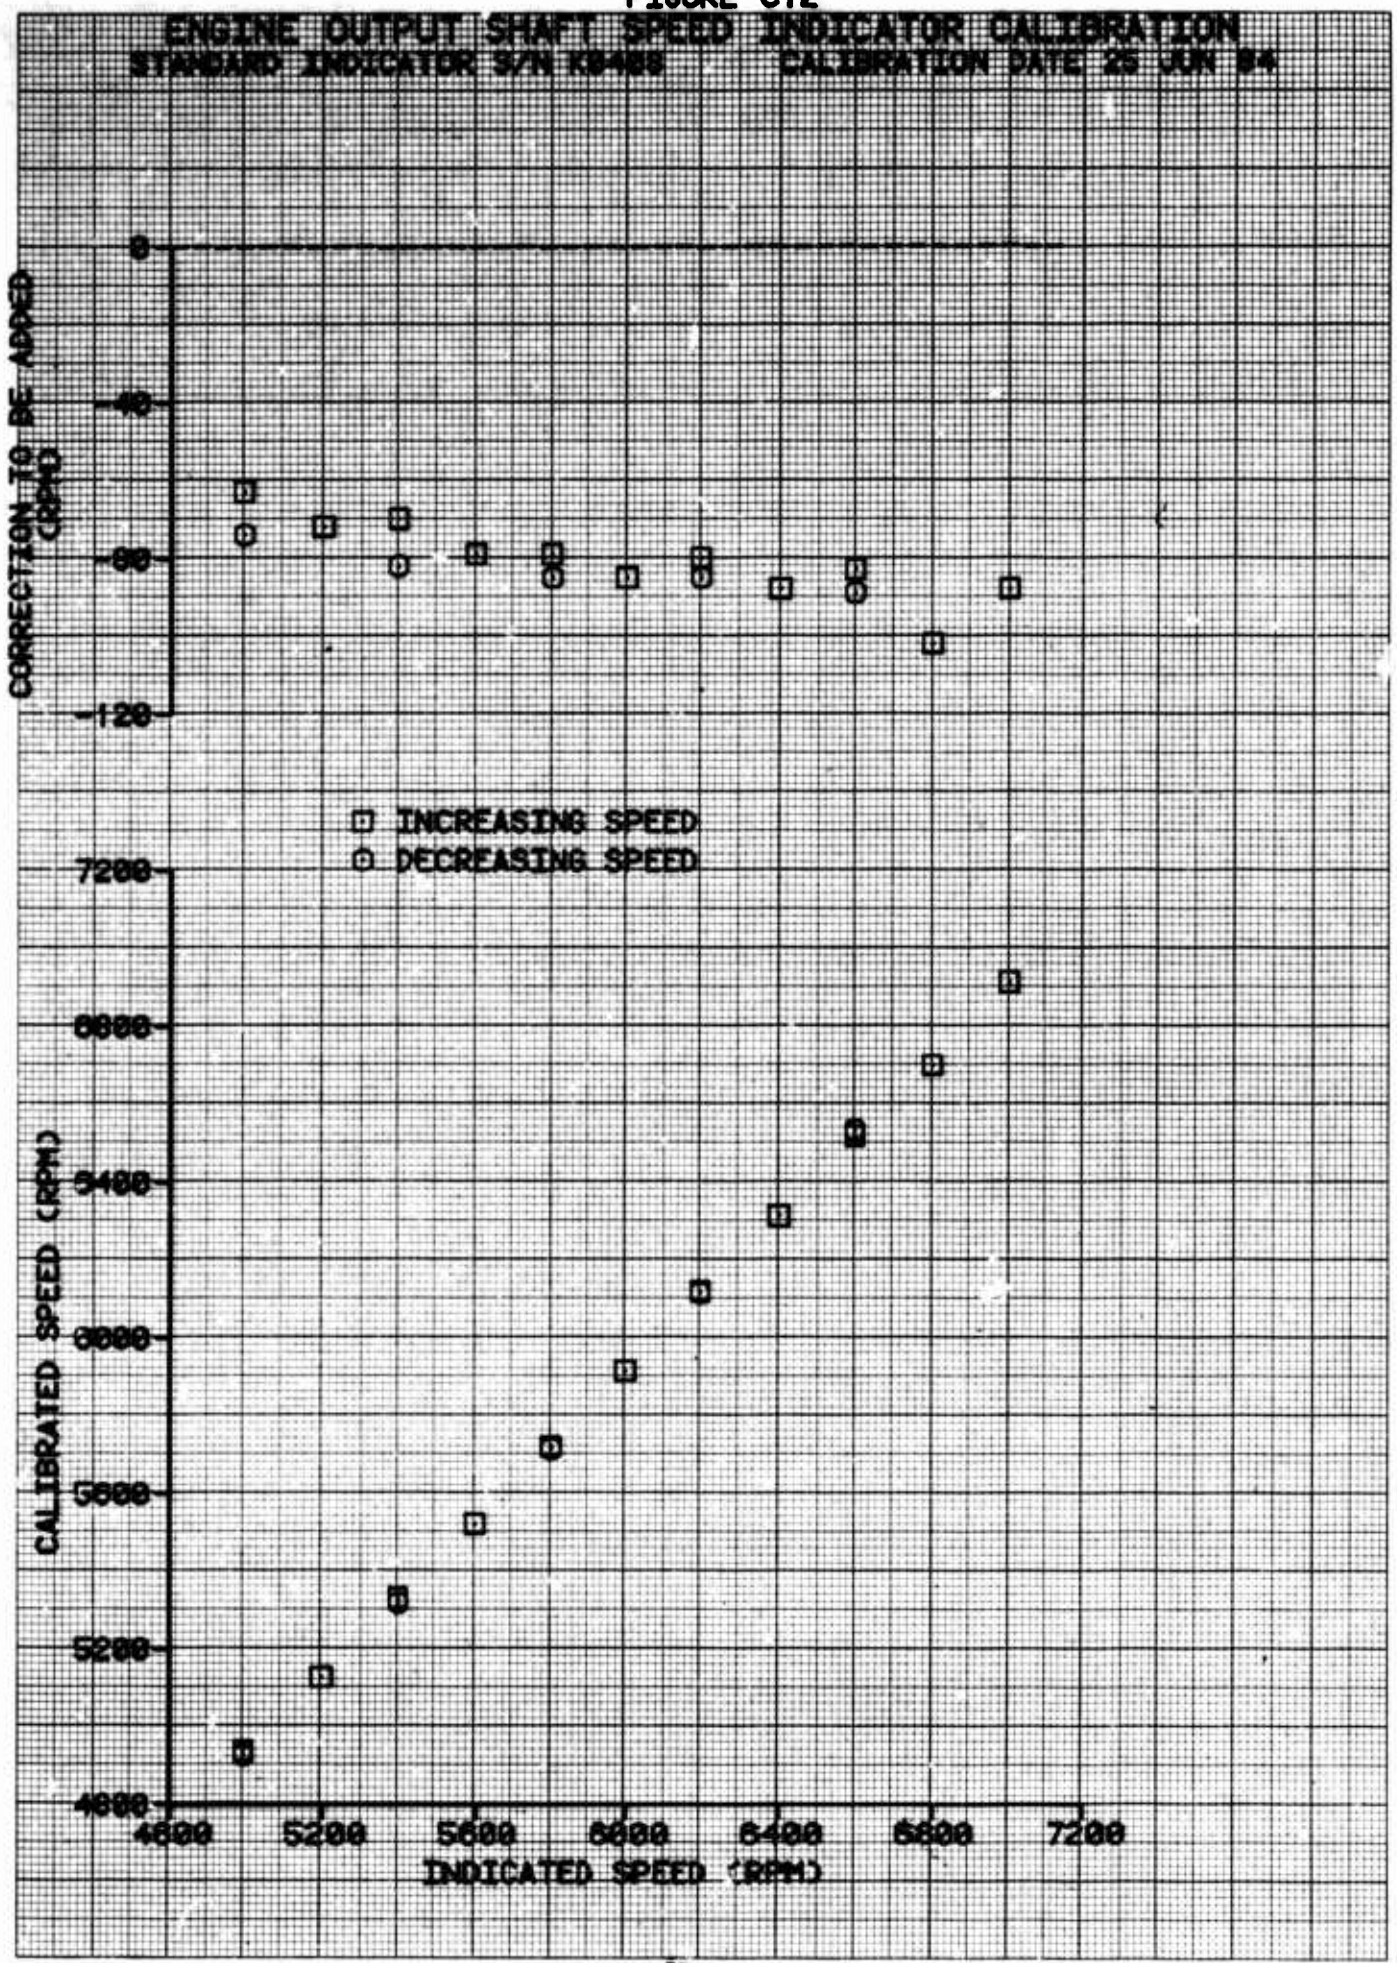

ENGINE OUTPUT SHAFT SPEED INDICATOR CALIBRATION
STANDARD INDICATOR S/N K8488 CALIBRATION DATE 25 JUN 84
CORRECTION TO BE ADDED (RPM)
0
-40
-80
-120
INCREASING SPEED
DECREASING SPEED
CALIBRATED SPEED (RPM)
7200
6800
6400
6000
5600
5200
4800
4800
5200
5600
6000
6400
6800
7200
INDICATED SPEED (RPM)

FIGURE C13

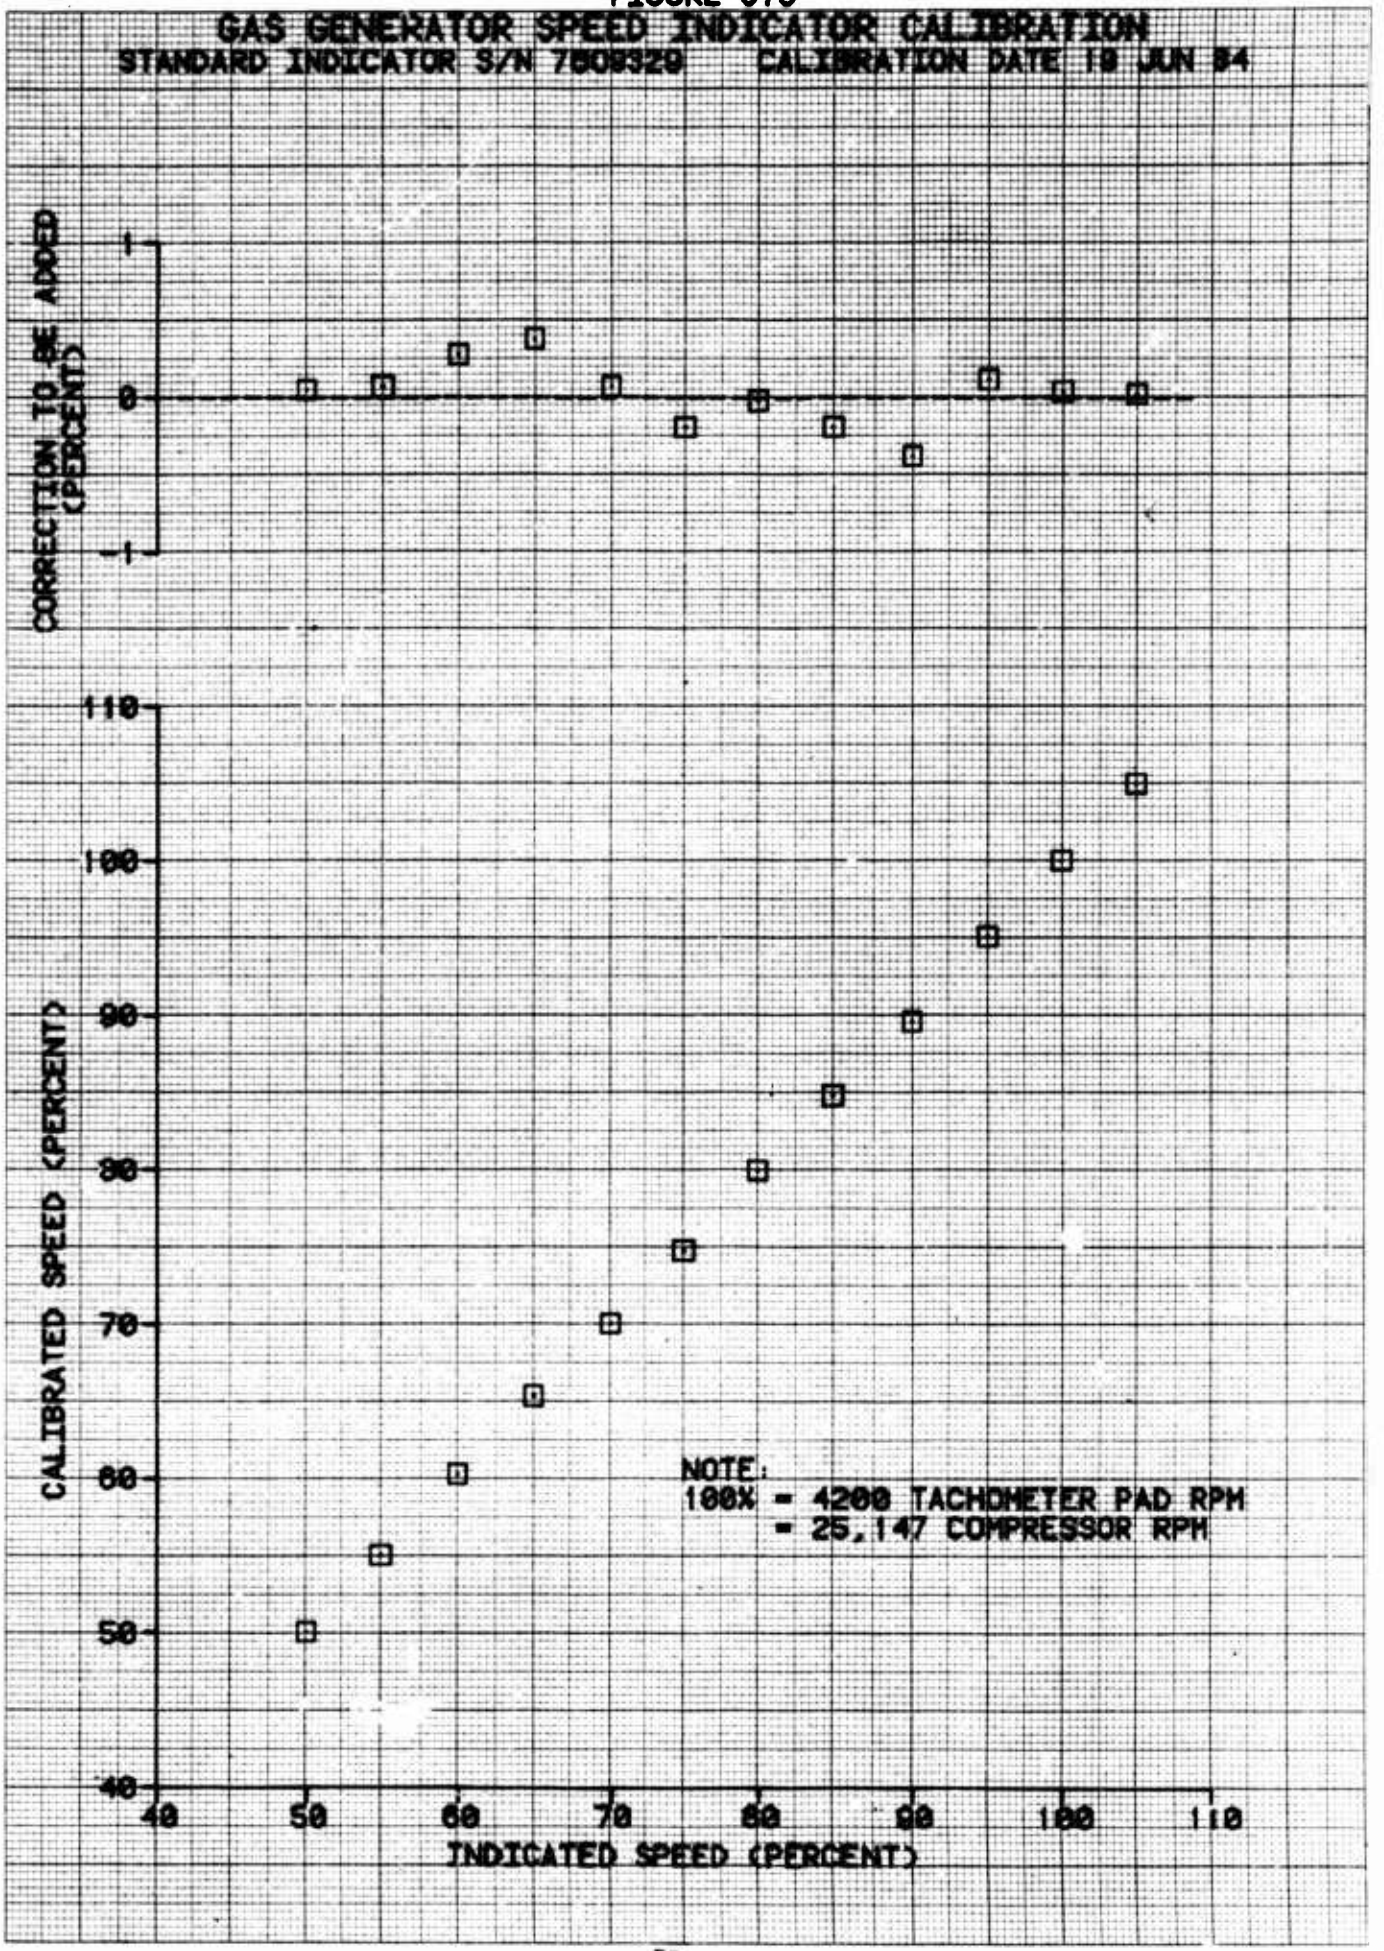

GAS GENERATOR SPEED INDICATOR CALIBRATION
STANDARD INDICATOR S/N 7509329 CALIBRATION DATE 19 JUN 84
CORRECTION TO BE ADDED (PERCENT)
1
0
-1
CALIBRATED SPEED (PERCENT)
110
100
90
80
70
60
50
40
40
50
60
70
80
90
100
110
INDICATED SPEED (PERCENT)
NOTE:
100% = 4200 TACHOMETER PAD RPM
= 25,147 COMPRESSOR RPM

FIGURE C14

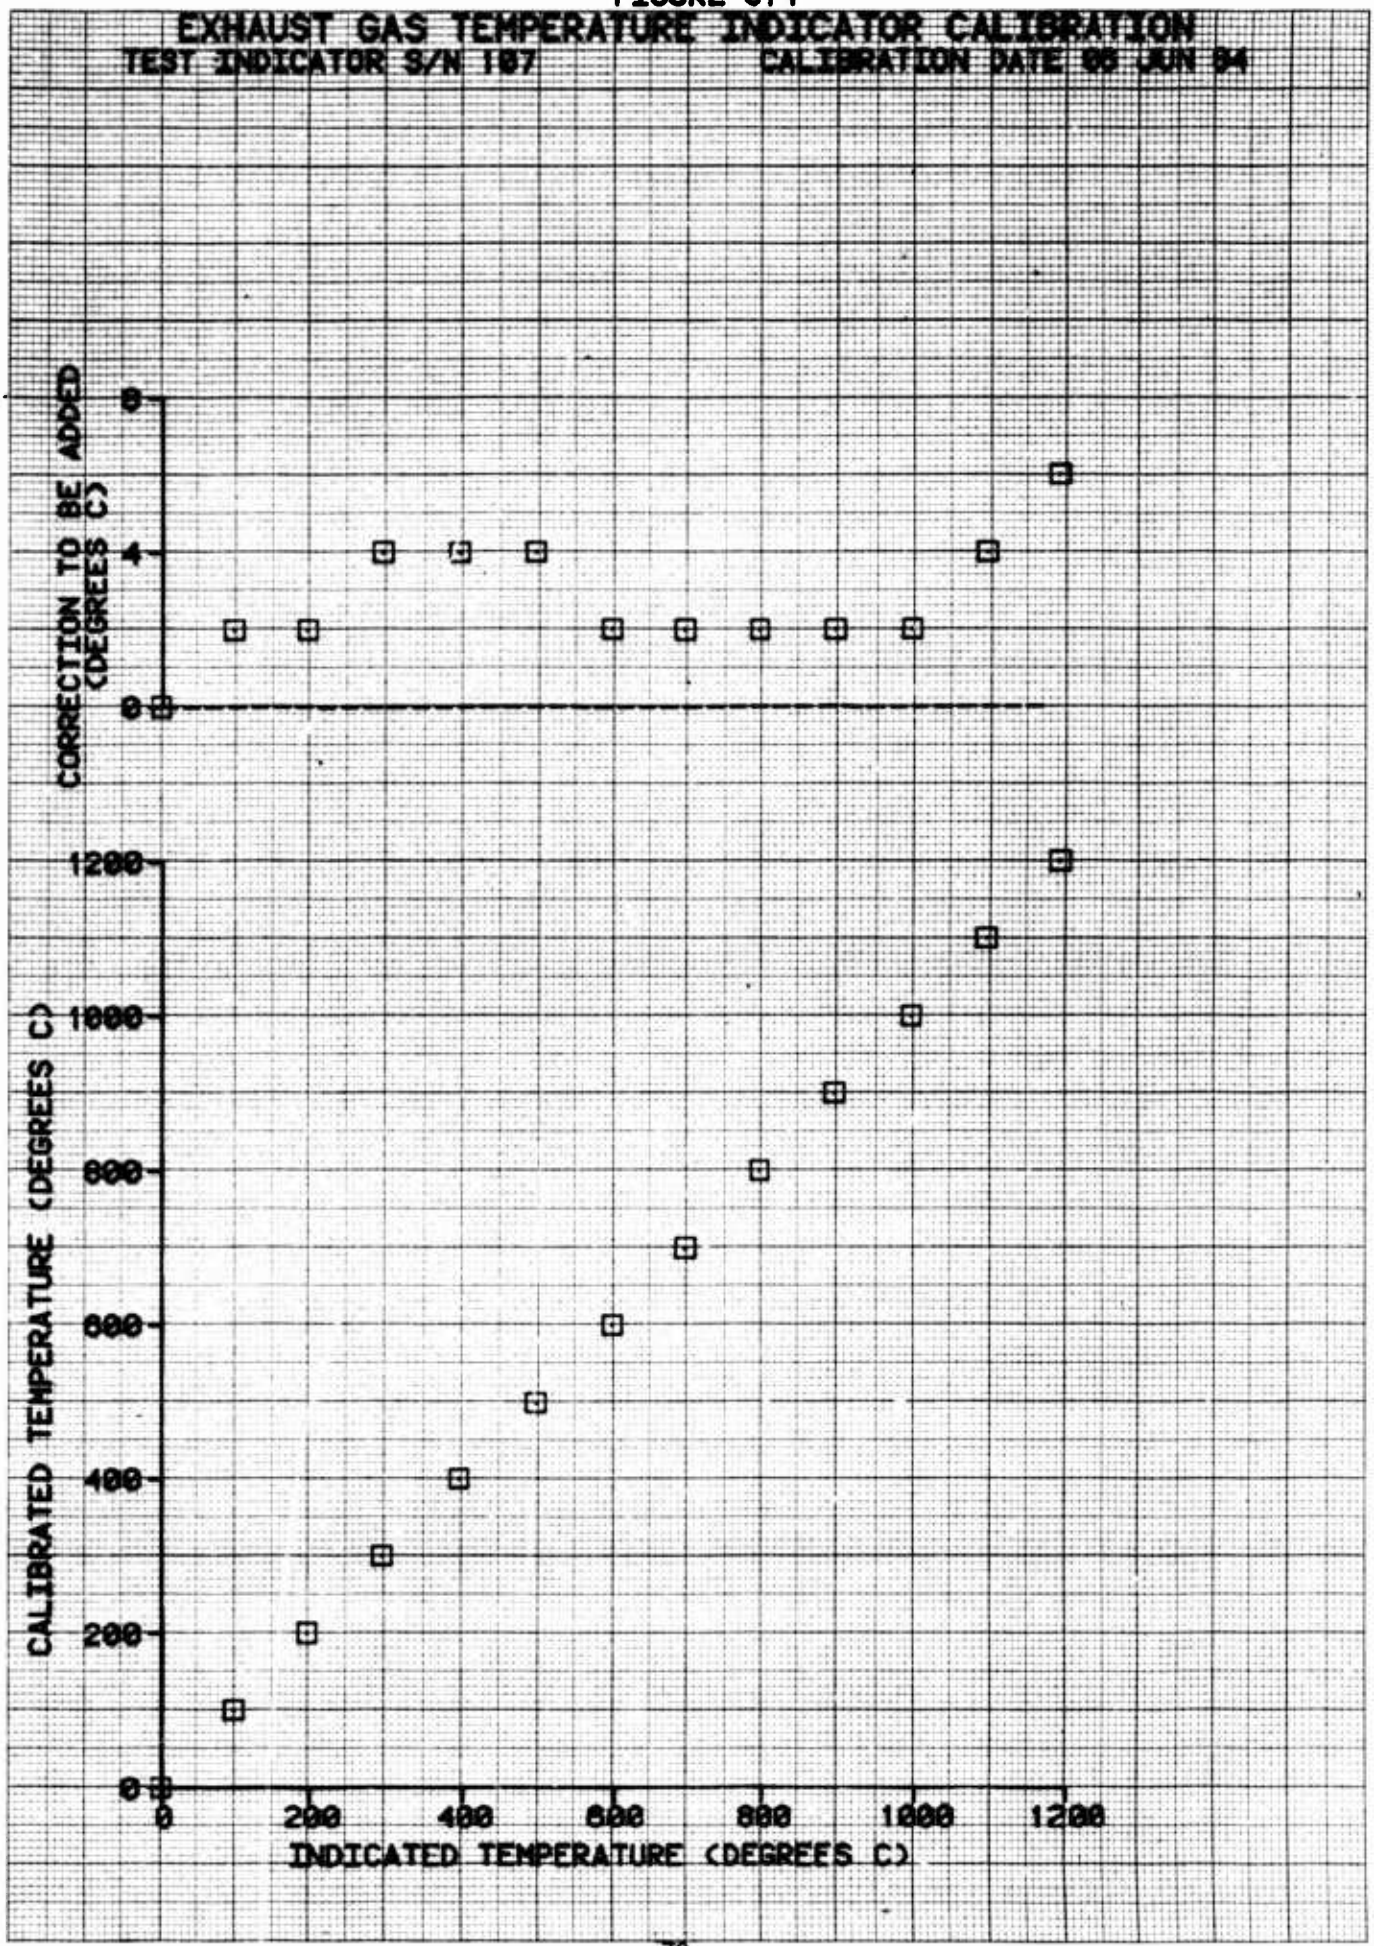
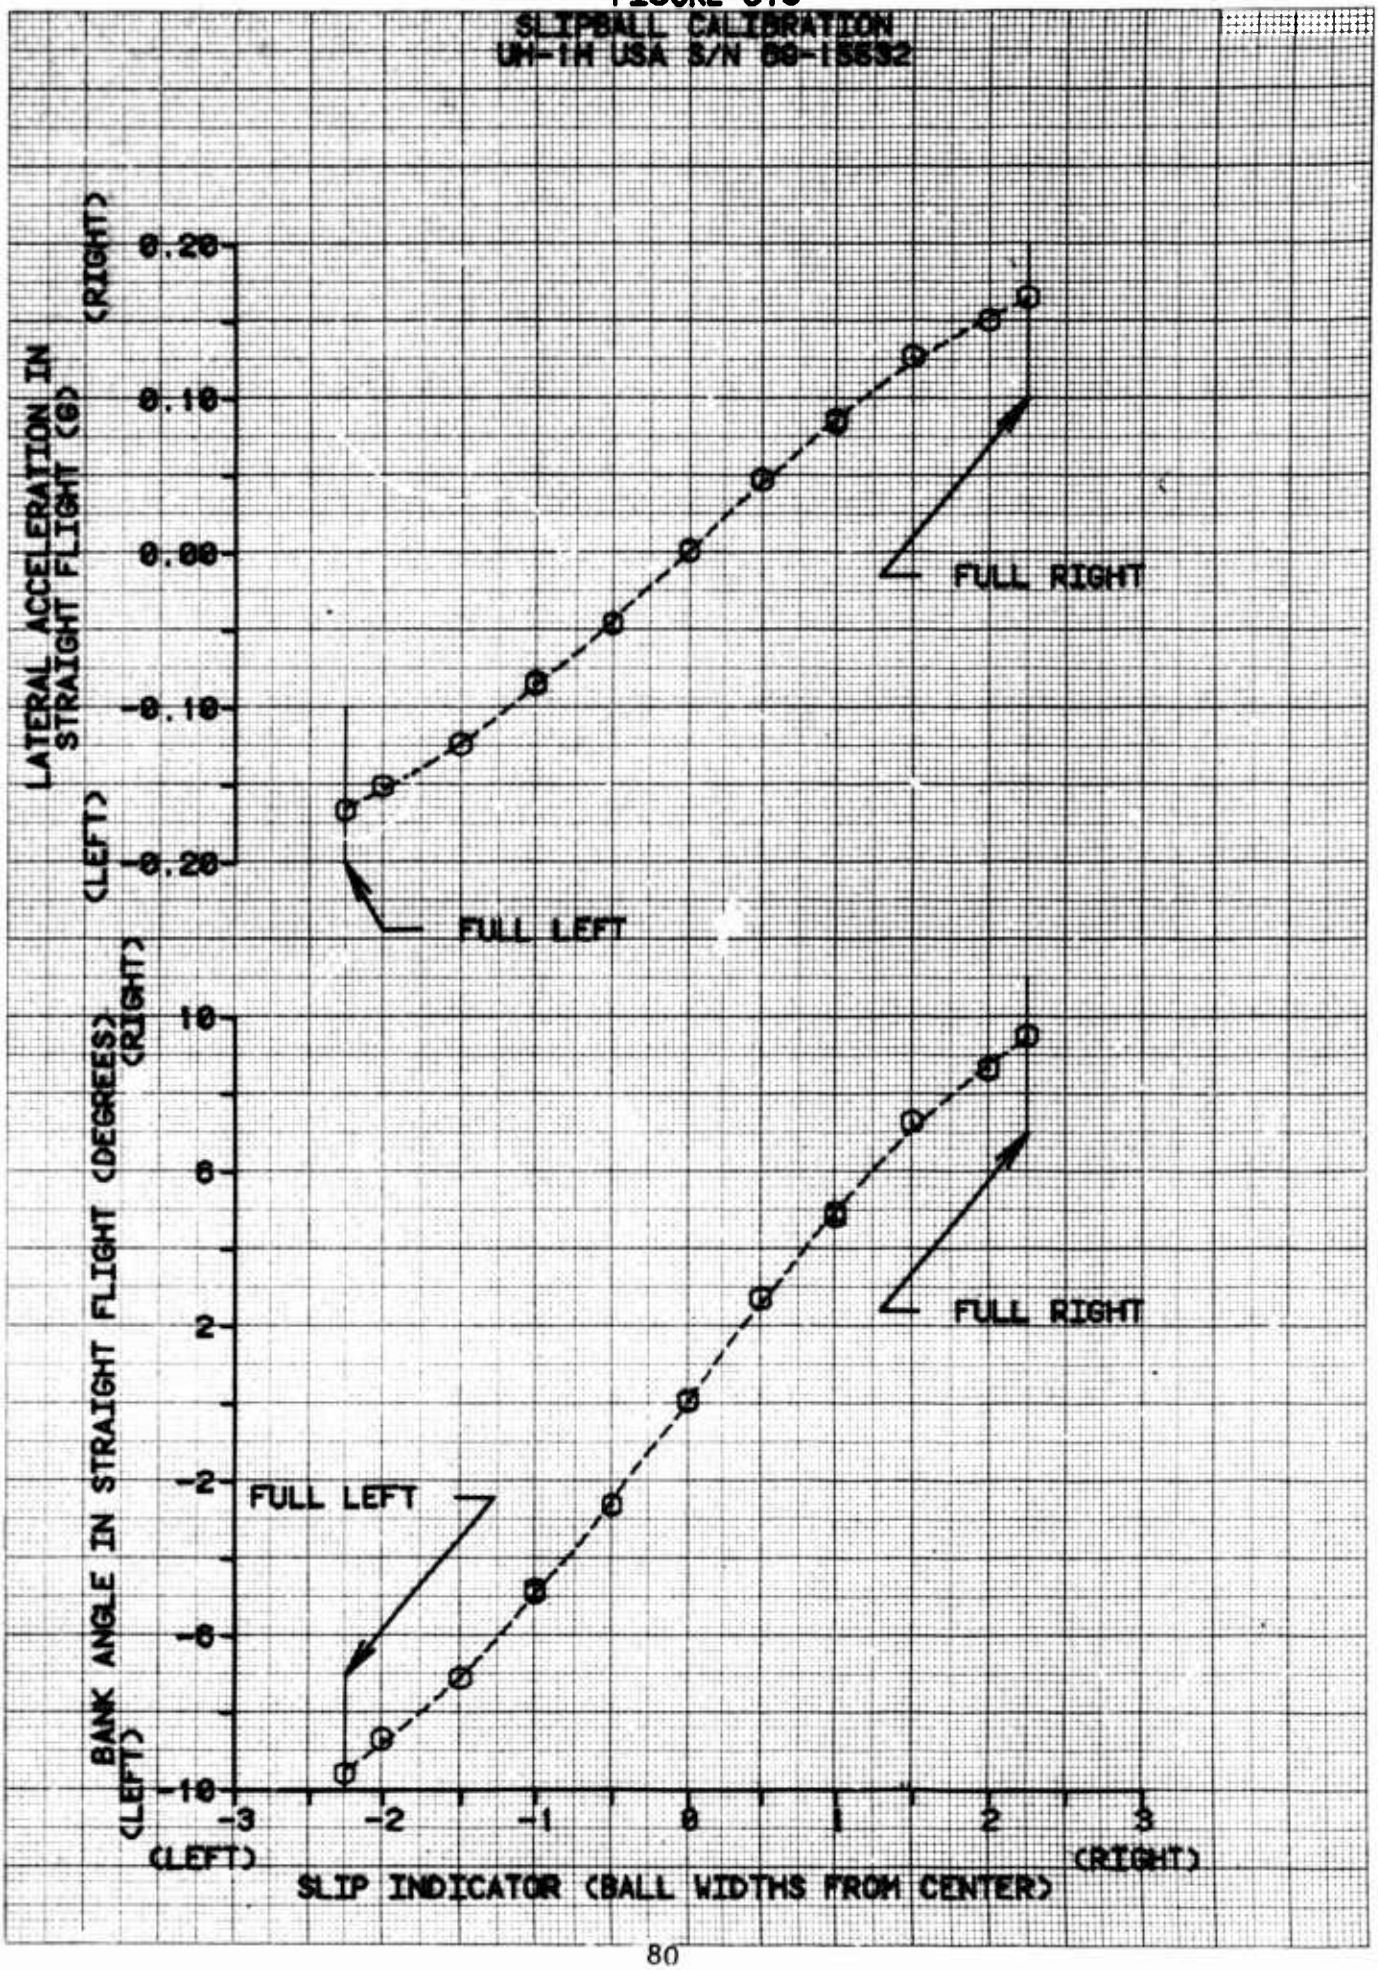

EXHAUST GAS TEMPERATURE INDICATOR CALIBRATION
TEST INDICATOR S/N 107
CALIBRATION DATE 06 JUN 84
CORRECTION TO BE ADDED (DEGREES C)
0
4
0
CALIBRATED TEMPERATURE (DEGREES C)
1200
1000
800
600
400
200
0
0
200
400
600
800
1000
1200
INDICATED TEMPERATURE (DEGREES C)

FIGURE C15


SLIPBALL CALIBRATION
UH-1H USA S/N 66-15652
LATERAL ACCELERATION IN STRAIGHT FLIGHT (G)
(LEFT)
(RIGHT)
0.20
0.10
0.00
0.10
0.20
FULL LEFT
FULL RIGHT
BANK ANGLE IN STRAIGHT FLIGHT (DEGREES)
(LEFT)
(RIGHT)
10
6
2
-2
-6
-10
FULL LEFT
FULL RIGHT
-3
-2
-1
0
1
2
3
(LEFT)
(RIGHT)
SLIP INDICATOR (BALL WIDTHS FROM CENTER)

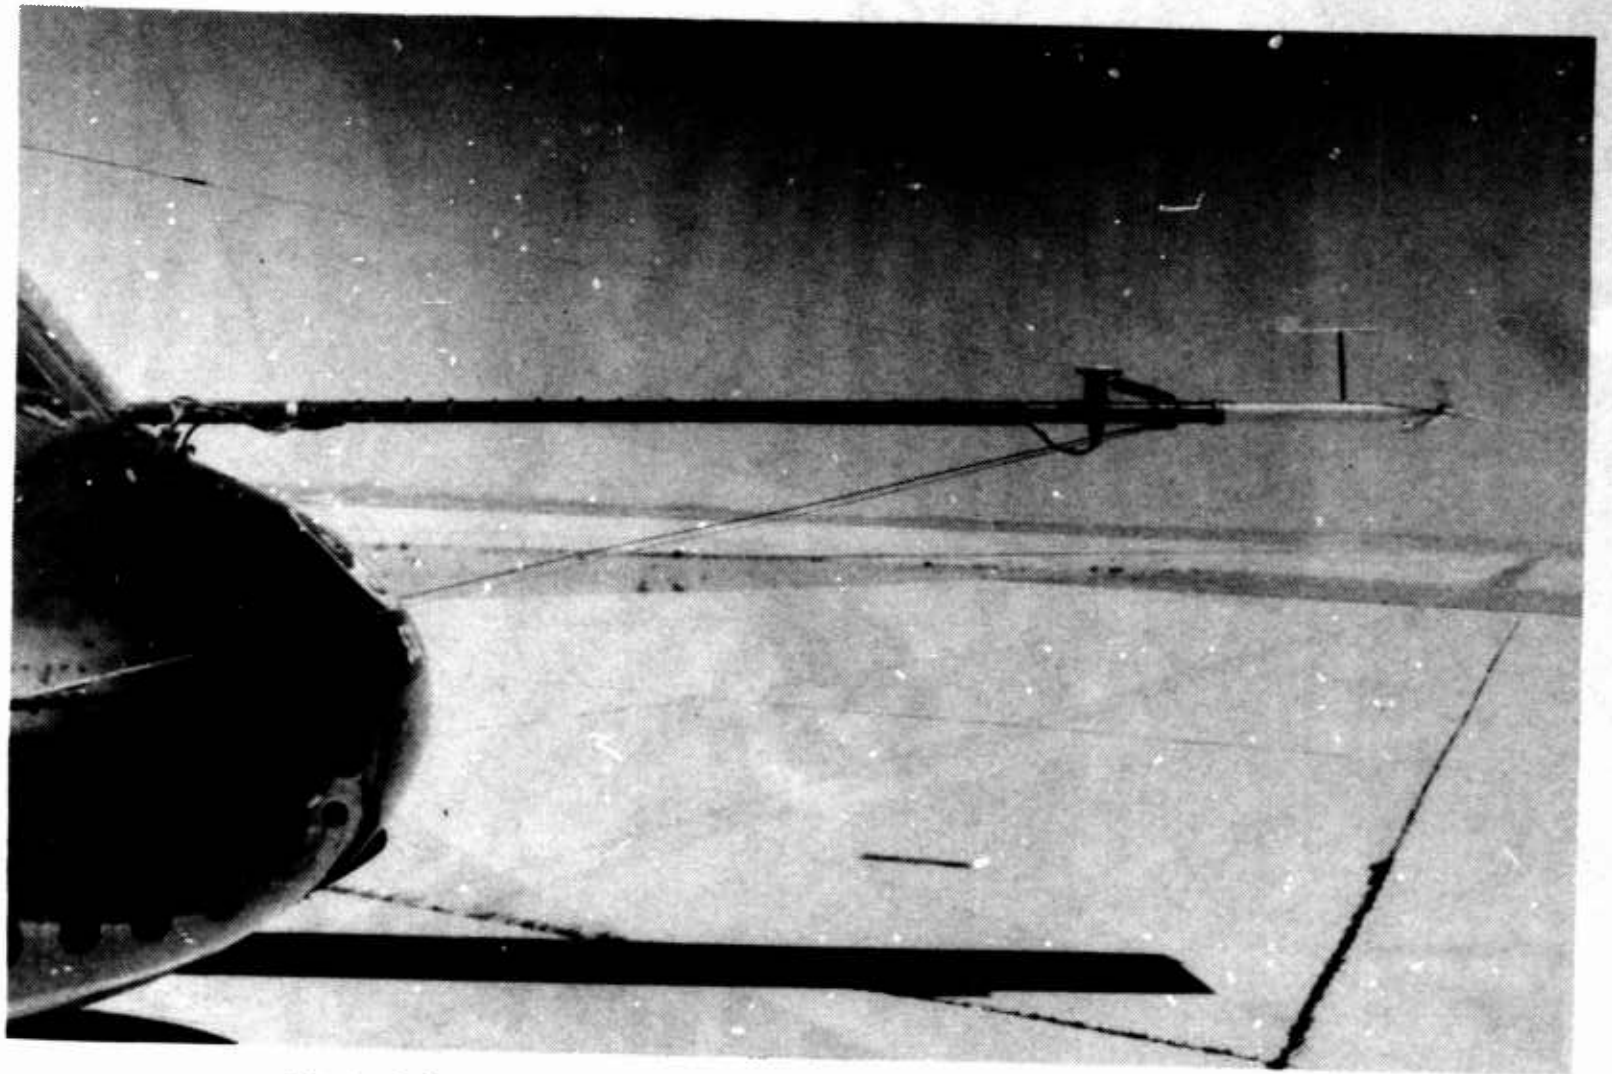


Photo C-1. Airspeed Boom with Swiveling Pitot-Static Probe, Sideslip Vane and Ram Air Temperature Probe



Photo C-2. Dew Point Temperature Sensor

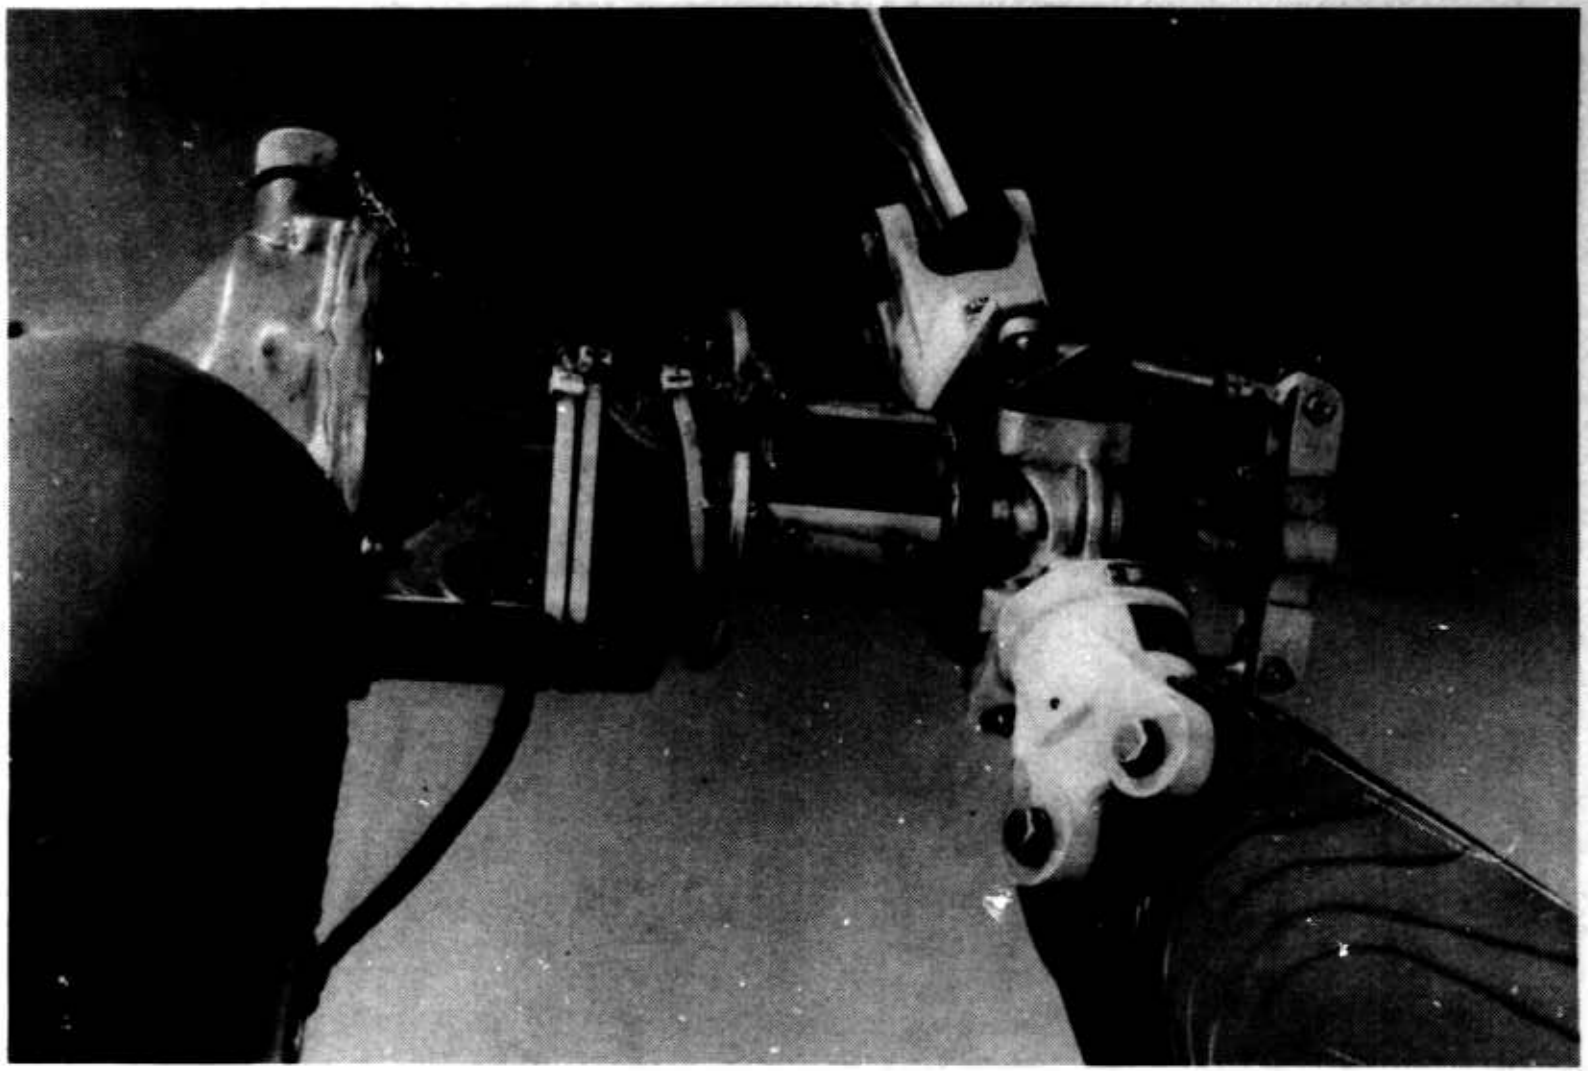


Photo C-3. Tail Rotor Slipring Assembly



Photo C-4. Tail Rotor Collective Potentiometer Cover

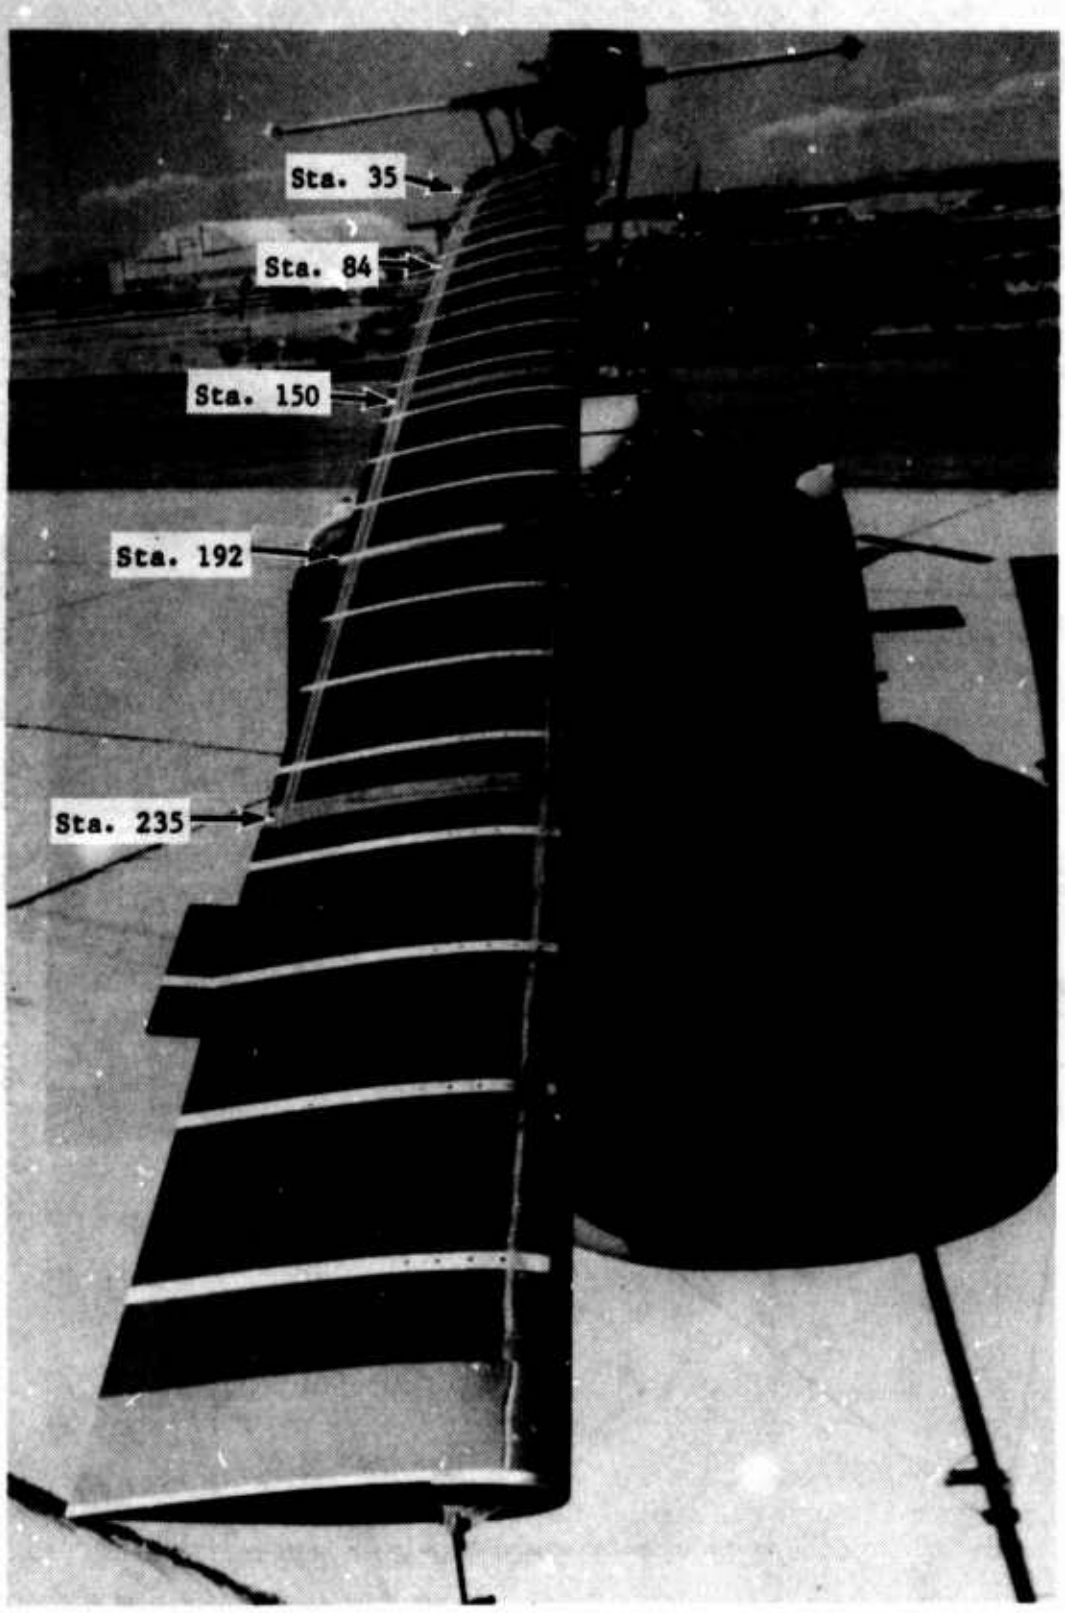


Photo C-5. Strain Gaged Blade with Icing Zone Paint

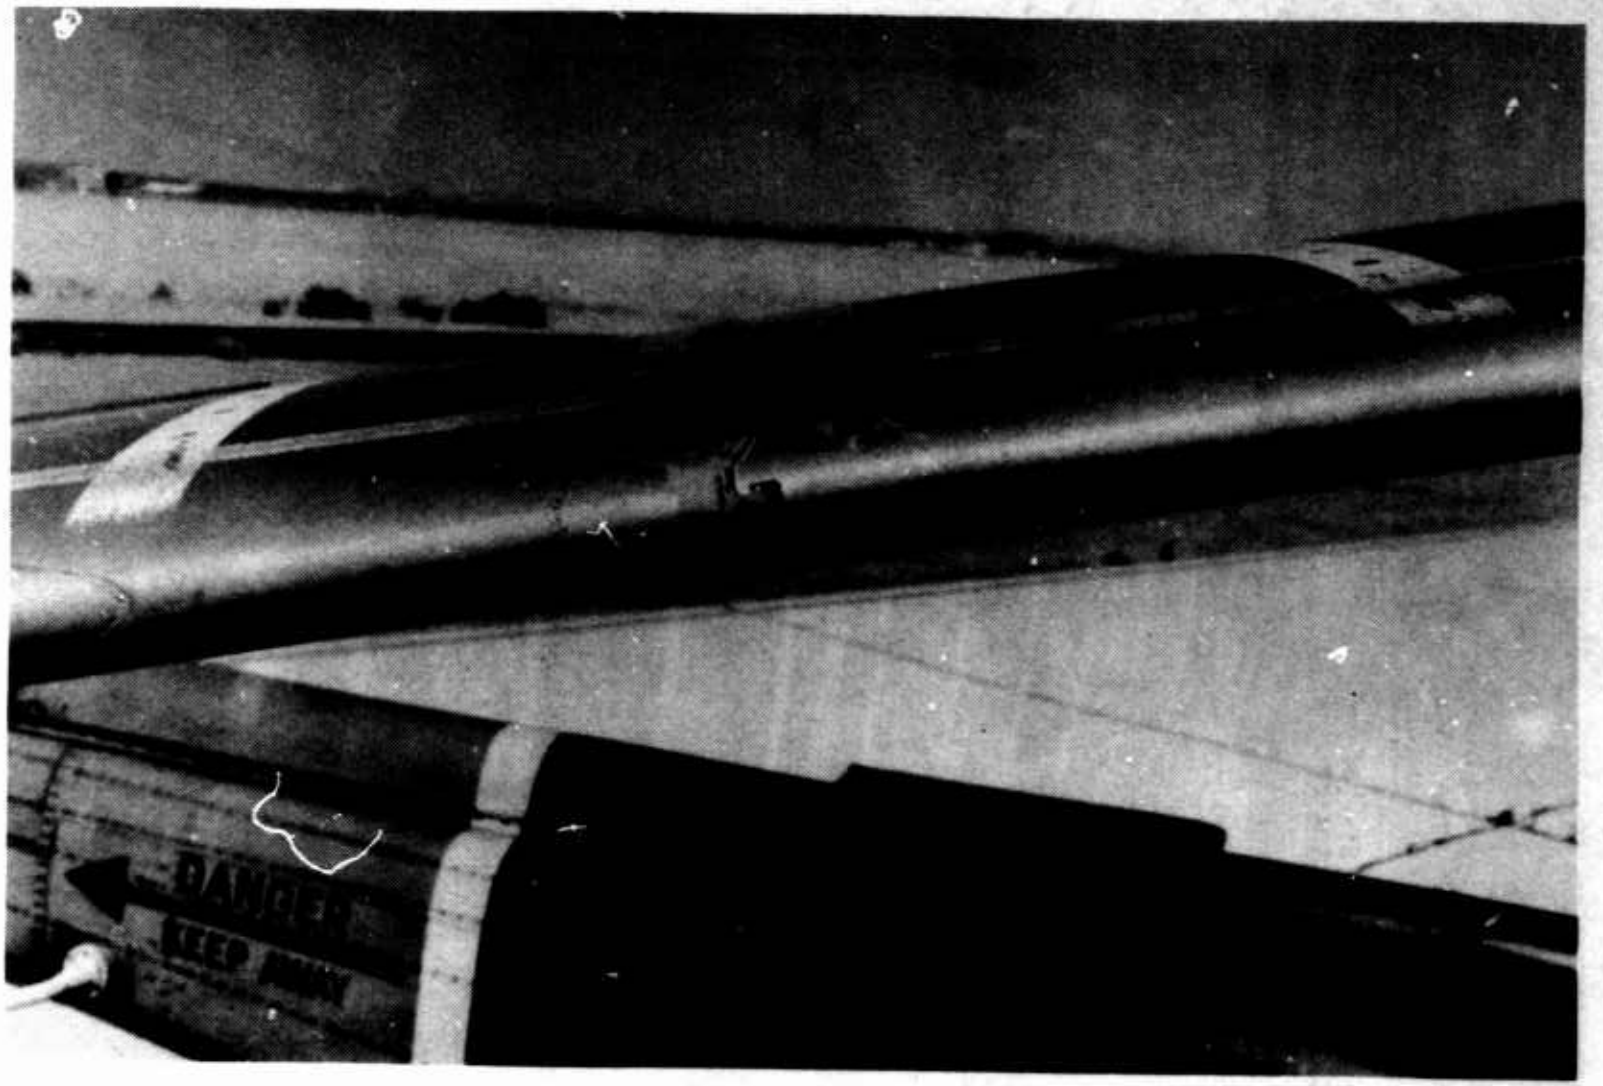


Photo C-6. Eroded Leading Edge Gage



Photo C-7. Upper Main Rotor Slipring and Wire Bundles

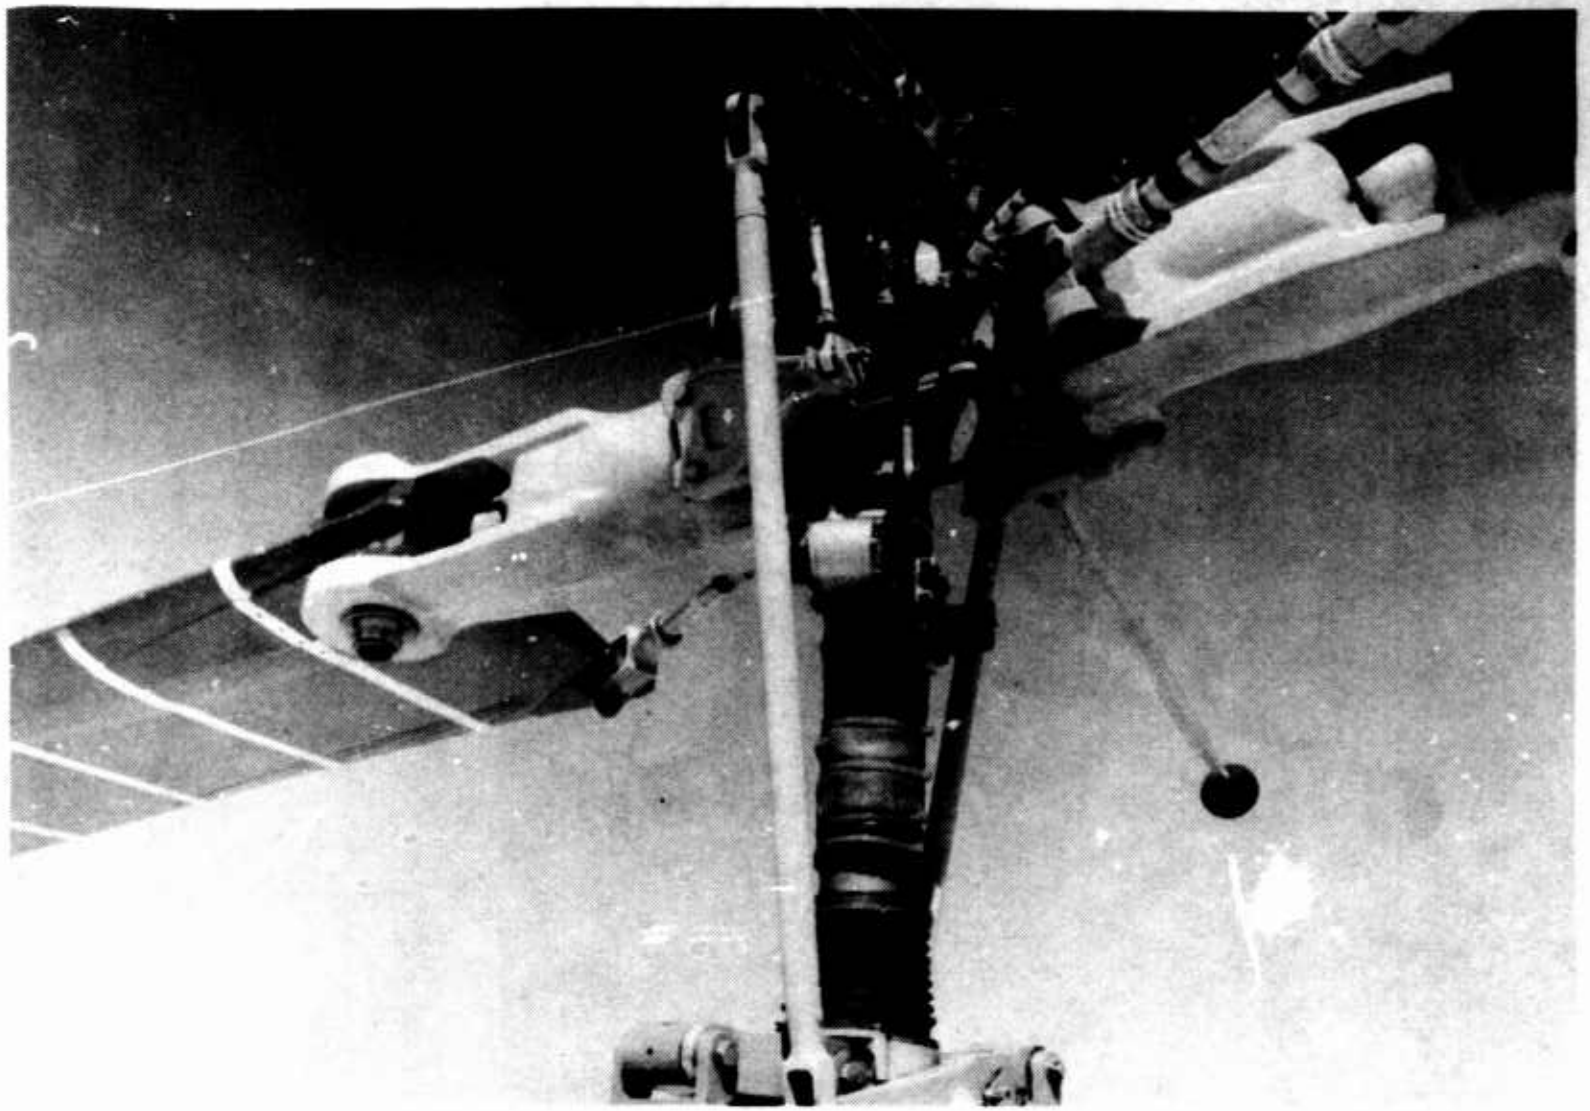


Photo C-8. Overall View Main Rotor Mast and Hub Instrumentation

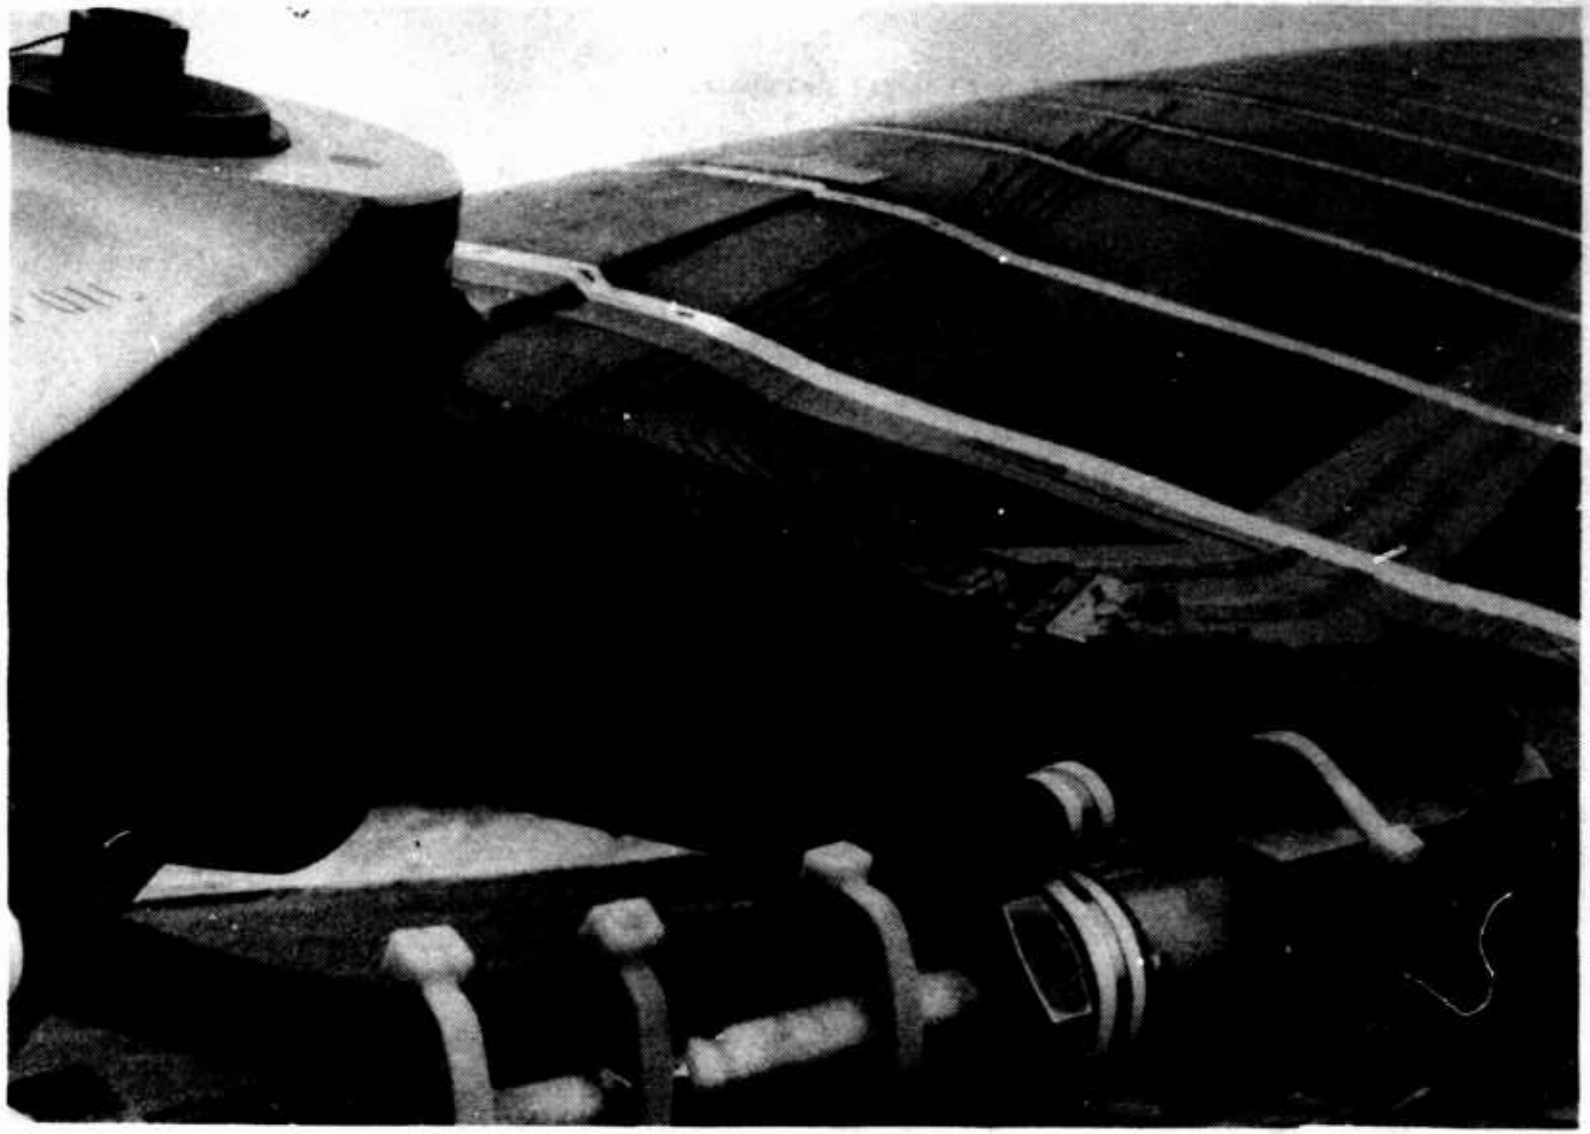


Photo C-9. Rotor Blade Strain Gage Array Plug and Wire Bundle

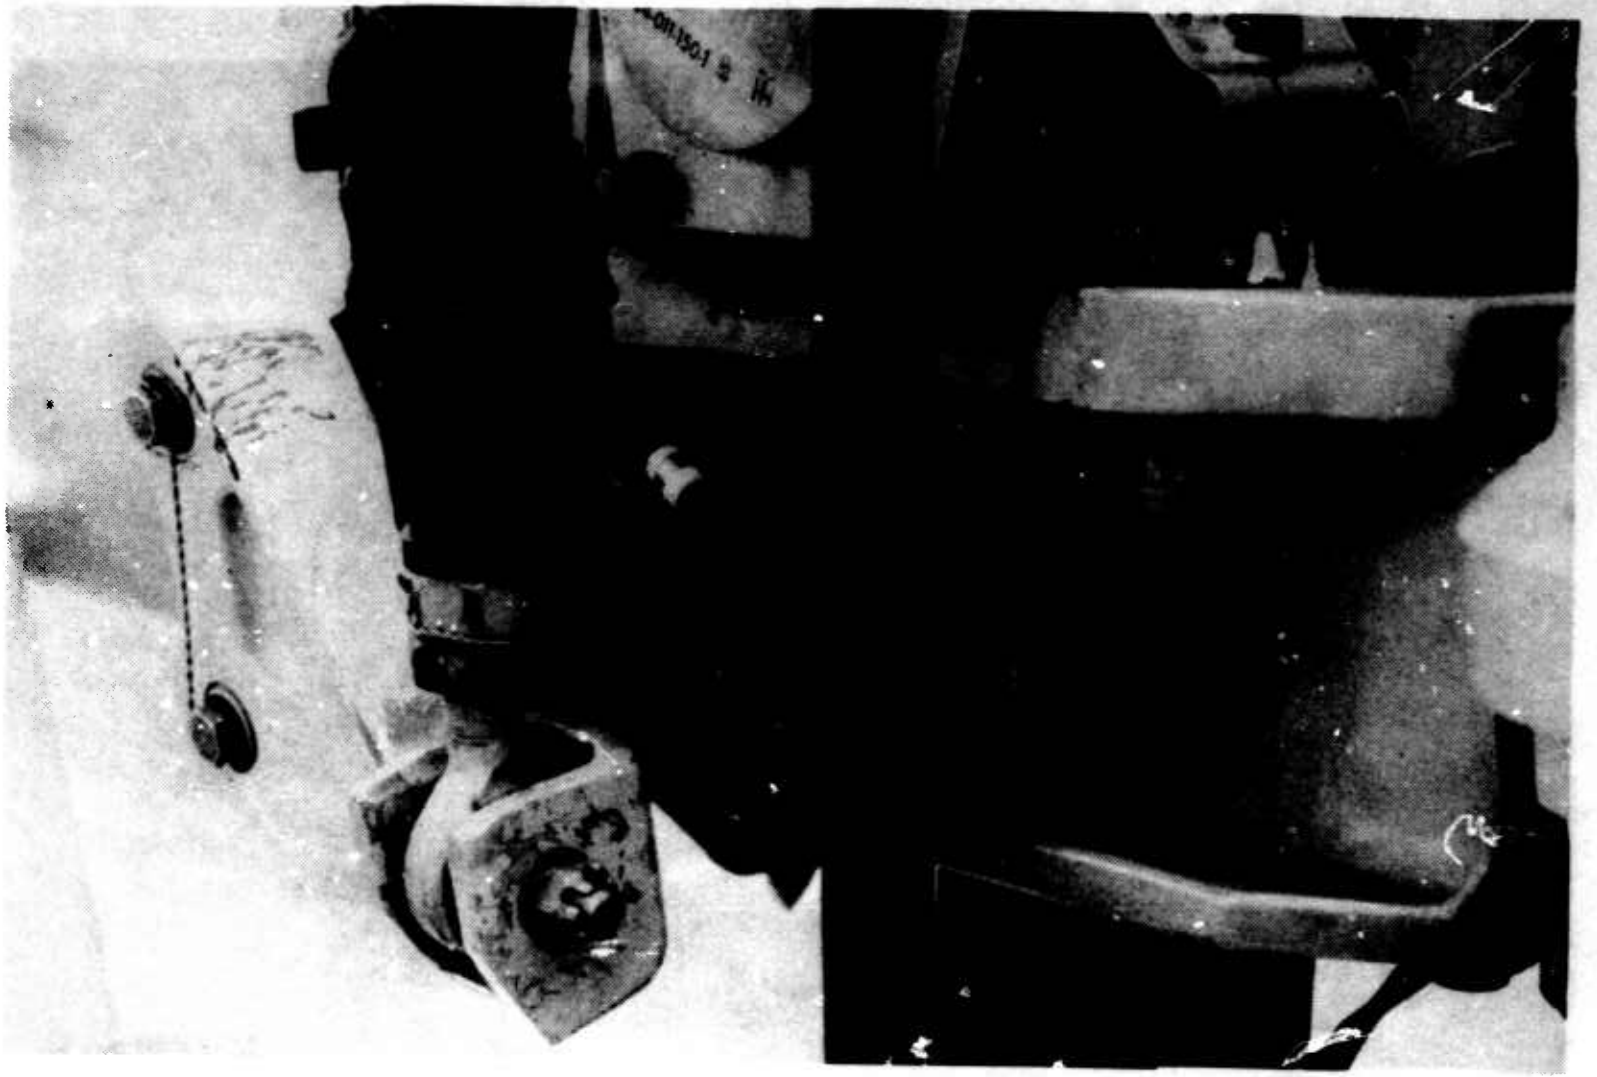


Photo C-10. Instrumented Pitch Link Bundle

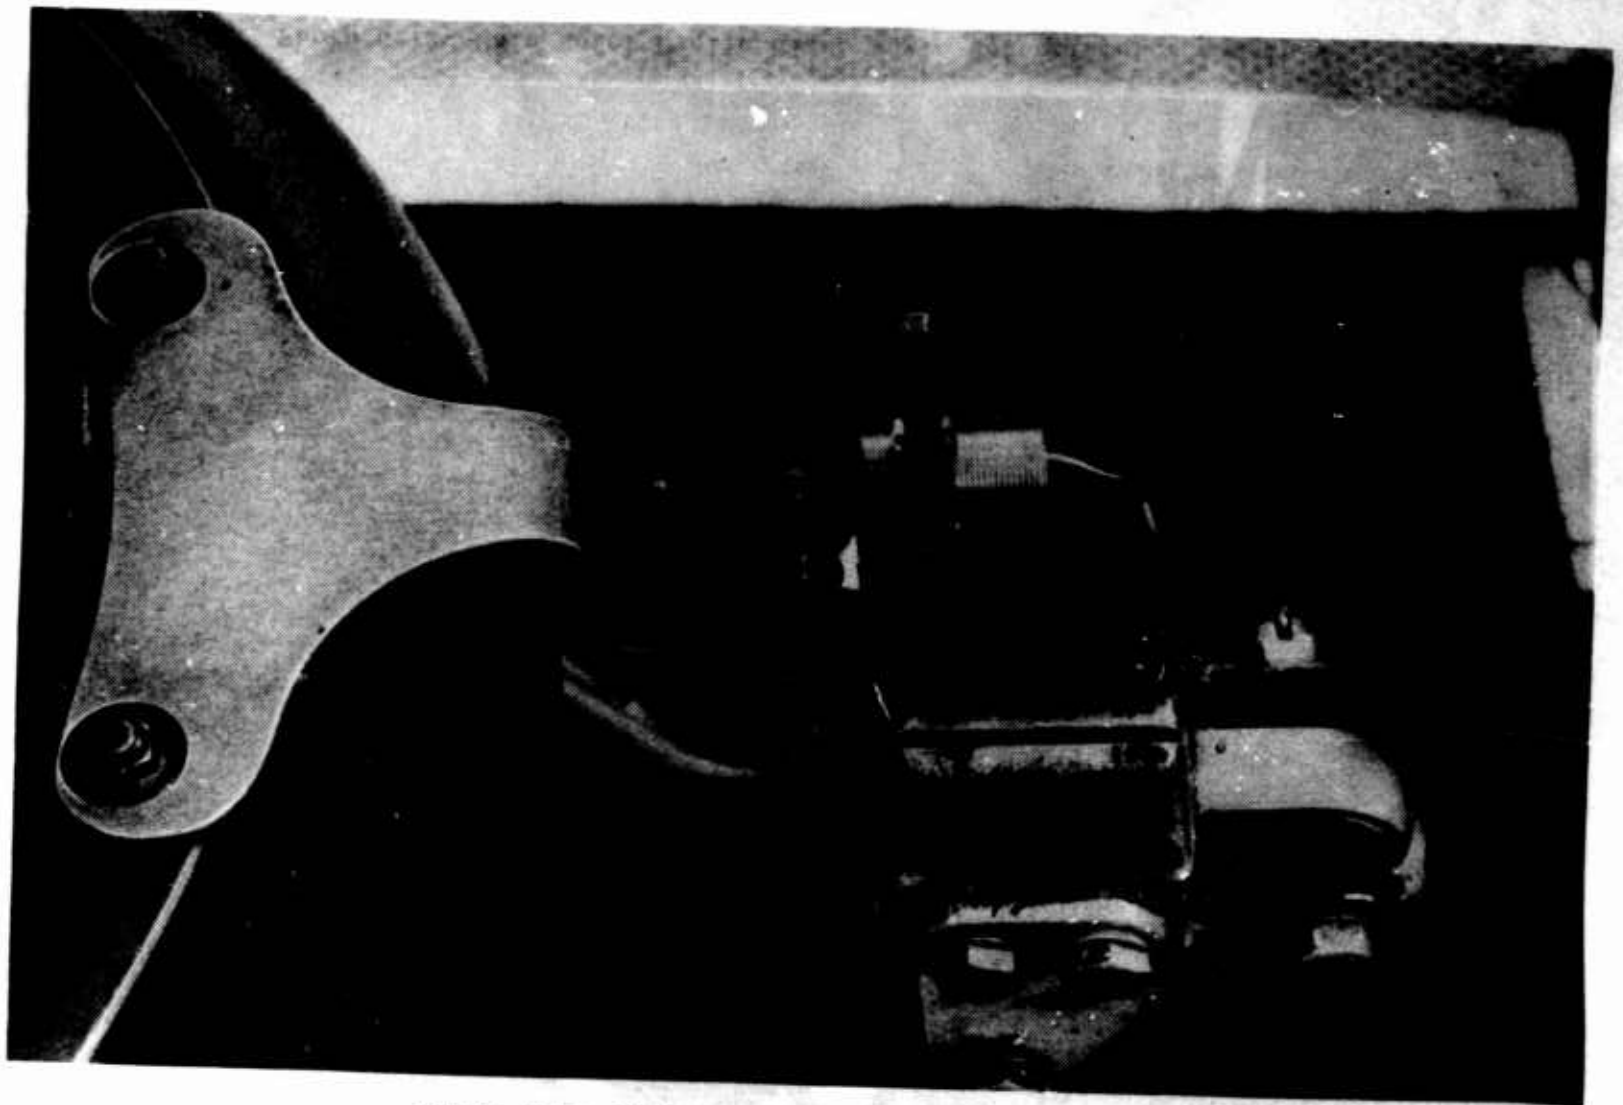


Photo C-11. Main Rotor Index Magnetic Sensor

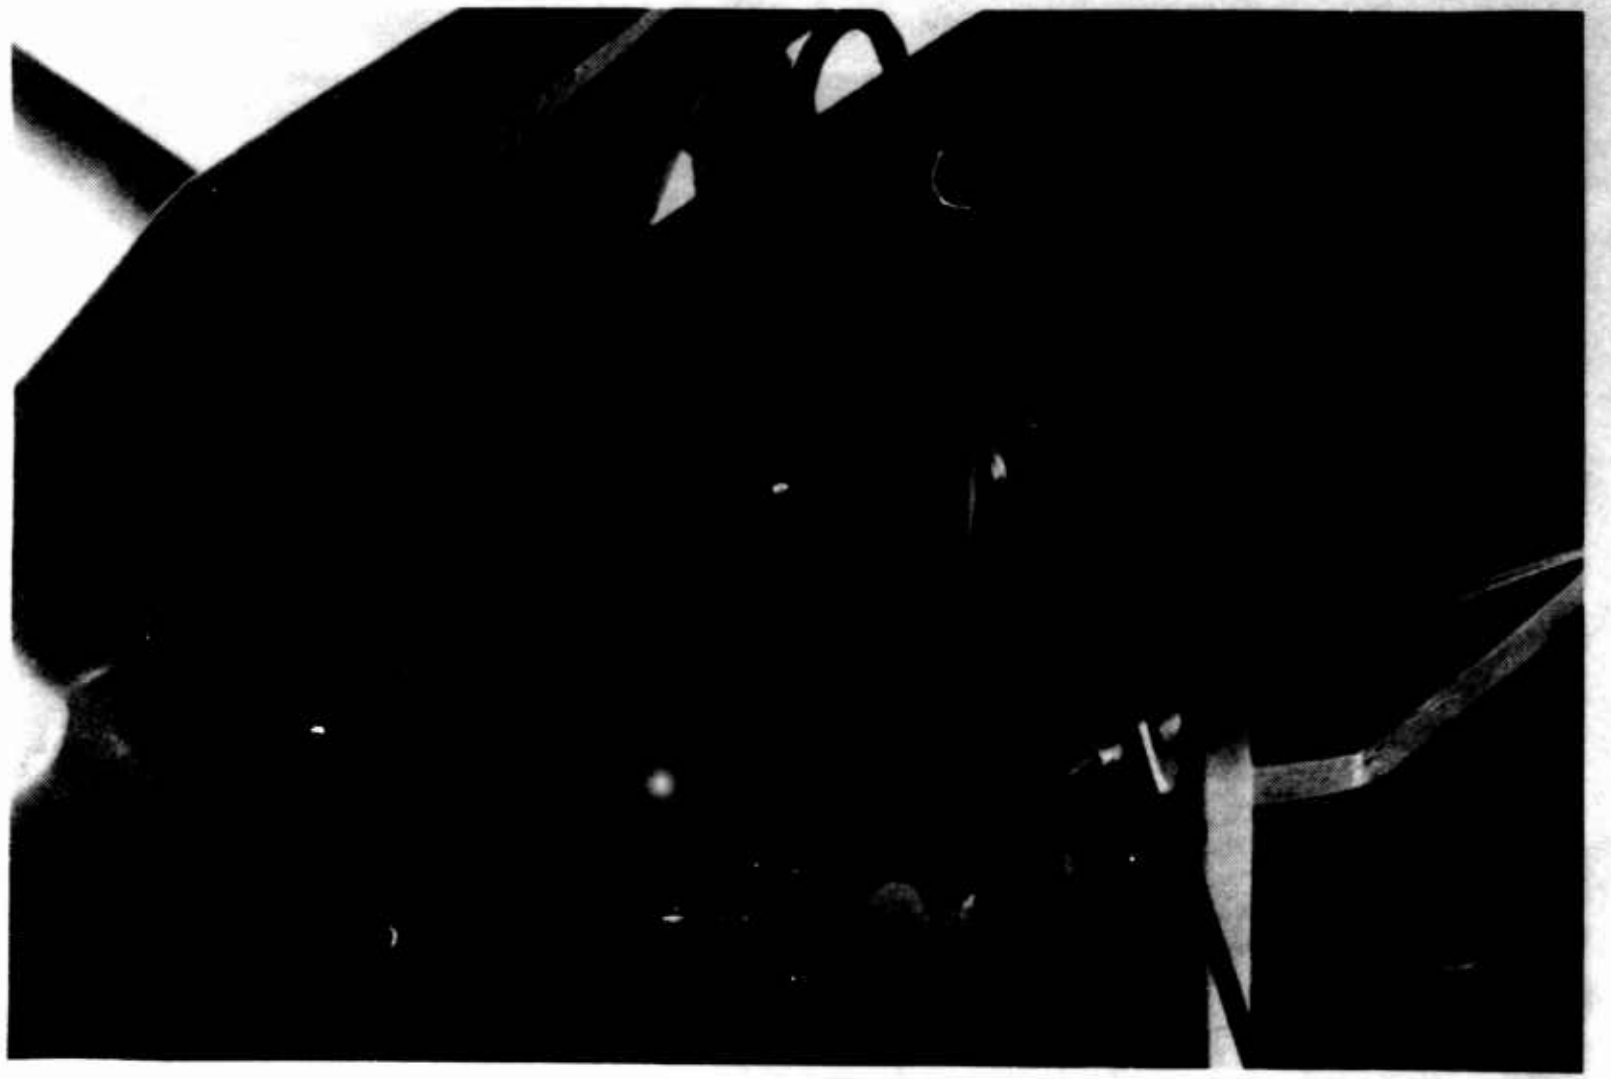


Photo C-12. Main Rotor Cyclic Blade Angle Potentiometer Assembly



Photo C-13. Main Rotor Teeter Angle Geared Potentiometer Mount

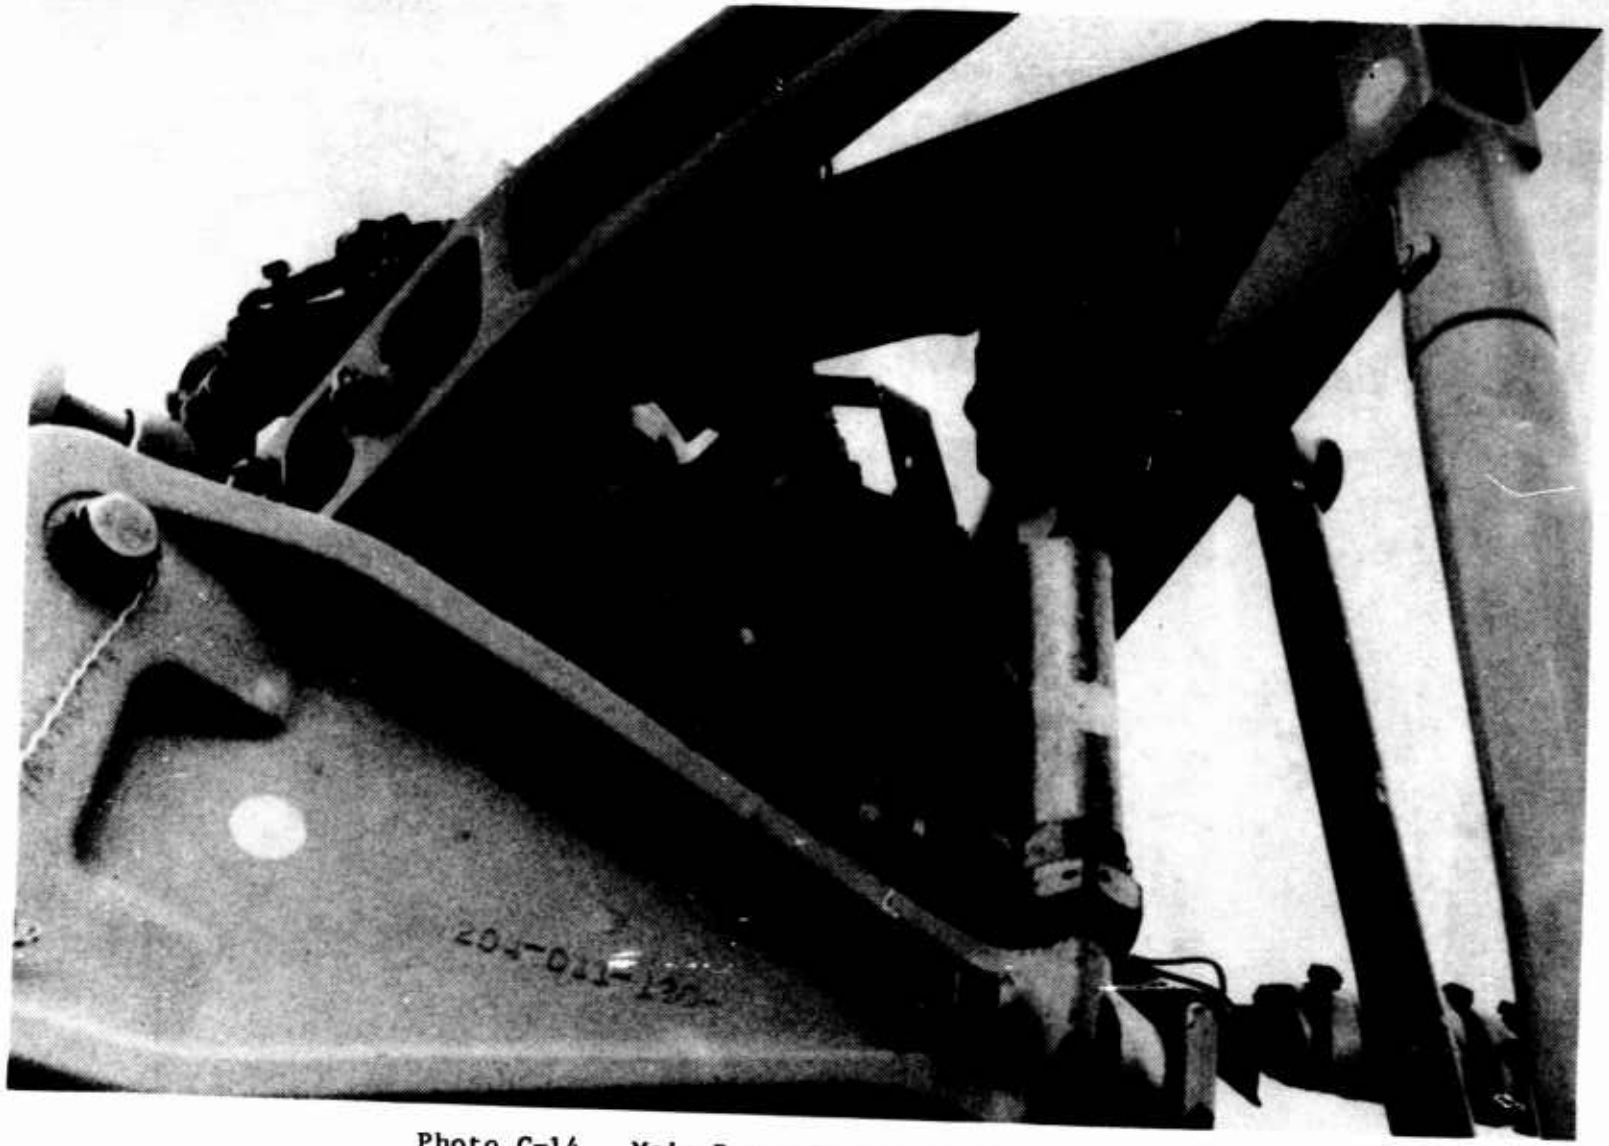


Photo C-14. Main Rotor Teeter Angle Assembly

APPENDIX D. TEST TECHNIQUES AND DATA ANALYSIS METHODS

DATA PROCESSING

1. The majority of data was post-processed on the Real Time Data Acquisition and Processing System (RDAPS) from the onboard analog flight tape. Some data was processed in "real time" via telemetry, primarily to monitor flight limits and confirm target test conditions. Some data were obtained from cockpit indicators. Most of the data presented in this report are average values taken over 30 second data records. All averaged parameters were edited to the slowest sub-frame parameter rate (1/8 main frame rate) so that approximately 1600 samples were averaged for the engineering test points and approximately 500 samples were averaged for the mission flight test points (slower data rate).

MISSION FLIGHT TESTS

2. Mission test flights were designed to simulate actual operational flights as closely as practical. Two mission flights were flown to and from each of three destinations. One leg of each round trip was flown using "Optimum" flight profile and the other using "Normal" flight profile. An operational pilot flew each flight although a test pilot was onboard because of the aircraft "test status". The test pilot managed the data system and communications. Three different flight crews were used. The flights were conducted under Visual Flight Rules (VFR) to minimize significant route or time deviation requirements from ATC facilities.

Flight Conditions

3. Nominal loading was 8100 lb gross weight which represents 1000 lb payload, a crew of two and full fuel, for an operationally configured aircraft. Precise fuel loading was not attempted since this was considered a real operational variable. Therefore, engine start gross weight varied with the actual fuel loading. Nominal mid longitudinal and lateral center of gravity was used. Flight routes were planned as the most direct route considering restricted airspace and terrain suitable for an emergency landing from cruise altitude. Normal flight profile cruise altitudes were approximately 1500 feet above ground level (AGL). Optimum flight profile cruise altitudes were determined from appendix E information adjusted to comply with normal VFR cruise altitudes and not exceed altitudes specified for aircraft without onboard oxygen by AR 95-1. They varied from 7500 to 10,500 feet mean sea level (MSL), depending on weight, rotor rpm, ambient temperature and direction of flight. Normal cruise indicated rotor/engine speeds were 324/6600 rpm. Optimum cruise indicated rotor/engine

speeds were 314/6400 rpm above 7500 lb and 294/ 6000 rpm below 7500 pounds gross weight. Normal cruise airspeeds were at the discretion of the pilot, usually 90 to 100 knots indicated airspeed. Optimum cruise airspeeds were taken from reference 10 and were usually limit airspeed (V_{NE}). This did not allow adjustment for winds as described in appendix E, which would have improved performance. Optimum climb and descent power and airspeed schedules were those described in appendix E.

Instruments and Data Analysis

4. All mission flights were flown solely by reference to standard production indicators without knowledge of their calibrations, with the exception of rotor speed. The sensitive test rotor speed indicator was used to limit minimum rotor speed to the true value. Use of the standard indicator with its known systematic error would have resulted in rotor speeds significantly below the established minimum safe rotor speed limit. Actual performance was determined from the test instrumentation system using the same procedures and analysis methods as used for the engineering data described later in this appendix. An additional computation made for the mission flights was the determination of air distance and average winds for each flight. Air distance was computed by integrating true airspeed over the actual flight time. Average effective headwinds were computed as the difference between average airspeed for the air distance and average ground speed over the planned flight route ground distance. The test aircraft had distance measuring equipment (DME) installed. Accurate ground speed was measured when flying directly to or from a VORTAC ground station within line of sight. Wind speed was calculated from these ground speeds, aircraft track, heading and true airspeeds. Wind speeds obtained from this method generally agreed with the computed average wind speed. DME winds were only available a small percentage of the time, particularly during the low altitude normal flight profile flights.

PERFORMANCE FLIGHT TESTS

5. All performance tests were conducted in stable, nonturbulent atmospheric conditions. Additionally, hover conditions were limited to a maximum of three knots of wind. After the aircraft was stabilized at the desired test condition, data were recorded for 30 seconds. Test conditions were determined from preprogrammed calculator output aboard the test aircraft and for some tests verified using the RDAPS system via telemetry. Test conditions were established and maintained by reference to sensitive calibrated test instruments.

Level Flight Performance Technique

6. The referred rotor speed technique was used for all level flight performance tests. In this technique, rotor speed is varied (decreased) from point to point as temperature varies (decreases) to maintain constant the ratio of rotor speed to absolute air temperature ($N/\sqrt{\theta}$) or referred rotor speed. This results in a constant average rotational tip Mach number (M_{tip}) throughout the flight. As gross weight decreases through fuel use, altitude is increased for each test point to maintain constant the ratio of gross weight to static air pressure (W/δ). This combined with the constant $N/\sqrt{\theta}$, results in a constant thrust coefficient (C_T) for the test. Typical altitude change over a flight was 800 feet and temperature change was 2°C.

7. The main advantage of this technique (compared to the constant rotor speed technique) is that two of the three independent nondimensional parameters, rotational M_{tip} and C_T, are held constant during a test while the third, advance ratio (μ), is varied continuously over the available range. This somewhat simplifies data analysis. The disadvantages are that significantly more planning is required, test condition range is slightly reduced and test productivity is reduced.

8. More general planning is required to determine probable available temperatures in the test region during the test time frame and, therefore, the available nondimensional test condition matrix. For each flight, accurate temperatures over the test altitude range must be known ahead of time. Takeoff weight is adjusted so that the test altitude will result in test temperatures that allow the target referred rotor speed to be maintained within actual rotor speed limits over the flight. An additional complicating factor for the UH-1H is that rotor speed limits are in turn a function of weight. Temperature estimated by using standard temperature lapse rate were completely inadequate and temperatures aloft forecast data were inadequate about half the time. For the cold weather tests, a support aircraft obtained temperature profiles prior to test flights (in support of the icing tests). For the hot weather tests at Edwards AFB, California, sounding ballon data were available daily, approximately two hours prior to the first test flight. Even with this data, a margin had to be allowed for small variations in temperature in the test area and with time of day. These constraints reduced the possible test condition range, reduced the chance for multiple tests on a flight and eliminated alternate tests if air stability was unsuitable at the planned altitude, compared to the constant rotor speed technique.

Hover Performance Technique

9. Limited out-of-ground effect (50 ft skid height) hover performance data were obtained in calm winds (less than 3 knots) to expand the Mach number range of existing data. The free flight technique was used. Skid height was established and maintained by an outside observer relaying the height of a measured, weighted cord. Rotor speed was varied in 5 rpm increments from maximum to minimum and back. After each rpm sweep, ballast was removed in increments of approximately 800 lb. For the hot weather tests at Edwards AFB (2300 ft elevation), maximum weight was limited to 8800 lb by the tail rotor torque limit (105 SHP). For the cold weather tests in Duluth, Minnesota (1400 ft elevation) adequate engine and tail rotor torque margins were available to hover at the 10,000 lb allowed by the airworthiness release (ref 14, app A). Minimum test weight was approximately 6800 lb. The large allowable rotor speed range (10%) of the UH-1H makes the free flight technique relatively productive.

Fuel Quantity

10. A manometer type external sight gauge was calibrated and used to determine fuel volume. With the crashworthy fuel system fuel does not flow freely between the compartments of the two belly fuel cells. Additionally, the system is designed with venturi-type scavenge pumps such that fuel is pumped to fill the compartments containing operating boost pump(s), while emptying the others. Therefore, it takes approximately 15 to 20 minutes for the fuel in all compartments to reach equal levels, after adding or removing fuel or running the boost pump(s). This problem was not encountered if fuel quantity was more than 80 gallons, as the belly cells were completely full and fuel flowed freely between and from the upper (saddle) cells. In conflict with the settling time was the requirement to read the sight gauge quickly (within 30 sec) after filling so the density of the fuel in the gauge was the same as that in the tank. If the ambient temperature was different from the fuel temperature, heat transfer or radiation would change the sight gauge fuel temperature and density. The following procedure was used both for the calibration and for pre and post flight readings: 1) after 20 minutes of settling, 2) fuel was drained through the sight gauge so its body temperature was approximately that of the fuel, 3) the sight gauge was remounted and read within 30 seconds, 4) fuel density (using a hydrometer) and temperature were measured to determine fuel weight and correct density for fuel temperature change throughout each flight.

11. The sight gauge calibration, using this procedure, resulted in a fuel capacity to the filler lip of 207.2 gallons (from drained condition) or 205.7 useable gallons. The capacity and sight gauge calibration were verified within one pound by weighing the aircraft with full and drained fuel. This capacity differs slightly from that reported in reference 3, appendix A (208.5 gallons). The capacity and sight gauge calibration (above 80 gallons) were insensitive to longitudinal attitude as both the filler and sight gauge were near the longitudinal center of the upper (saddle) tanks. The capacity and sight gauge were sensitive to lateral attitude. Approximately one inch of sight gauge reading and 4.9 gallons of capacity were added per degree of left side low attitude (filler and sight gauge are on right side). A two degree nose up and zero lateral reference attitude were used for the calibration and flight readings. This attitude could be obtained on most ground surfaces using only the ground handling wheels for leveling. During the sight gauge calibration, both fuel volume used and flow rate instrumentation calibrations were verified and the standard production quantity gauge was calibrated. Fuel lateral cg was assumed zero as equal sized cells are arranged symmetricaly about the centerline. Fuel vertical cg was derived from the sight gauge calibration. A previously determined longitudinal cg versus volume remaining was verified by weighings for this test. It differs slightly from that of reference 10.

12. Fuel weight remaining and fuel cg for each test point were determined as follows: initial fuel volume was determined from the sight gauge calibration. Engine start fuel weight was initial fuel volume times initial fuel density. Fuel density on each succeeding test point was corrected for temperature change from initial density and temperature by the factor -0.00657 lb/gal/°C, obtained from MIL-J-5624 and verified with test data. This function is valid for JP-4, JP-5 and Jet A. Incremental fuel weight used was the measured incremental volume used multiplied by the current density. Fuel weight remaining was initial weight minus the summation of incremental fuel weights used. Fuel volume remaining was weight remaining divided by current density. Fuel cg for each test point was determined from the remaining fuel volume. Not correcting fuel density for temperature change would have resulted in weight errors as large as 60 lb based on initial density or 25 lb if average pre-flight and post-flight densities were used. The worst case was when fuel had warmed in a heated hangar over night (25-30°C) and the flight was in cold temperatures (-30°C). Calculated fuel used in flight was cross checked by pre- and post-flight sight gauge readings, the calibrated standard production quantity gauge and fuel added from the fuel truck.

Weight and Balance

13. Prior to testing, the aircraft empty weight (including full oil and undrainable fuel) and horizontal cg location were determined with calibrated scales. The aircraft was reweighed whenever significant configuration changes (such as the engine change) were made. Vertical cg was determined by suspending the helicopter from the top of the rotor mast and measuring the resulting attitude. Vertical cg was then calculated from the intersection of a vertical line from the suspension point with a line normal to the water line through the horizontal cg. Initial attempts to determine the vertical cg at different attitudes (varied by moving ballast) were inconsistent by several inches. The major error source was found to be transmission deflection as varying moments were applied to the transmission mounts. Correcting for mast angle (which changed by more than one degree) resulted in consistent calculated vertical cg's. A byproduct of this exercise was determination of an approximate transmission mount stiffness value of 100,000 inch-pounds/degree deflection. The transmission and mast were assumed to pivot rigidly about fuselage station (FS) 140.249, buttline (BL) 0.0, and waterline (WL) 59.433. The latest empty weight and balance determination was empty weight of 6024 lb at a cg of FS 142.887, BL 0.005, and WL 67.194.

14. The rotor system weight including hub, blades and instrumentation was 770 lb. It was assumed centered at the teeter pivot; FS 133.048, BL 0.0 and WL 141.744 (with a 5.0 degree forward mast inclination). Subtracting this results in an (empty) fuselage weight and balance of 5254 lb at FS 144.329, BL 0.006 and WL 56.268. This is not representative of an operational aircraft as it includes approximately 900 lb of instrumentation distributed throughout the aircraft.

15. Ballast was installed at various locations to achieve the desired weight and cg for each test. The gross weight for each test point was calculated by summing empty weight, crew and equipment weight, ballast weight, and fuel remaining weight. The gross weight and balance data presented on each data figure (app F) are the average for all test points on the figure.

Nondimensional Analysis

16. Where possible, the measured test data were reduced to nondimensional parameters for analysis. Air data parameters were nondimensionalized by dividing by the sea level standard values of temperature, pressure, density and sound speed. This simplifies expressions containing air data information and allows easy con-

version to or from any desired unit of measure. For helicopter performance parameters, the six independent dimensional parameters; weight, altitude, temperature, humidity, rotor speed and airspeed; are reduced to three nondimensional parameters; thrust coefficient (C_T), advance ratio (μ) and average tip Mach number (M_{tip}). The dependent variable, shaft horsepower, is nondimensionalized as power coefficient (C_P). The reduction in number of parameters simplifies analysis.

17. The nondimensional analysis approach is being extended to characterize helicopter performance similar to that outlined in reference 28, appendix A. An expression to characterize compressibility (Mach number) effects has been successfully developed and independently verified (ref 27) that corrects UH-1H test data to a unique incompressible baseline. Data for any desired compressibility condition can be directly determined using the compressibility expression and baseline data; within the linear C_T range (up to $C_T = 0.0040$).

18. The following nondimensional parameters were used to process and analyze the UH-1H performance data:

Coefficient of power (C_P):

$$C_P \equiv \frac{550\ SHP}{\rho A(\Omega R)^3} = \frac{64,138,310}{BR^5}\frac{SHP}{\sigma N^3} = 8.05492\frac{SHP}{\sigma N^3} = 8.05492\frac{(SHP/\delta\sqrt{\theta})}{(N/\sqrt{\theta})^3} \quad (1)$$

Coefficient of torque (C_Q):

$$C_Q \equiv \frac{Q}{\rho AR(\Omega R)^2} = \frac{12,211.91}{BR^5}\frac{Q}{\sigma N^2} = 0.00153365\frac{Q}{\sigma N^2} = 0.00153365\frac{(Q/\delta)}{(N/\sqrt{\theta})^2} \quad (2)$$

Coefficient of thrust (weight)(C_T):

$$C_T \equiv \frac{W}{\rho A(\Omega R)^2} = \frac{12,211.91}{BR^4}\frac{W}{\sigma N^2} = 0.0368077\frac{W}{\sigma N^2} = 0.0368077\frac{(W/\delta)}{(N/\sqrt{\theta})^2} \quad (3)$$

Advance ratio (μ):

$$\mu \equiv \frac{1.68781\ V_T}{\Omega R} = \frac{16.11740}{R}\frac{V_T}{N} = 0.671558\frac{V_T}{N} = 0.671558\frac{(V_T/\sqrt{\theta})}{(N/\sqrt{\theta})} \quad (4)$$

Average rotor tip Mach number (M_{tip}):

$$M_{tip} \equiv \frac{\Omega R}{a} = 9.379708 \times 10^{-5} R\ N/\sqrt{\theta} = 0.00225113\ N/\sqrt{\theta} \quad (5)$$

Advancing blade tip Mach number (M_{AT}):

$$M_{AT} = (1+\mu)\ M_{tip} = 0.00225113\ (1+\mu)\ N/\sqrt{\theta} \quad (6)$$

Effective lift over drag (L/D):

$$L/D = \frac{W \times 1.68781 V_T}{550\ SHP} = \frac{W \times V_T}{325.866\ SHP} = \frac{\mu\ C_T}{C_P} \quad (7)$$

Where:

550 = Conversion factor (ft-lb/sec/shp)
SHP = Shaft horsepower
ρ = Air density (slug/ft^3)
ρ_o = Standard sea level air density (slug/ft^3) = .002376892
σ = Air density ratio = ρ / ρ_o
δ = Air pressure ratio (test to sea level standard, 29.92125 in.Hg)
θ = (T + 273.15)/288.15
T = Ambient air temperature (°C)
A = Main rotor disc area (ft^2) = 1809.56
Ω = Main rotor angular velocity (radian/sec) = $\frac{2\pi}{60} \times N$
N = Main rotor angular velocity (rpm)
R = Main rotor radius (ft) = 24.0
B = Number of lifting rotors = 1
Q = Main rotor torque (ft-lb)
W = Gross weight (lb)
1.68781 = Conversion factor (ft/sec/knot)
V_T = True airspeed (knot)
a = Speed of sound (ft/sec) = 1116.45 $\sqrt{\theta}$

POWER

19. Shaft power was computed using the following equation:

$$SHP = \frac{2\pi \times N \times Q}{33{,}000} = \frac{N \times Q}{5252.113} \qquad (8)$$

Where:

N = Rotational speed (rpm)
Q = Shaft torque (ft-lb)
33,000 = Conversion factor (ft-lb/min/shp)

Engine output shaft speed and main rotor speed were measured directly. Tail rotor speed was calculated from main rotor speed by the ratio 5.108243:1. Main rotor and tail rotor shaft torques were measured directly (by strain gages). Engine torque was determined using the integral production hydro-mechanical torque sensing system which provides a differential oil pressure signal proportional to the output shaft torque. The relationship between pressure and torque for each engine was determined from an engine test cell calibration. Torque calibration data are shown in figures C-1 (T53-L-13B) and C-2 (T53-L-703) in appendix C.

The T53-L-13B torque calibration was:

$$Q \text{ (ft-lb)} = -18.92401 + 19.06214\ \Delta P \text{ (PSI)} \qquad (9)$$

The T53-L-703 torque calibration used for data analysis was:

$$Q \text{ (ft-lb)} = -26.07868 + 18.74986\ \Delta P \text{ (PSI)} \qquad (10)$$

20. There was a significant discrepancy between the power measured by the two engines at the same flight conditions. The T53-L-703 engine torque calibration is suspect. The difference between engine power and the sum of rotor powers was much larger for the 703 engine than the 13B engine. The 13B engine and torque calibration were the same used for the reference 3, appendix A tests. These data compared well with historic UH-1H data (ref 15). The drive train losses derived from rotor powers and 13B engine power agreed well with Bell estimates and classical engineering gear train analysis methods (discussed in the following paragraph). The proportional drive train losses derived using the 703 test cell torque calibration were approximately 3 times too large (5 percent of total power). There is no known reason why the helicopter drive train power requirements should be different for the two different engine models. Therefore, a revised torque

calibration for the 703 engine was derived based on the drive train losses determined with 13B engine data. This derived calibration falls between the engine calibration data and the engine acceptance (green run) data obtained in the same time frame. The 703 engine was recalibrated following USAAEFA Project No. 84-25. Preliminary results substantiate this analytically determined calibration. The data presented in this report are based on the derived calibration.

Drive Train Losses

21. Drive train, transmission and accessory losses were computed by comparing the rotor shaft power sum with engine output shaft power. Since there were several apparent discrepancies with the T53-L-703 engine power derived with the test cell torque calibration; T53-L-13 engine power test data was used to determine drive system losses. From these losses and test data, a new T53-L-703 engine torque calibration was derived that was consistent with T53-L-13 power data. The sum of rotor powers compared to engine power was:

$$SHP_{ENG} = LOSS_{FIXED} + \frac{SHP_{MPT}}{\eta_{MPT}} = 11.3 + \frac{SHP_{MPT}}{0.98533} \qquad (11)$$

Where:

SHP_{ENG} = Engine output power (SHP)
$LOSS_{FIXED}$ = Sum of fixed accessory and drive losses (SHP)
η_{MPT} = Proportional loss of main plus tail rotor drive
SHP_{MPT} = Sum of measured main plus tail rotor power (SHP)

T53-L-13 total drive train loss data are shown in figure 57, appendix F.

22. The transmission efficiencies were estimated in reference 28 by adding the losses for each gear mesh. Typical losses for each type of gear mesh have been determined as:

Spiral bevel mesh	0.35%
Helical mesh	0.40%
Planetary stage	0.40%

Therefore, for the main rotor drive train of the UH-1H, the efficiency reduction is

One spiral bevel	(1) (0.0035)	= 0.0035
Two planetary stages	= (2) (0.004)	= 0.0080
		0.0115

which gives a main rotor transmission nominal efficiency (η_{MN}) of 0.9885. Similarly, for the tail rotor drive system,

One helical stage	= (1) (0.0040)	= 0.004
Four spiral bevel	= (4) (0.0035)	= 0.014
		0.018

for a tail rotor transmission nominal efficiency (η_{TN}) of 0.982. Both Bell transmission stand tests and reference 30 tests substantiated these values. A small correction was made to these nominal main and tail drive efficiencies. The correction was made by determining a ratio, R, of the differences between nominal and test efficiencies weighted by the ratio of main and tail rotor power. Except for the very low speed, tail rotor power was approximately a constant 4% of main rotor power, so that:

$$SHP_{MPT} = SHP_M + SHP_T = 1.04\ SHP_M \tag{12}$$

and

$$SHP_{ENG} - LOSS_{FIXED} = \frac{SHP_{MPT}}{\eta_{MPT}} = \frac{SHP_M}{\eta_M} + \frac{SHP_T}{\eta_T} \tag{13}$$

$$= \frac{SHP_M}{R\eta_{MN}} + \frac{SHP_T}{R\eta_{TN}}$$

combining (12) and (13) gives:

$$1.04\ SHP_M/\eta_{MPT} = SHP_M/R\eta_{MN} + 0.04\ SHP_M/R\eta_{TN} \tag{14}$$

simplifying and solving for R gives:

$$R = \frac{1/\eta_{MN} + 0.04/\eta_{TN}}{1.04/\eta_{MPT}} = 0.997047 \tag{15}$$

substituting values for η_{MN}, η_{TN} and η_{MPT} in (13) gives:

$\eta_M = 0.98558$

$\eta_T = 0.97910$

Therefore, the final power division was:

$$SHP_{ENG} = 11.3 + \frac{SHP_M}{0.98558} + \frac{SHP_T}{0.97910} \qquad (16)$$

This equation was used to derive corrected engine power for all T53-L-703 engine data. Comparing the corrected power with the original engine calibration torque data (using equation 8) gave a relationship to derive a revised torquemeter calibration such that equation 16 held true for all data. Both corrected and uncorrected T53-L-703 power data is shown in figure 58, appendix F. Main rotor power calculated from equation (16) is compared to measured power in figure 59. Tail rotor power calculated from equation (16) is compared to measured power in figure 60.

23. While the proportional drive train loss agreed well with the nominal estimates and test stand values, the fixed losses (11.3 SHP) were substantially less than the (conservative) estimates (15.2 to 31 SHP) of references 29 and 30. The only fixed loss measured was the main generator load which was 0.2 load meter x 300 amp rating = 60 at 28 volts during data recording. Using the stated generator efficiency of 60% gives:

$$SHP_{GEN} = \frac{60 \text{ amps} \times 28 \text{ volts}}{0.6 \times 745.7 \text{ watts/horsepower}} = 3.8 \text{ SHP} \qquad (17)$$

Airspeed Calibration

24. Position and probe error of both the test airspeed systems and the production airspeed system were determined using the trailing bomb method. A few points were checked using the altitude depression method to differentiate production system static source error from net error. Two test probes were used during these tests. Normally a swiveling pitot-static probe mounted on a boom extending 92 inches in front of the aircraft was used. For the cold weather tests, a fixed heated probe replaced the swiveling probe to permit concurrent icing tests. The test probe position error data, in terms of knots, are presented in figures C3 and C4, appendix C. For data processing, the calibration was used in terms of pressure (the actual measurement). The following equations were determined and used:

Test Swiveling Probe (18)

$$\Delta Q_c = 0.00967855 + 0.121957\ Q_{ic} + 0.032295\ Q_{ic}^2 + 0.160413\ Q_{ic}^3$$

Test Fixed Probe (19)

$$\Delta Q_c = 0.0062556 + 0.184425\ Q_{ic} - 0.158159\ Q_{ic}^2 + 0.103634\ Q_{ic}^3$$

Where:

ΔQ_c = net pitot-static pressure error (in.Hg)

Q_{ic} = instrument corrected (measured) dynamic pressure (in.Hg)

Air Data

25. Calibrated dynamic pressure, Q_c, was determined by adding the position error ΔQ_c to the measured dynamic pressure, Q_{ic}.

$$Q_c = Q_{ic} + \Delta Q_c \tag{20}$$

Static pressure was determined by assuming all pitot-static error was static error. Therefore, static pressure, P_c was determined by subtracting position error ΔQ_c from measured static pressure P_{ic}:

$$P_c = P_{ic} - \Delta Q_c \tag{21}$$

The few altitude depression points taken during the production static system calibration (fig. C6) showed that the test total probe error was no more than 1 knot and no more than 10 feet of pressure altitude.

26. These parameters (Q_{ic}, Q_c and P_c) plus measured ram air temperature (T_{ic}), temperature probe recovery factor (K_t = 0.97) and dew point temperature (T_d) were used in the International Standard Atmosphere (ISA) relationships on the following page, to compute these air data parameters:

Static air temperature, T
Temperature ratio, θ
Temperature ratio, θ' (corrected for humidity)
Static pressure ratio, δ
Pressure altitude, H_p
Air density, ρ (corrected for humidity)
Air density ratio, σ (corrected for humidity)
Density altitude, H_d (corrected for humidity)
Sound speed, a (corrected for humidity)
Instrument corrected airspeed, V_{ic}
Calibrated airspeed, V_{cal}
True airspeed, V_t (corrected for humidity)

SYNOPSIS OF INTERNATIONAL STANDARD TROPOSPHERE FOR SUBSONIC AIR DATA

1976 U.S. Standard Atmosphere adopted by ICAO to 32 km and ISO to 50 km
Tropopause = 11km geopotential(36,089.24ft) T =216.65°K(-56.5°C) to 20km
Presumes "ideal diatomic gas" $\rho = mP/R^*T$ $a = \sqrt{\gamma TR^*/m}$ $\gamma = 1.4$ (exact)
Presumes dry air (no liquid or water vapor) $m = 28.9644$ to 100 km

Ref 1 Sea Level Properties	Ref 1 English Units	Converted SI Units USE - Customary Units
$R^* = 8314.32$ joule/kgmol°K	1545.31ftlb/lbmol°R	
$dT/dH = -6.5$°K/km to 11 km	-.00356616 °R/ft	-.0019812°K/ft or°C/ft
$T_o = 288.15$°K	518.67°R = 59°F	288.15°K (15.°C exact)
$P_o = 101,325.$ N/m^2	2116.22 lbf/ft^2	29.92125 in.Hg at 0°C
$\rho_o = 1.22500$ kg/m^3	.076474 lbm/ft^3	.002376892 slug/ft^3
$a_o = 340.294$ m/sec	1116.45 ft/sec	661.4786 knots
$\mu_o = 1.7894 \times 10^{-5}$kg/m-sec	1.2024×10^{-5}lbm/ftsec	3.73724×10^{-7}slug/ftsec
$g_o = 9.80665$ m/sec^2	32.1741 ft/sec^2	32.17405 ft/sec^2

STANDARD ATMOSPHERE TROPOSPHERE EQUATIONS (Dry Air), Customary Units

$\theta \equiv T/T_o = (T°C+273.15)/288.15$ $\quad \theta_s \equiv T_s/T_o = 1-6.875586 \times 10^{-6} H,ft = \delta^{.1902632}$

$T°C = 288.15\ \theta - 273.15$

$\delta \equiv P/P_o = P,in.hg/29.92125 = (1 - 6.875586 \times 10^{-6} H_p)^{5.255876}$

$P,in.Hg = 29.92125\ \delta$

$H_p,ft = 145,442.2(1 - \delta^{.1902632}) = 145,442.2[1 - (P/29.92125)^{.1902632}]$

$\sigma \equiv \rho/\rho_o = 420.7175\rho = \delta/\theta = 9.630279P/T = (288.15/T)(1-H_p/145,442.2)^{5.255876}$

$\rho,slug/ft^3 = .002376892\sigma = .02289013P/T = .002376892(1-H_d/145,442.2)^{4.255876}$

$H_d,ft = 145,442.2(1 - \sigma^{.2349692}) = 145,422.2[1 - (420.7175\ \rho)^{.2349692}]$

$\mu,slug/ftsec$ or $lbfsec/ft^2 = 3.0451 \times 10^{-8} T^{1.5}/(T + 110.4)$ $\quad \upsilon,ft^2/sec = \mu/\rho$

$Z = (R_o \times H)/[R_o(g_{sl}/g_o)-H] = 20,855,532\ H/[(20,855,532\ g_{sl}/32.17405) - H]$

$dZ/dt = (T/T_s)\frac{dH_p}{dt} = (\theta/\theta_s)\frac{dH_p}{dt} = (\theta/\delta^{.1902632})\frac{dH_p}{dt}$ non-standard atmosphere

HUMIDITY CORRECTIONS FOR DENSITY AND SOUNDSPEED (ref 2 and 3)

Vapor Pressure: $Pv,in.Hg = e^{(69.5137 - 7246.6/T + .0057449\ T - 8.2471nT)}$
For existing vapor pressure, Pv_d, use absolute dewpoint temperature, T_d°K
For saturation vapor pressure, Pv_s, use absolute static temperature, T°K

For liquid wet bulb, $Pv_d = Pv_s - P(6.606 \times 10^{-4} + 7.569 \times 10^{-7}\ T_{wb}°C)(T - T_{wb})$

For iced wet bulb, $Pv_d = Pv_s - P(5.826 \times 10^{-4} + 6.676 \times 10^{-7}\ T_{wb}°C)(T - T_{wb})$

Relative Humidity: RH,% $\equiv 100 \times Pv_d/Pv_s$ Note: $T_d < T_{wb} < T$ $\quad Pv_d < Pv_s$

Specific Humidity: mass of water vapor/mass of mixture, $SH = .62201\ Pv_d/P$

Mixing Ratio: mass of water vapor/mass of dry air, $r = .62201\ Pv_d/(P-Pv_d)$

Density Correction, $K_d = 1 - .37799\ Pv_d/P$ $\quad \sigma_{wet} = K_d \times \sigma_{dry}$ $\quad .96 < K_d < 1.0$

Soundspeed Correction, $K_a = \sqrt{(1 + 1.8375\ r)/K_d(1 + 1.9357\ r)}$ $\quad 1. < K_a < 1.02$

Pseudo T' or $\theta' = (T \text{ or } \theta) \times K_d^2$ such that $K_n\sqrt{T'} = a_{wet}$ $\quad a_{wet} = K_a \times a_{dry}$

COMPRESSIBLE SUBSONIC (Isentropic) AIRSPEED EQUATIONS

$V = a_o\sqrt{5K_v[(Q/P + 1)^{2/7} - 1]}$ $\quad$ -inverted- $\quad Q/P = [(V/a_o)^2/5K_v + 1]^{3.5} - 1$

For V_{ic}: $K_v = 1$, $Q = Q_{ic}$, $P = P_o$ $\quad$ For V_e: $K_v = \delta$, $Q = Q_c$, $P = P_c$

For V_{cal}: $K_v = 1$, $Q = Q_c$, $P = P_o$ $\quad$ For V_t: $K_v = \delta'$, $Q = Q_c$, $P = P_c$

Use any Units desired with V/a and Q/P ratios nondimensional

$a,knots = K_n\sqrt{T} = 38.96785\sqrt{T_{sat}°C+273.15} = a_o\sqrt{\theta} \quad K_n \equiv a/\sqrt{T} = a_o/\sqrt{T_o} = 38.96785$

$T_{sat}°K = T_{ic}°K/(1 + K_t[(Q_c/P_c + 1)^{2/7} - 1])$ $\quad K_t \equiv 5(T_{ic}/T_{sat} - 1)/M_t^2 < 1$

$T_{sat} = T_{ic} - K_t V_e^2/7592.467 = T_{ic}/(1 + K_t V_e^2/73,118 P_c) = T_{ic}/(1 + K_t V_{cal}^2/73,118 P_c)$

Equivalent (incompressible) airspeed, $V_e \equiv V_t\sqrt{\sigma} = V_{cal}$ (low or slow)

DEFINITION OF SYMBOLS AND ABBREVIATIONS USED ON ISA SYNOPSIS

a Speed of sound in air, knots
e Base of napierian (natural) logarithm = 2.718281828459045...
g Net acceleration of gravity; 45° latitude std.=9.80665, meter/second^2
H Geopotential height or altitude above reference (sea level), feet
K Constant, defined by subscript and context
M Mach number, ratio, airspeed / speed of sound
m Molecular weight, atomic number in mass units, carbon 12 scale basis
P Absolute static air pressure, inch of mercury at zero degree Celsius
Pv Partial pressure of water vapor, in.Hg @ 0°C
Q Differential dynamic pressure caused by relative speed, in.Hg @ 0°C
r Mixing Ratio, ratio, mass of water vapor / mass of dry air
R* Universal gas constant, defined as 8314.32 joule/kg-mol°K (Ref 1)
Ro Radius of earth, standard value = 6,356,766 meters = 20,855,532 feet
RH Relative Humidity, ratio, existing vapor press./saturation vapor press.
SH Specific Humidity, ratio, mass of water vapor / mass of air mixture
T Absolute static air temperature, °Kelvin
t Time
V Relative airspeed, knots
Z Geometric (tapeline) altitude above reference (sea level), feet
γ Gamma, Ratio of specific heats, const.press.(.2398)/const.volume(.1713)
δ Delta, Ratio, existing static air pressure/ sea level standard pressure
θ Theta, Ratio, absolute static air temperature/ sea level standard temp.
μ Mu, Dynamic (absolute) viscosity of air, slug/foot-second = lbf-sec/ft^2
υ Nu, Kinematic viscosity of air, feet^2/second
ρ Rho, Air density, slug/feet^3
σ Sigma, Ratio, existing air density / sea level standard air density

SUBSCRIPTS

o(zero) Defined sea level standard condition
c,cal Corrected for compressibility and position error
d Density reference as in H_d; existing dewpoint as in T_d, Pv_d
dry Value computed assuming dry air
e Equivalent (airspeed), value computed assuming incompressible air
ic Instrument corrected
p Pressure reference as in H_p
s Standard value at otherwise existing conditions; saturation cond.
sl Sea Level, zero on all altitude scales
sat Value corrected to existing "static" conditions
t Computed "true" value
wb Wet Bulb (temperature)
wet Value corrected for humidity

SOME USEFUL CONVERSIONS

P, in.Hg = 2.036020434 P, psi $\quad$ P, psi = .4911542062 P, in.Hg @ 0°C
V, knots = .5924838013 V, ft/sec $\quad$ V, ft/sec = 1.687809857 V, knots
T°C = (5/9)(T°F +40) - 40 = T°K -273.15 $\quad$ T°F = (9/5)(T°C +40) - 40 = T°R -459.67

ALTERNATE UNITS FOR SEA LEVEL CONSTANTS

Speed of Sound, SL Standard - a_o	Static Air Pressure, SL Standard - P_o
340.294 m/sec Primary (SI)	101,325. N/m^2 (Pascals) Primary (SI)
1225.058 km/hr	1013.25 millibars
661.4786 nmi/hr - knots Customary	29.92125 in.Hg @ 0°C Customary
1116.450 ft/sec	407.8935 in.H_2O @ 60°F
761.2160 mi/hr - MPH	760.000 mm Hg @ 0°C
2.348782 x 10^{12} cubits/century	2116.217 lbf/ft^2 - PSF
1.135096 x 10^{-6} light years/year	14.69595 lbf/in^2 - PSI

ISA SYNOPSIS REFERENCES

1. U.S. Standard Atmosphere, NOAA, NASA, and USAF, Dec 1962 and Oct 1976
2. Air Density and Helicopter Lift, NBS 10882, Frank Jones, Jan 1973
3. "Humidity Equations," NASA TN D-8401, O. Parish and T. Putnam, Jan 1977
4. SI Units, Constants and Conversion Factors, NASA SP-7012, 2nd Rev 1973

Compiled by Floyd Dominick, Composed by Sheila Lewis USAAEFA TN 80-95

ENGINE PERFORMANCE

27. Engine parameters for both engine models were recorded throughout these tests. The parameters include output shaft torque, fuel flow rate, output shaft speed, gas generator speed, and measured gas temperature (exhaust gas temperature for the T53-L-13B and turbine gas temperature for the T53-L-703). The engine performance was analyzed and is summarized in appendix F using the referred method.

Inlet Conditions

28. Inlet temperature was determined by adding inlet temperature rise (3°C) to measured ambient static temperature. Inlet pressure was determined by multiplying measured ambient static pressure by inlet pressure (loss) ratio obtained from reference 15, appendix A.

Referred Parameters

29. The inlet temperature and pressure ratio exponents used to refer engine data in this report are values obtained from the engine manufacturer. The referred parameters used are defined as follows:

Referred power

$$SHP_{REF} = SHP/(\delta_2 \times \theta_2^{.587}) \quad (22)$$

Referred fuel flow

$$WF_{REF} = WF/(\delta_2 \times \theta_2^{.712}) \quad (23)$$

Referred measured gas temperature

$$MGT_{REF} = (MGT,°C + 273.15)/\theta_2^{1.022} - 273.15 \quad (24)$$

Referred gas producer speed

$$NG_{REF} = NG/\theta_2^{.50} \quad (25)$$

Referred power turbine speed

$$NP_{REF} = NP/\theta_2^{.50} \quad (26)$$

Engine Efficiency

30. Engine efficiency is defined as the measured engine power output divided by the product of fuel energy content times flow rate.

$$\eta_{ENG} = \frac{2544 \times SHP}{18{,}400 \times WF} = \frac{0.1383 \times SHP}{WF} = \frac{0.1383}{SFC} \qquad (27)$$

where:

2544 = conversion factor (BTU/horsepower-hr)
SHP = engine power output (horsepower)
18,400 = JP-4 minimum fuel heating value (BTU/lb)
WF = fuel flow rate (lb/hr)
SFC = Specific fuel consumption (lb/shp-hr)

Engine efficiency multiplied by helicopter effective lift over drag is used as a measure of overall vehicle efficiency. This parameter is presented on both the mission flight performance figures and the nondimensional level flight performance figures in appendix F. Flight conditions that maximize this parameter will result in minimum fuel consumption for a given range.

APPENDIX E. PROTOTYPE OPTIMUM CRUISE CHARTS AND SUPPLEMENTAL NOTES

PROTOTYPE
OPTIMUM CRUISE CHARTS

Section 8

Chapter 7

AIRCRAFT OPERATOR'S MANUALS

SECTION VIII OPTIMUM CRUISE

7-XX DESCRIPTION

This section presents information to determine the altitude and rotor speed for maximum range and maximum endurance. Sheet 1 presents best range altitude and gain in range for 314/6400 RPM. Sheet 2 presents best range altitude, gain in range and fuel flow data for 294/6000 RPM. Sheet 3 shows best endurance data. Airspeed, torque and base line fuel flow are obtained from the cruise charts at the selected altitude and temperature.

7-XX Rotor/Engine Speed Considerations

Optimum cruise rotor/engine speed is always at or below minimum allowable rotor speed: 314/6400 RPM above 7500 lb and 294/6000 RPM below 7500 lb.

NOTE

Use 324 rotor / 6600 engine RPM below 40 knots or 500 feet AGL for maximum directional control.

The use of 294 RPM during cruise will substantially reduce fuel flow and will lower optimum altitude approximately 2000 feet compared to 314 RPM. Control response and apparent stability will decrease with rotor speed. In moderate turbulence, a minimum rotor speed of 314 RPM is recommended. The use of 324 RPM is recommended for cruise, climb, and descent only for encounters of severe turbulence where maximum possible control is required because it will increase fuel flow 5 to 25 percent compared to 314 depending on conditions.

7-XX Altitude Considerations

Planned altitude should be the next normal altitude above optimum altitude. This will compensate for decreasing weight as fuel is consumed. If greater accuracy is desired, compute cruise performance in several segments to account for decreasing gross weight. At light weights or cold temperatures optimum altitude will be above 10,000 feet. If oxygen is not available, cruise as near to 10,000 ft as ATC and other operational considerations allow.

NOTE

Fuel flow improvement data will not be accurate if the selected cruise altitude is significantly below optimum cruise altitude.

7-XX Climb/Descent Considerations

To minimize the range loss during the climb to optimum altitude, climb 10 knots below optimum-altitude-max-range indicated-airspeed, max torque and 314/6400 RPM. Rate of climb will be approximately the same from 314 to 324 RPM although torque will be higher and fuel flow lower at 314 RPM. To maximize the range increase, descend at minimum rotor speed, at 10 knots below max range airspeed, at normal descent rates. Increase indicated airspeed 3 knots for each 1000 feet descent. For best endurance, climb at max rate of climb speed and max torque.

7-XX USE OF CHARTS

The first step in computing optimum cruise performance is to determine winds and FAT at optimum cruise altitude and the altitude that would otherwise be used, "check altitude". The best source of this information is the winds aloft forecast, where both winds and FAT can be interpolated to both altitudes. If this forecast is not available, information from an aircraft currently or recently in flight or surface conditions can be used. Example VIII-1 shows how to correct FAT at any altitude to expected FAT at cruise altitude and how to determine optimum altitude and fuel flow. For gross weights less than 7500 lb use Example VIII-4, and Sheet 2 for determining altitude and fuel flow at 294 rotor RPM.

The next step is to compare the effects of winds with the effects of altitude on range performance. If headwinds decrease or tailwinds increase with altitude, this comparison is not required as both winds and altitude will improve performance. The range decrease with increasing headwinds or decreasing tailwinds at higher altitudes may negate the benefits of cruising at optimum altitudes. Examples VIII-2 and 3 show how to make this comparison. A positive net gain will show the potential percent increase in range by using optimum cruise, not the decrease in fuel flow.

If maximum endurance (flight time) is required, use sheet 3. Example VIII-5 shows how to use this chart.

7-XX CONDITIONS

a. **Maximum Range/Endurance Airspeed.** These charts are based on maximum range or endurance airspeeds from the normal cruise charts at the planned altitude, FAT and GW.

b. **Configuration** affects the aircraft drag and therefore range and endurance. If the external configuration is not clean, corrections described in the DRAG section will be required.

EXAMPLE VIII-2

WANTED

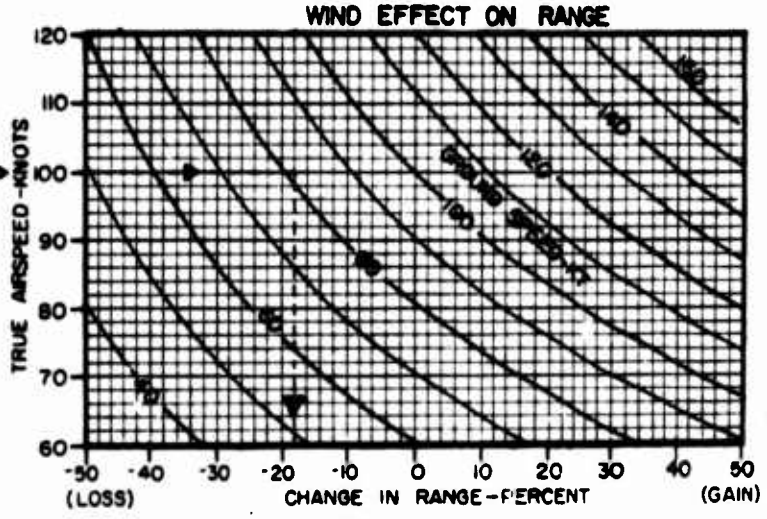
Comparison of wind effects

KNOWN

Check altitude=2000 ft
Optimum altitude=9200 ft (example VIII-1)
Check max range TAS=108 kts
Optimum alt max range TAS=100 kts
(from cruise charts)
Check ground speed=93 kts
Optimum alt ground speed =82 kts
(computed from winds aloft and TAS)

METHOD

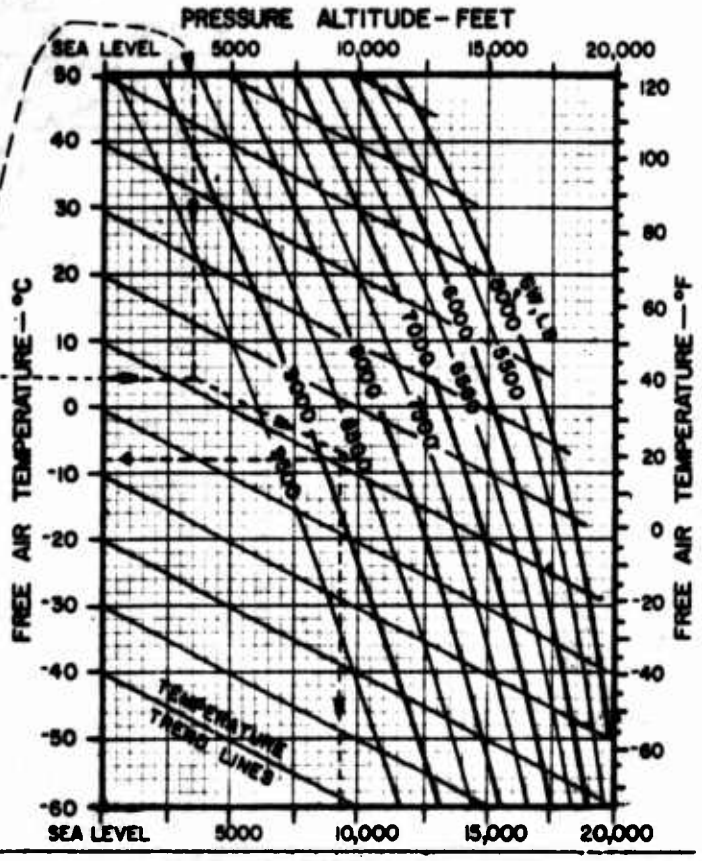
Enter optimum TAS here ---------
Move right to optimum ground speed
Move down, read percent change=-18%
Repeat for check altitude, change=-13%
Subtract check% from optimum %
-18%-(-13%)= -5% gain from winds (loss)



MAXIMUM RANGE CRUISE
314 ROTOR/6400 ENGINE RPM

MAX RANGE AIRSPEED JP-4/5 FUEL CLEAN CONFIGURATION

MAX RANGE
6400 RPM
UH-1H
T53-L-13



EXAMPLE VIII-1

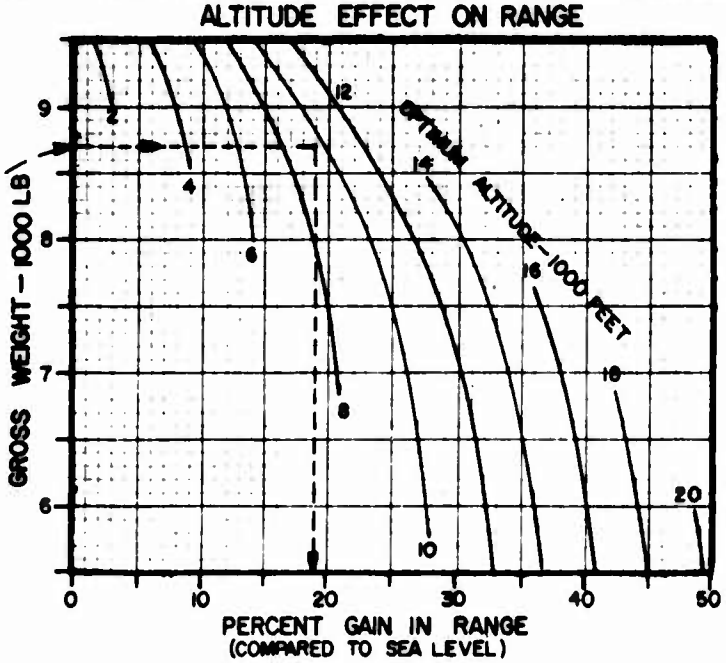
WANTED
Optimum cruise altitude
Fuel Flow at optimum altitude
KNOWN
Cruise Start Gross Weight = 8700 lb
Free air temperature = 4°C
at 3500 ft pressure altitude
METHOD
Enter pressure alt on top, move down
Enter free air temperature here
Move right
From FAT/Altitude intersection, parallel trend lines toward GW
At GW, move down, read optimum pressure altitude = 9200 feet
From intersection, parallel trend lines to planned altitude = 10,000 ft
Move left, read expected FAT = -8°C
From normal cruise charts at planned GW, Altitude, and expected FAT
Read Fuel flow = 450 lb/hr

EXAMPLE VIII-3

WANTED
Gain in range from altitude
Net gain in range
KNOWN
Cruise start gross weight = 8700 lb
Optimum altitude = 9200 ft
(from Example VIII-1)
Check altitude = 2000 ft
Percent gain (loss) from winds = -5%
(from Example VIII-2)
METHOD
Enter cruise start GW here
Move right to optimum altitude
Move down read % gain = 19%
Adjust for check altitude

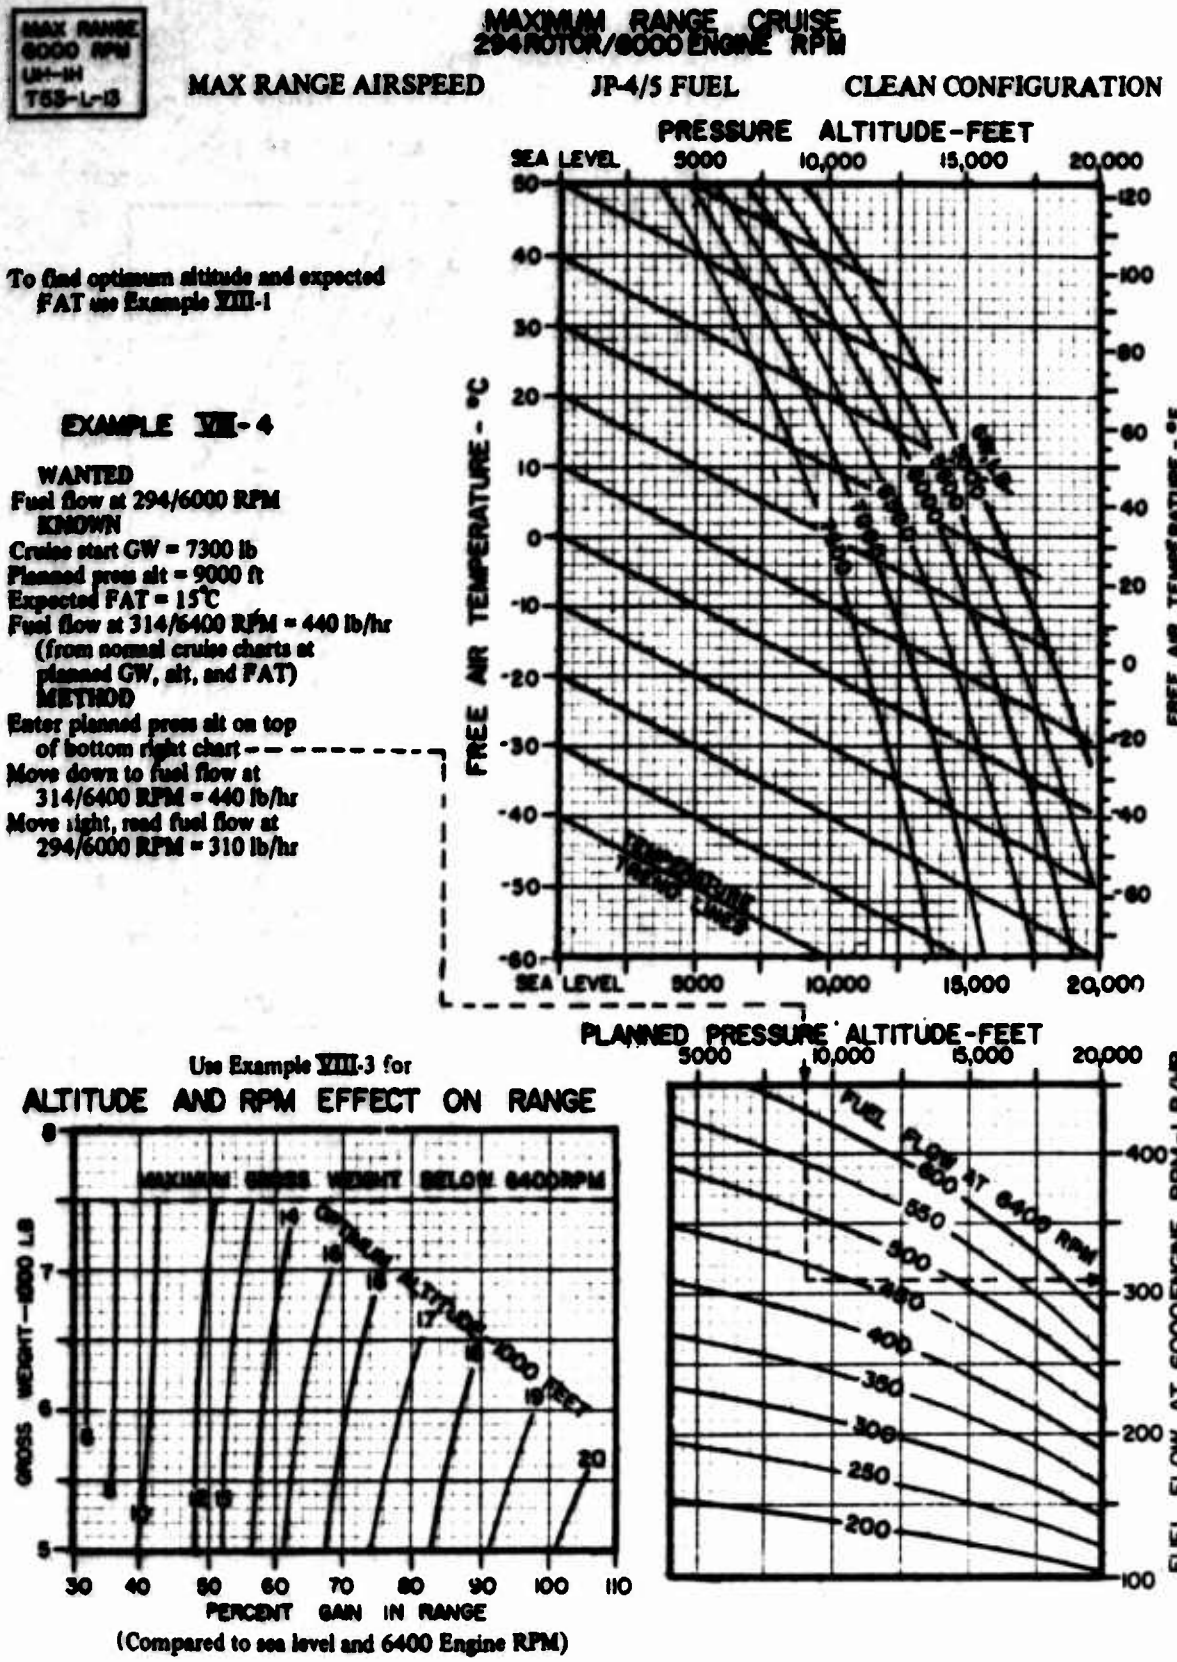
$$19\% \times \frac{9200 - 2000}{9200} = 15\%$$

Add (subtract) wind effect
Net gain at optimum altitude =
15% + (-5%) = 10%



DATA BASIS: Preliminary Estimates from ASTA 66-04, Nov 1970

Figure 7-8 Maximum Range, 314 Rotor/6400 Engine RPM (Sheet 1 of 3)



DATA BASIS: Preliminary Estimates from ASTA 66-04, Nov 1970.

Figure 7-8 Maximum Range, 294 Rotor/6000 Engine RPM (Sheet 2 of 3)

1. Current - 10 information.

The optimum cruise format is designed to be compatible with the -10 information currently in revision. The major changes are: (a) reduction of normal cruise, climb, and descent rotor/engine speed to 314/6400 RPM, (b) cruise speed presented at maximum specific range, not 99% max at higher airspeed; and (c) effects of head wind/tailwind presented on normal cruise charts. If the (draft) revised -10 is not available at the time of the evaluation, correct current data as follows:

(1) Correct fuel flow at 6600 rpm to 6400 rpm by subtracting 5%. This is approximately correct at standard and warmer temperatures and increasingly conservative at colder temperatures.

(2) Correct maximum range cruise speeds by subtracting 5 knots. Actual change varies from 2 to 15 knots depending on conditions.

(3) To correct maximum range cruise speeds for winds, increase cruise speed by half the amount of the headwind or decrease cruise speed by half the amount of the tailwind. (Tend to keep ground speed constant). Maximum speed should not exceed V_{NE} and minimum speed should not fall below 5 knots above max endurance-R/C speed. In this and all performance calculations, wind speed should be considered as the difference between ground speed and true airspeed, not the geometric component i.e. A direct crosswind will reduce ground speed below true airspeed and therefore effectively have a headwind component.

2. Low Rotor Speeds to 294/6000 RPM.

Continuous operation at 294/6000 rotor/engine RPM will be approved for gross weights below 7500 lb. This will reduce fuel consumption further and lower optimum altitude several thousand feet. Rotor speeds below 314 RPM should be used only in less than moderate turbulence. Hard maneuvering should be avoided. The critical load is rotor blade trailing edge buckling predicted at 1.5 g normal acceleration (presumbly with some safety margin). If inadvertent high g loads are experienced, the rotor blades should be inspected for trailing edge or skin wrinkling or separation. If failure were to occur, a portion of the trailing edge and aft section of the blade might be lost. A high lateral one/rev vibration would be felt. The aircraft would be controllable, however, an immediate landing should be made.

The low rotor speed warning should be reset to 289-294 rotor RPM (5900 to 6000 engine RPM) so that it will be operable at the low cruise rotor speeds. Beep range adjustments may also be required. Sudden engine failures from low rotor speed are not considered to present significant additional problems. Lower transient rotor speeds will be encountered than from 324 rotor RPM and some additional altitude will be required to regain normal (mid-green) autorotational rotor speeds. Transient rotor speeds to 250 RPM have been approved for past tests and 240 RPM have been experienced. There was no problem regaining RPM after collective was lowered.

There is a somewhat open question on rotor flapping at low rotor speeds. In 1974 an Army study group concluded low rotor speed was a factor in excessive rotor flapping and subsequent mast failure. In 1978, Bell Helicopter reported on flight tests that showed no significant correlation between rotor speed and flapping. The most significant factor was low g maneuvering, with large sideslips an additional significant factor. If engine failure is experienced at low RPM, collective should be lowered smoothly to avoid low g's and large sideslips should be avoided. At higher speeds aft cyclic should be applied to maintain positive g's. This will also assist regaining rotor speed. Until this question is investigated by Army flight test, practice throttle chops from low RPM are not recommended.

3. Rotating Control Wear.

During the UH-1H fuel conservation flight tests, apparent increased wear of the rotating control system was experienced, particularly the pitch change link bearings. This may have been due to exceeding V_{NE} for test purposes or the high Mach numbers experienced at the cold temperatures. The wear may also be due to low rotor speed operation. It is desirable to monitor wear in the rotating control system during the field trials. Also V_{NE} should be computed for all planned flight conditions and rigidly observed.

4. Max Torque Climb

The gain in range and endurance and the reduction of fuel consumption, all come from operating the engine at more efficient conditions. Turbine engines become more efficient (produce more horsepower/fuel used) at higher altitudes and at maximum power settings. Optimum conditions (airspeed, altitude, etc) are reached when the increasing engine efficiencies are overcome by decreasing aircraft efficiencies. For this reason, the climb to optimum altitude should be made at maximum power. In practice, topping power need not be used but reducing power to 1/2 percent below topping N_1 will produce only slightly lower rates of climb and an insignificant reduction in range. This will eliminate the need to constantly control rotor/engine speed and will eliminate the annoying power oscillation at topping power. Higher airspeeds than maximum rate-of-climb speed are used for max range climbs so that substantially more distance is covered while operating the engine at its most efficient condition for a slightly longer period of time.

5. Top of Descent.

The so called "Top of Descent" point at which the descent is begun is the most critical point in achieving maximum range/minimum fuel used. If the descent is started early, more time will be spent at lower less efficient altitude. If the descent is started late, lower less efficient power settings will be required. If arrival at final approach point is high, additional time and fuel will be spent descending. If arrival at final approach altitude is early, additional time will be spent at low inefficient altitude. Optimum descent profile is to maintain cruise power setting and increase speed to achieve normal descent rates (500 fpm). If airspeed limits, vibration, or air turbulence preclude this profile, use the highest practical airspeed. This profile will require descent to begin earlier than in current practice. For example, a descent to sea level from 10,000 feet would require approximately 20 minutes or 1/3 hours. At 100 to 120 knots, descent should begin 30 to 40 nautical miles from final approach point. At or slightly before reaching final approach point, RPM should be reset to 324/6600 in preparation for landing.

6. Actual Mission Planning.

The data presented on the charts are only approximations. There is no doubt that substantial gains will be made from both rotor speed and altitude. However, until experience is gained using optimum cruise, actual missions should be planned using current 324/6600 RPM data in the current handbook. Minimum margins can be used for this planning since gains will be made. Optimum cruise fuel usage should also be computed for comparison to acutal fuel used during the mission. This will allow you to make a judgement as to the accuracy of the optimum cruise data. If sufficient confidence is gained in the optimum cruise data, actual mission planning can be based on it. However, conservatism should be retained since a significant change in conditions (heavier weight, hotter or colder temperatures, different individual aircraft) could change its accuracy.

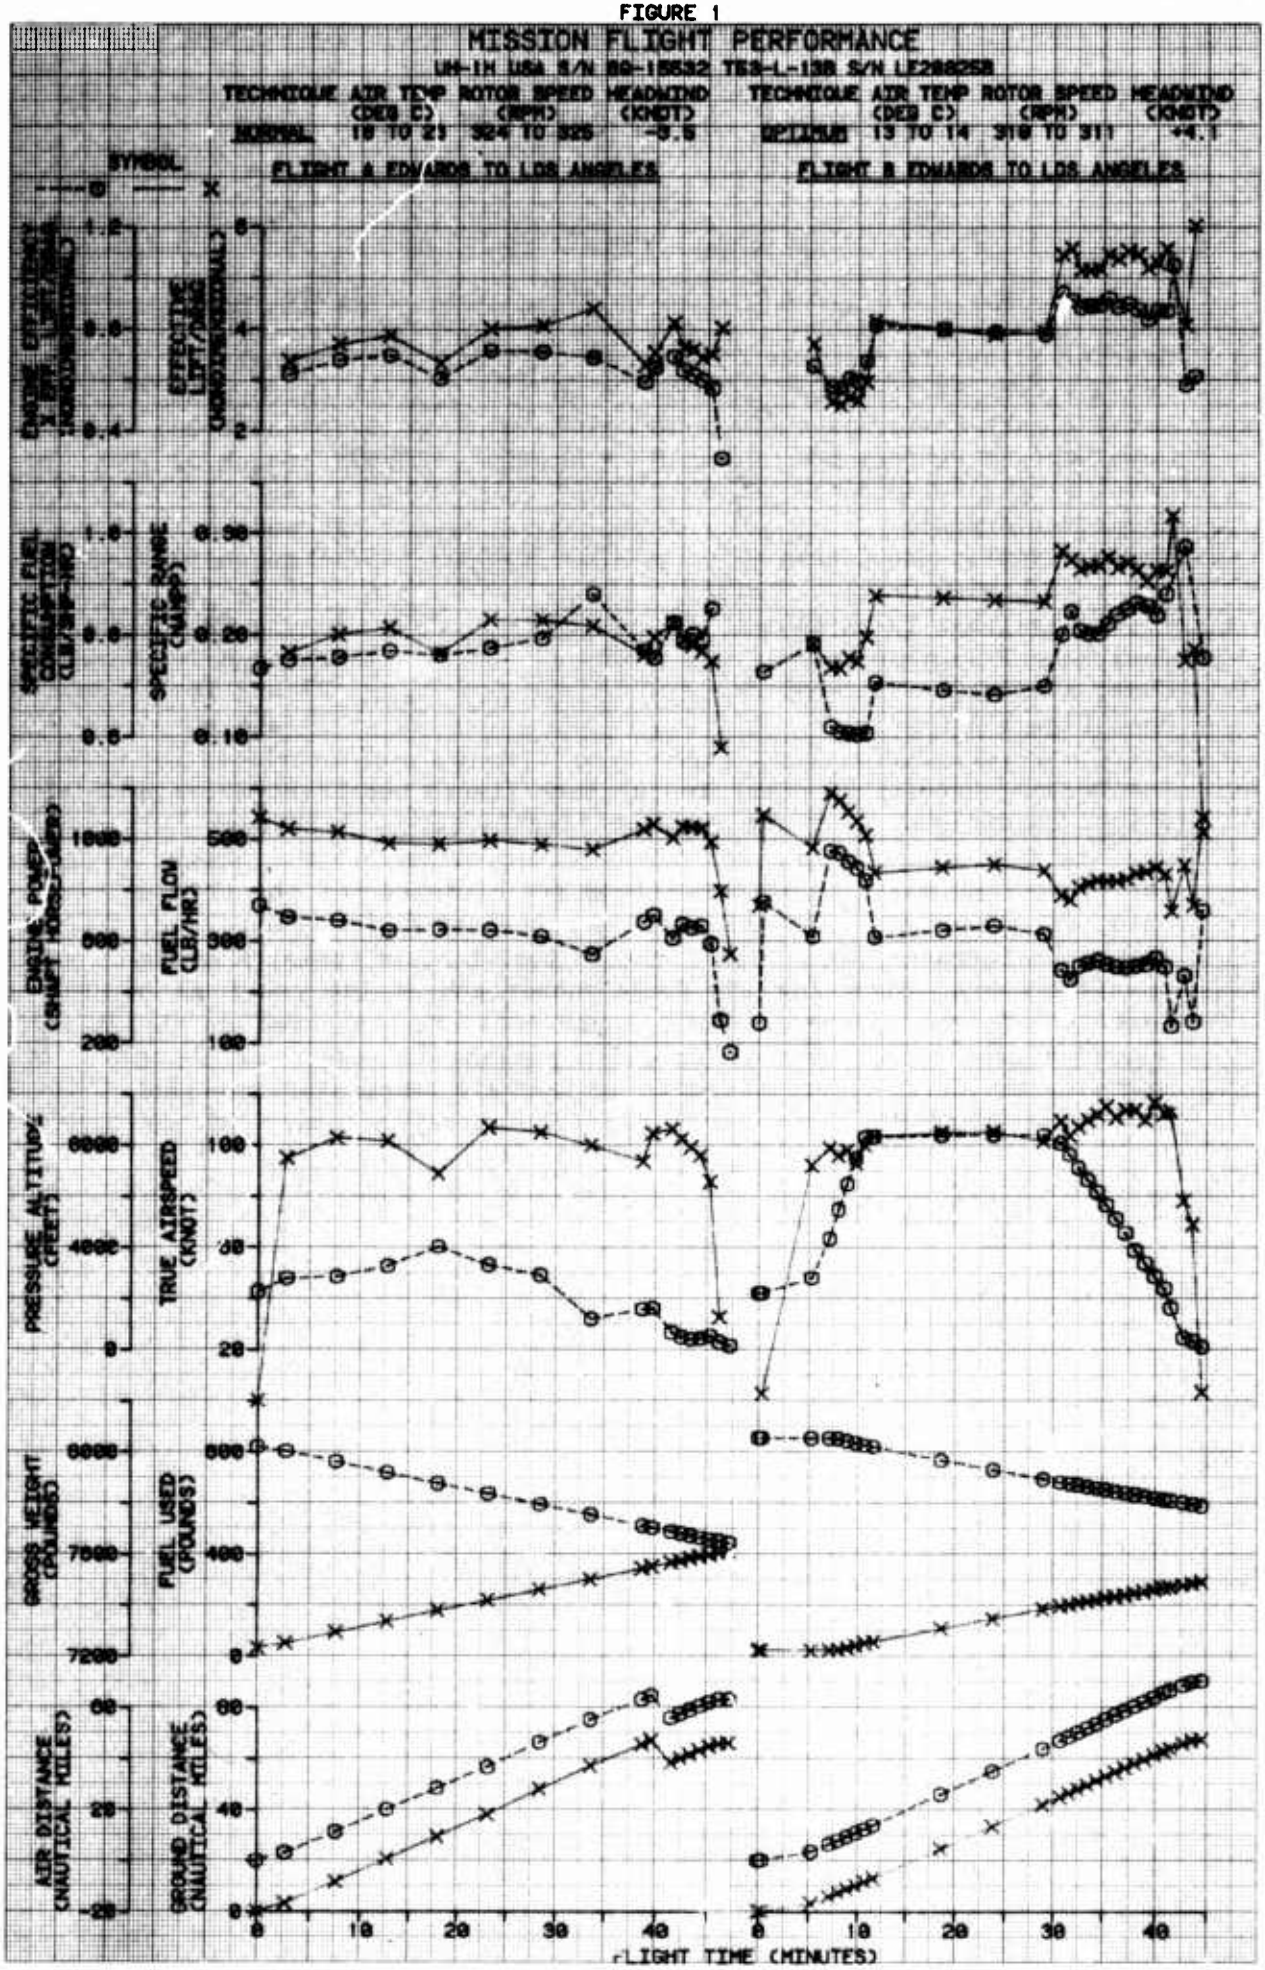
APPENDIX F. GRAPHICAL TEST DATA

INDEX

Figure	Figure Number
Mission Flight Performance	1 through 10
Level Flight Performance $C_T \times 10^4 = 40$	11 through 24
Level Flight Performance $C_T \times 10^4 = 44$	25 through 38
Level Flight Performance $C_T \times 10^4 = 48$	39 through 52
Level Flight Performance $C_T \times 10^4 = 52$	53 and 54
Hover Performance	55 and 56
Power Division and Losses	57 through 60
Referred Engine Characteristics	61 through 67
Power Available T53-L-13B	68 and 69
Fuel Flow T53-L-13B	70 through 76
Power Available T53-L-703	77 and 78
Fuel Flow T53-L-703	79 and 80

The heading conditions presented on each figure represent average flight conditions. For the mission flights (figs. 1 through 10) heading data are averaged for the cruise portion of the flight. For other figures, heading conditions are averaged for the entire data set presented. Two figures are presented for each level flight performance test. The first in the standard format showing specific range, advancing tip Mach number and engine power as a function of true airspeed. Additional data are presented on the second figure to permit more detailed analysis of the data. For example, the first figure presents ambient air temperature rounded to the standard 0.5°C to imply the (estimated) accuracy of the data. The second figure presents air temperature rounded to 0.1°C to imply the (estimated) precision of the data.

FIGURE 1


MISSION FLIGHT PERFORMANCE
UH-1H USA S/N 66-16532 T53-L-13B S/N LE28025B
TECHNIQUE AIR TEMP (DEG C) ROTOR SPEED (RPM) HEADWIND (KNOT)
NORMAL 19 TO 21 324 TO 325 -0.5
TECHNIQUE AIR TEMP (DEG C) ROTOR SPEED (RPM) HEADWIND (KNOT)
OPTIMUM 13 TO 14 310 TO 311 +4.1
SYMBOL
FLIGHT A EDWARDS TO LOS ANGELES
FLIGHT B EDWARDS TO LOS ANGELES
ENGINE OUTPUT SHAFT HORSEPOWER (HUNDREDS)
EFFECTIVE LIFT/DRAG (NONDIMENSIONAL)
SPECIFIC FUEL CONSUMPTION (LB/SHP-HR)
SPECIFIC RANGE (NMPP)
ENGINE POWER (SHAFT HORSEPOWER)
FUEL FLOW (LB/HR)
PRESSURE ALTITUDE (FEET)
TRUE AIRSPEED (KNOT)
GROSS WEIGHT (POUNDS)
FUEL USED (POUNDS)
AIR DISTANCE (NAUTICAL MILES)
GROUND DISTANCE (NAUTICAL MILES)
FLIGHT TIME (MINUTES)

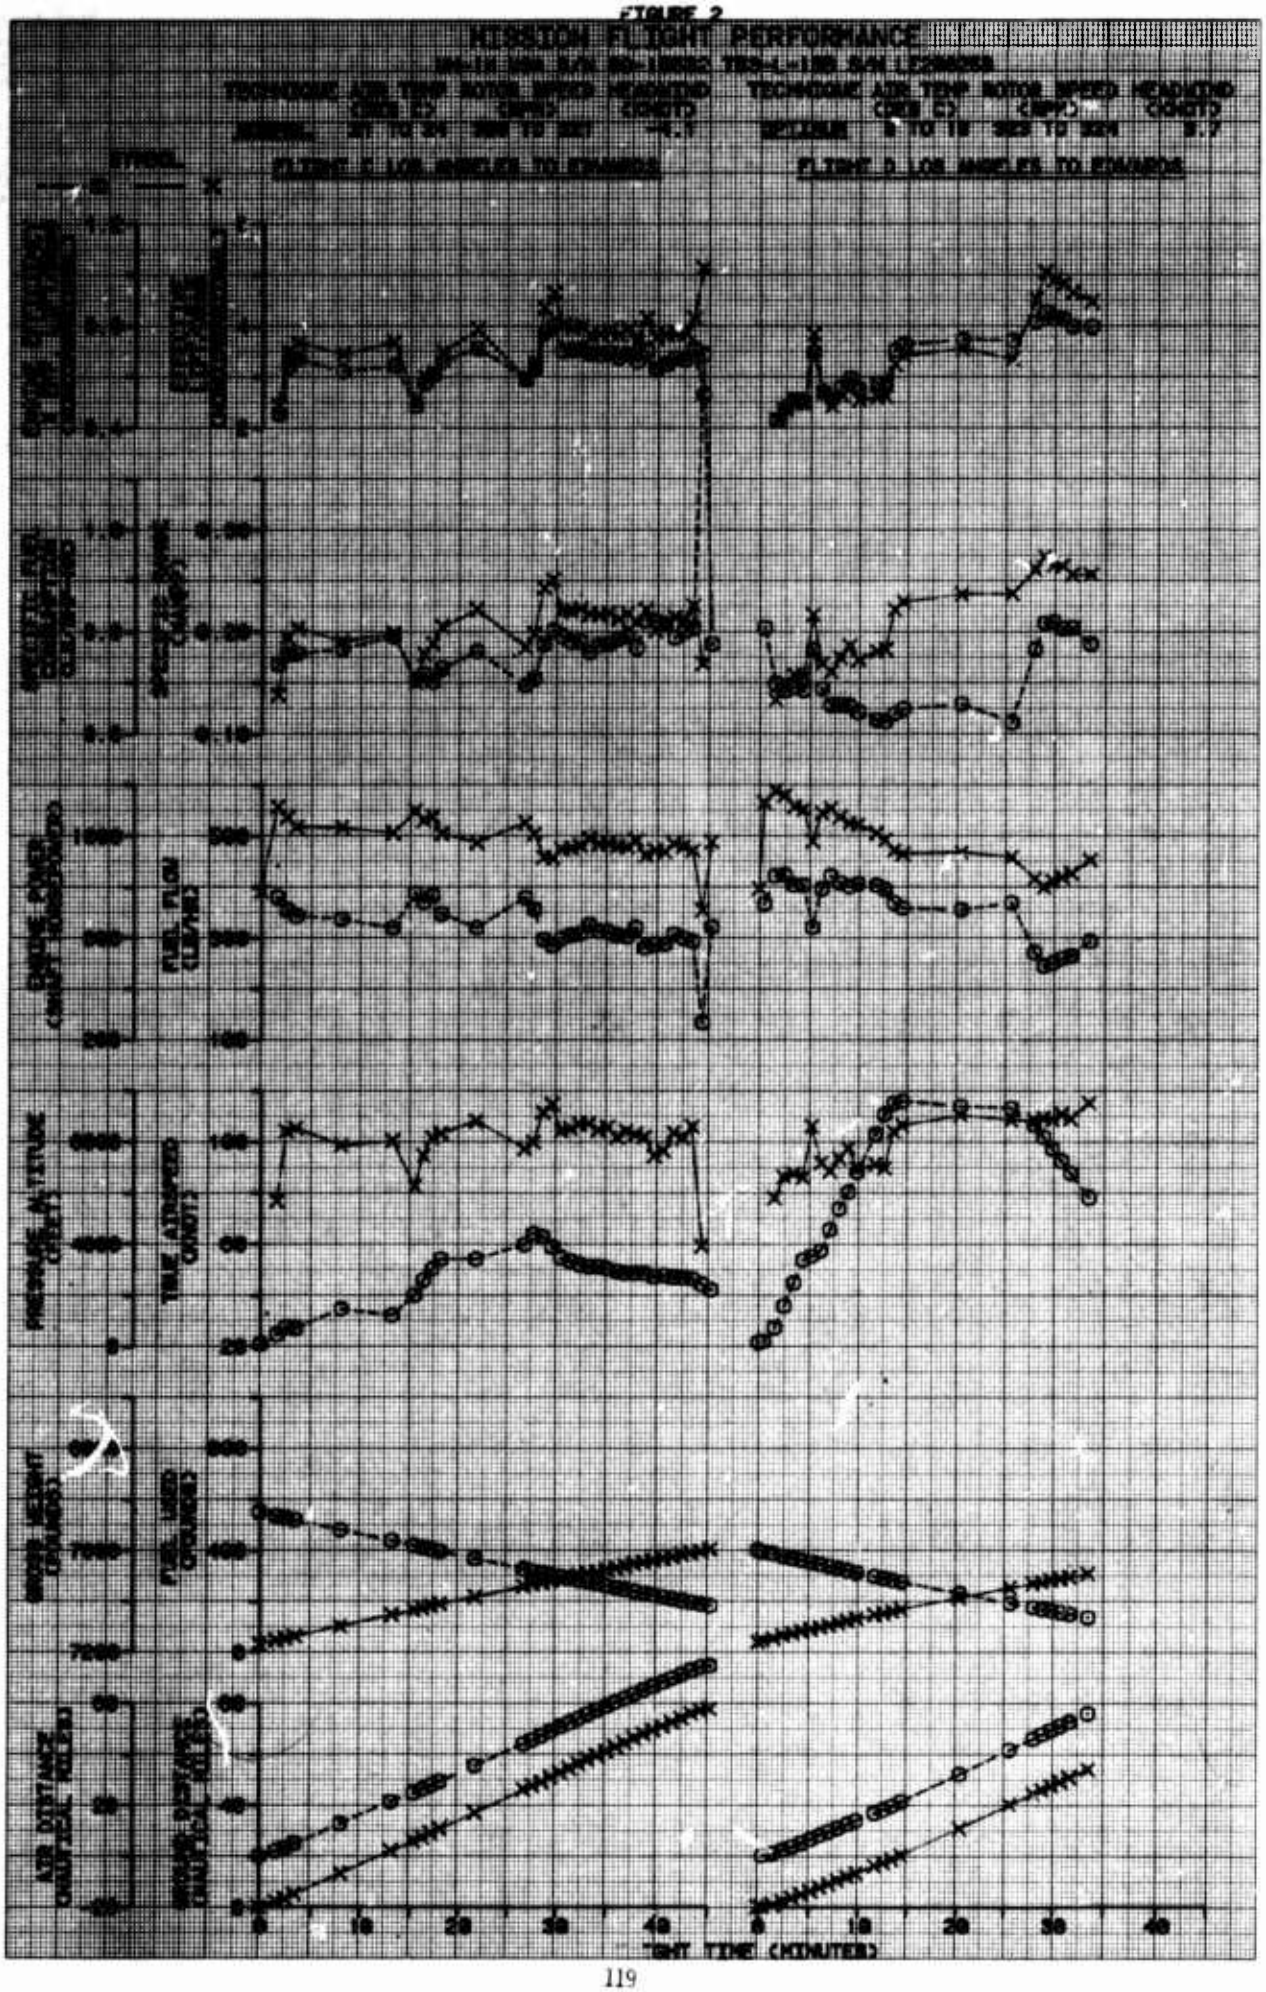

FIGURE 2
MISSION FLIGHT PERFORMANCE
FLIGHT 2 LOS ANGELES TO EDWARDS
FLIGHT 3 LOS ANGELES TO EDWARDS
"UNIT TIME" (MINUTES)

FIGURE 3

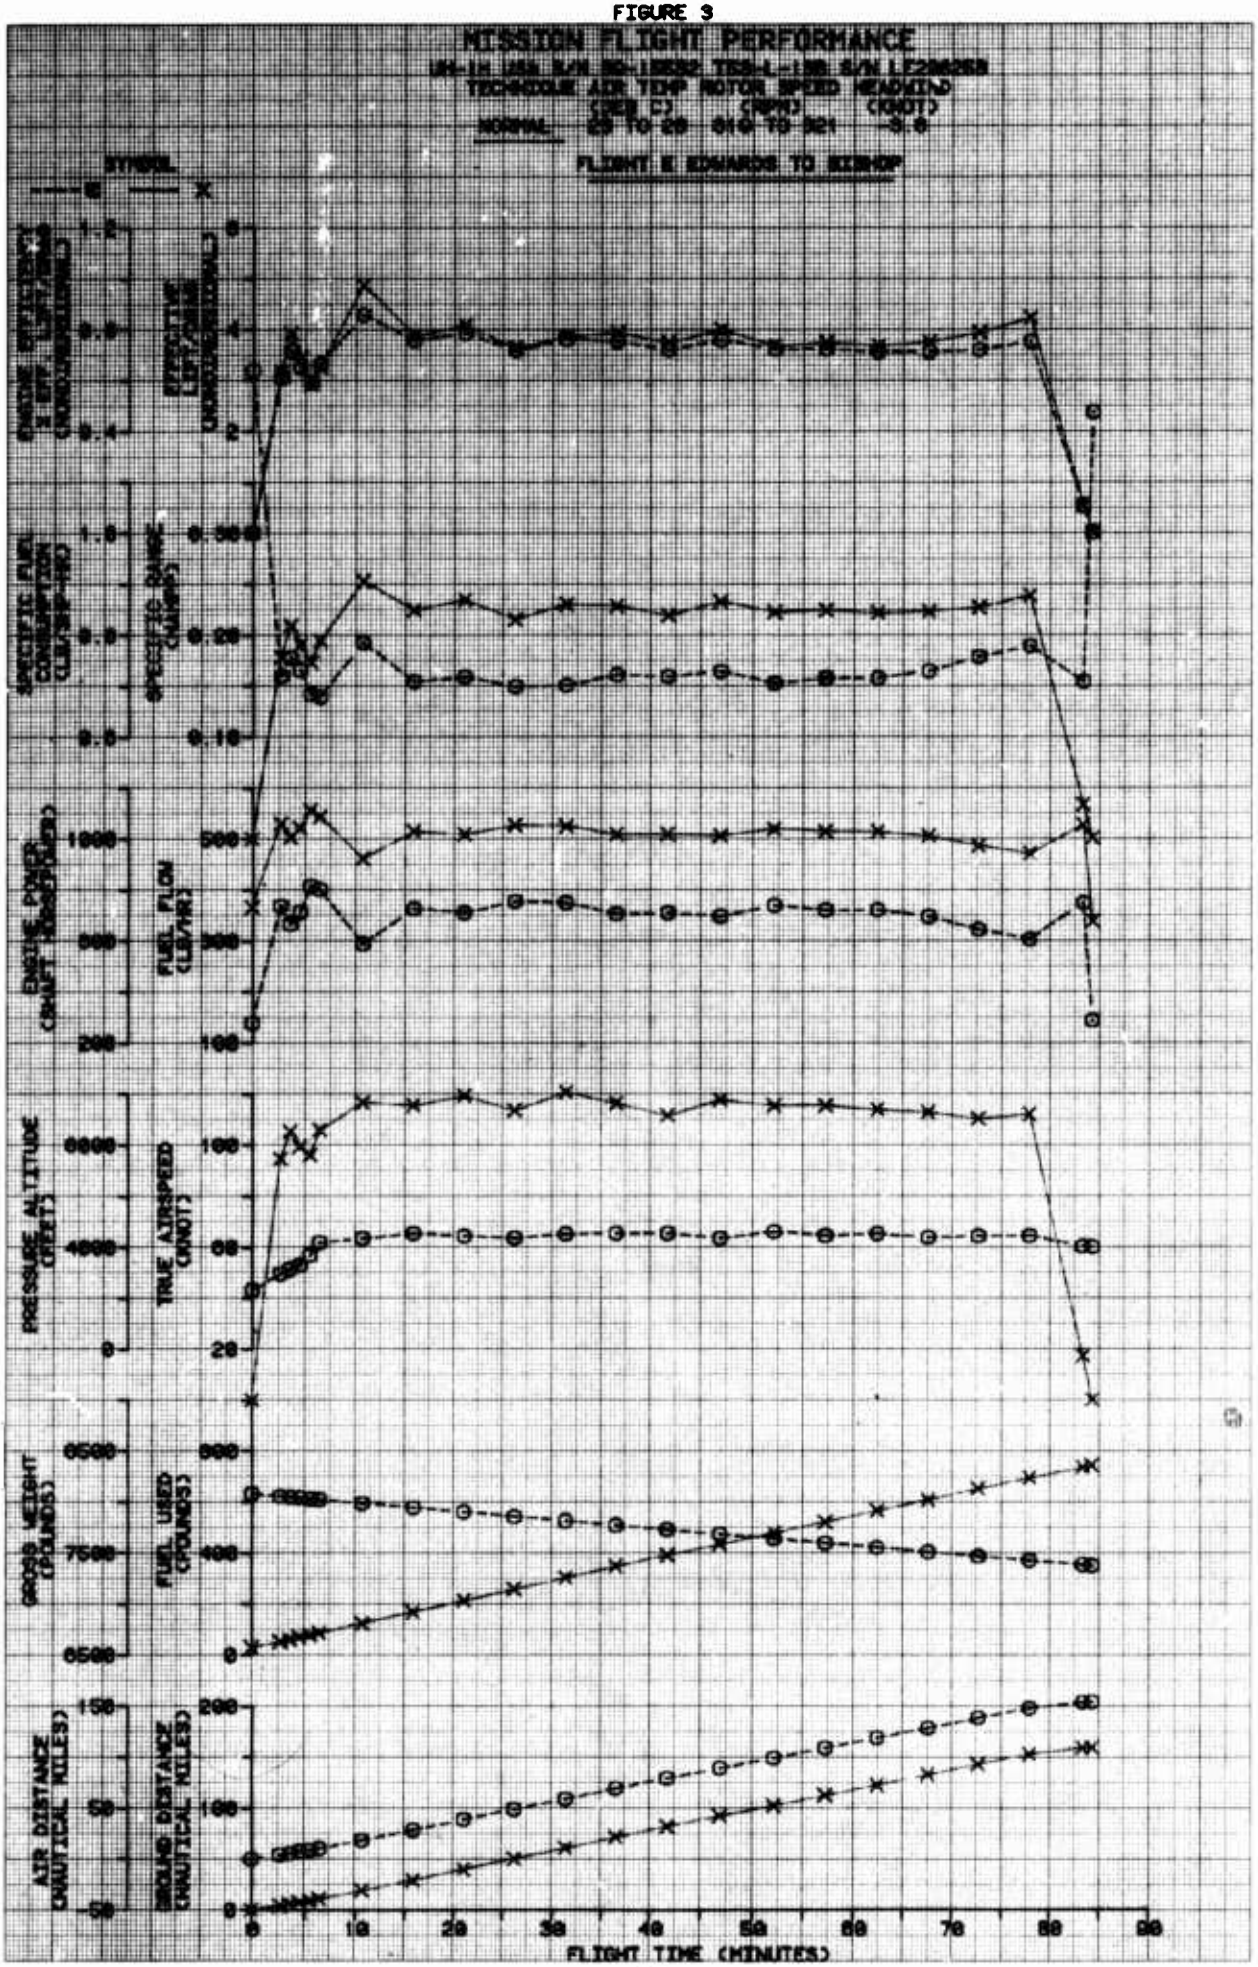

MISSION FLIGHT PERFORMANCE
TECHNICOLOR AIR TEMP MOTOR SPEED HEADING
(DEG F) (RPM) (KNOT)
NORMAL 69 TO 89 610 TO 921 -3.0
FLIGHT 8 ADVANCE TO BISHOP
SYMBOL
ENGINE POWER (SHAFT HORSEPOWER)
FUEL FLOW (LB/HR)
SPECIFIC FUEL CONSUMPTION (LB/SHP-HR)
SPECIFIC RANGE (NM/LB)
PRESSURE ALTITUDE (FEET)
TRUE AIRSPEED (KNOT)
GROSS WEIGHT (POUNDS)
FUEL USED (POUNDS)
AIR DISTANCE (NAUTICAL MILES)
GROUND DISTANCE (NAUTICAL MILES)
FLIGHT TIME (MINUTES)

FIGURE 4

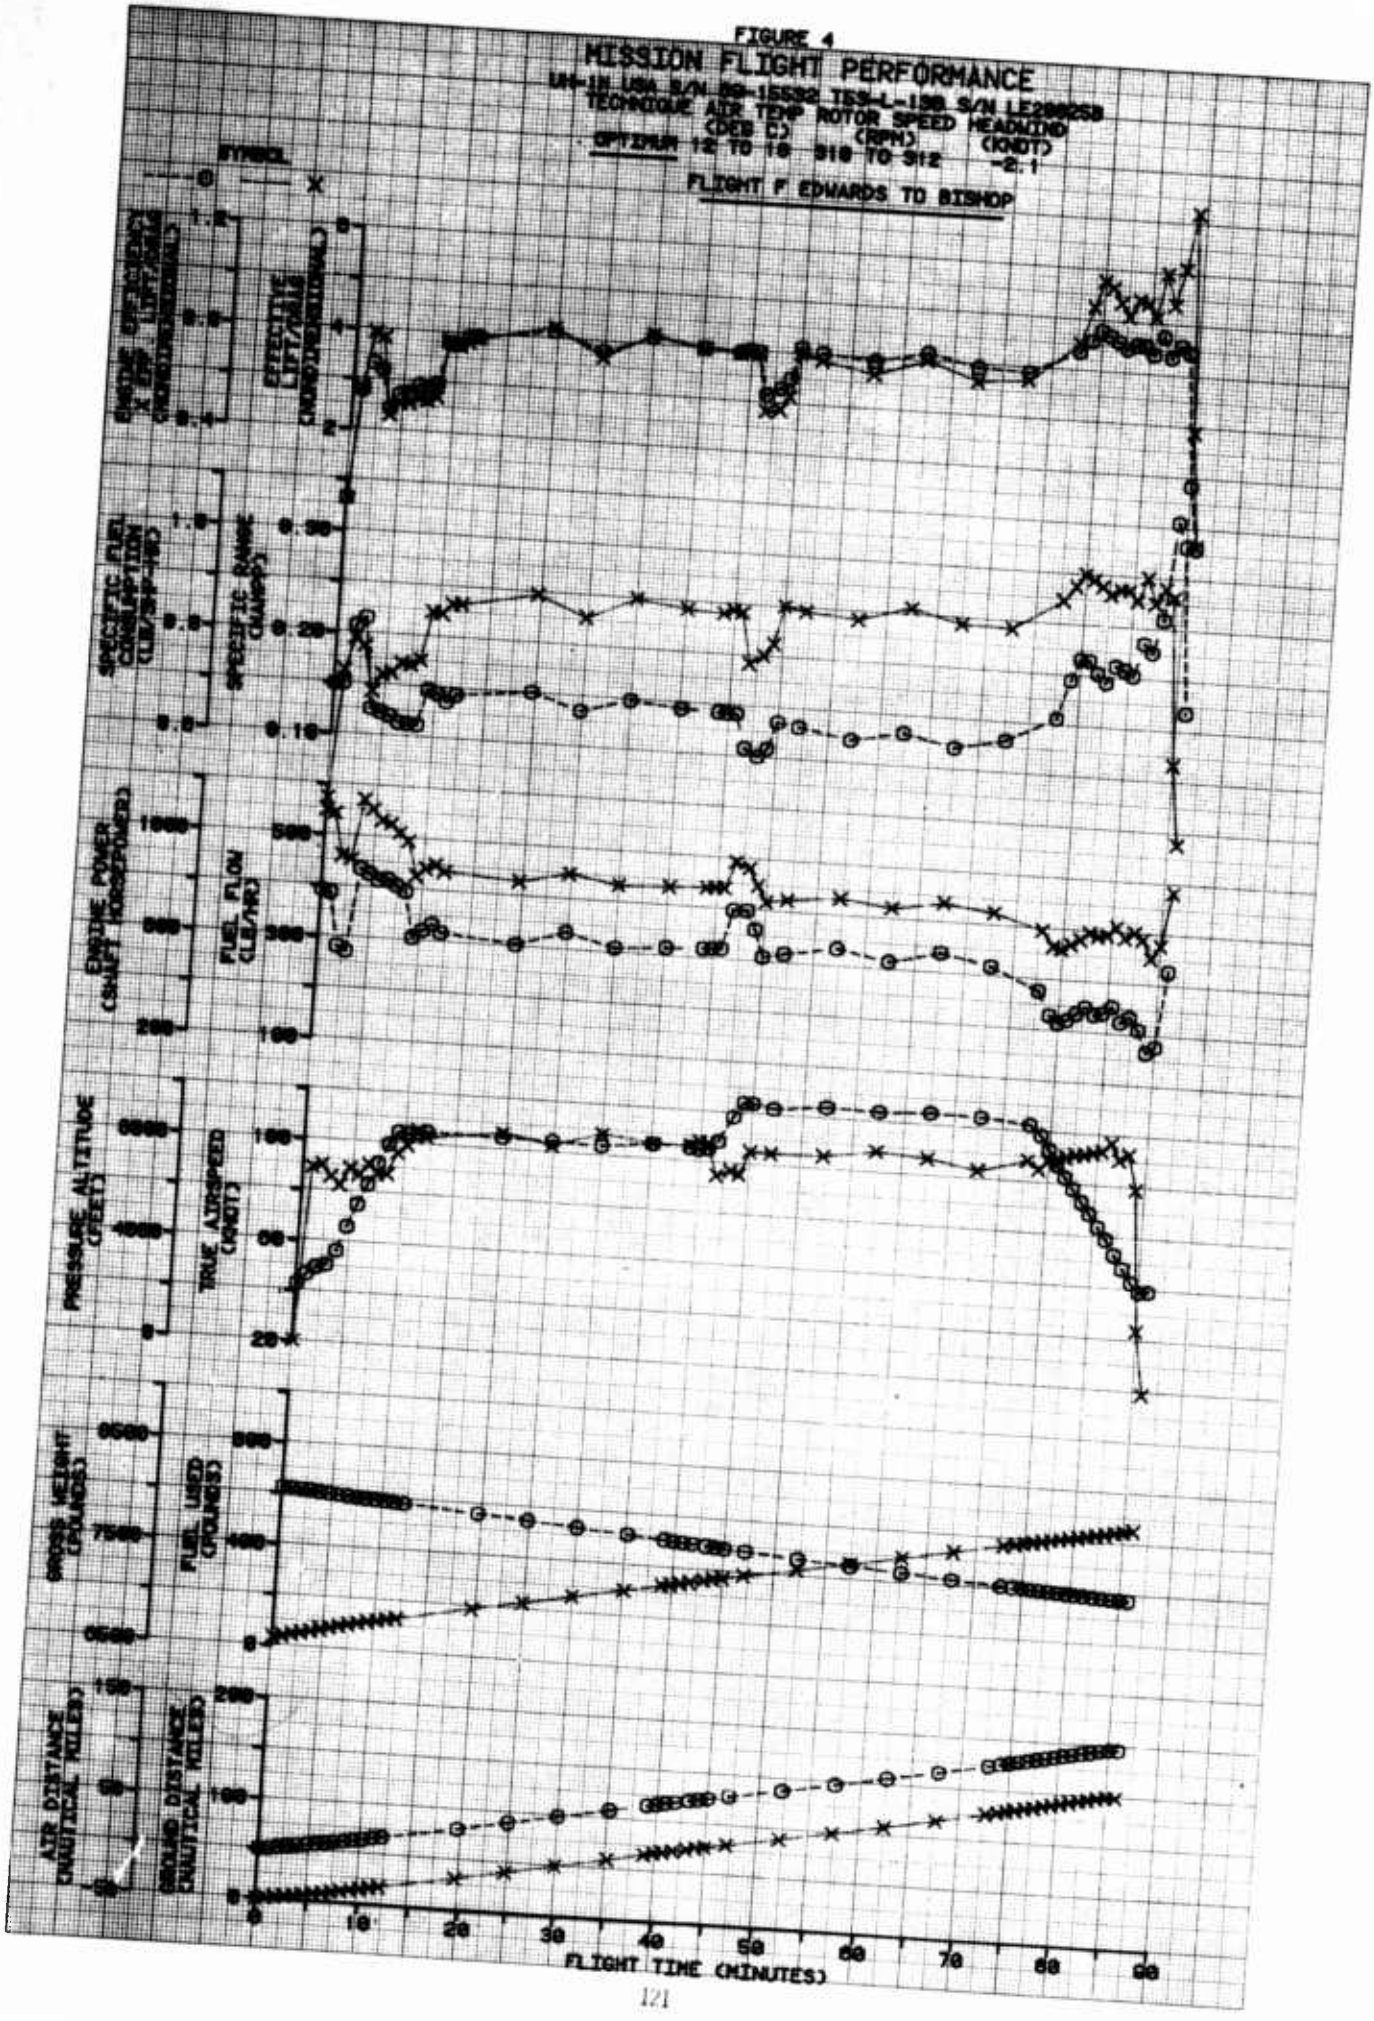

MISSION FLIGHT PERFORMANCE
UH-1B USA S/N 59-15532 TES-L-138 S/N LE2002SB
TECHNIQUE AIR TEMP ROTOR SPEED HEADWIND
(DEG C) (RPM) (KNOT)
OPTIMUM 12 TO 18 310 TO 312 -2.1
FLIGHT F EDWARDS TO BISHOP
SYMBOL
SPECIFIC RANGE (NAUTICAL MILES/LB FUEL)
EFFECTIVE LIFT/DRAG (DIMENSIONLESS)
SPECIFIC FUEL CONSUMPTION (LBS/SHP-HR)
ENGINE POWER (SHAFT HORSEPOWER)
FUEL FLOW (LB/HR)
PRESSURE ALTITUDE (FEET)
TRUE AIRSPEED (KNOT)
GROSS WEIGHT (POUNDS)
FUEL USED (POUNDS)
AIR DISTANCE (NAUTICAL MILES)
GROUND DISTANCE (NAUTICAL MILES)
FLIGHT TIME (MINUTES)

FIGURE 5

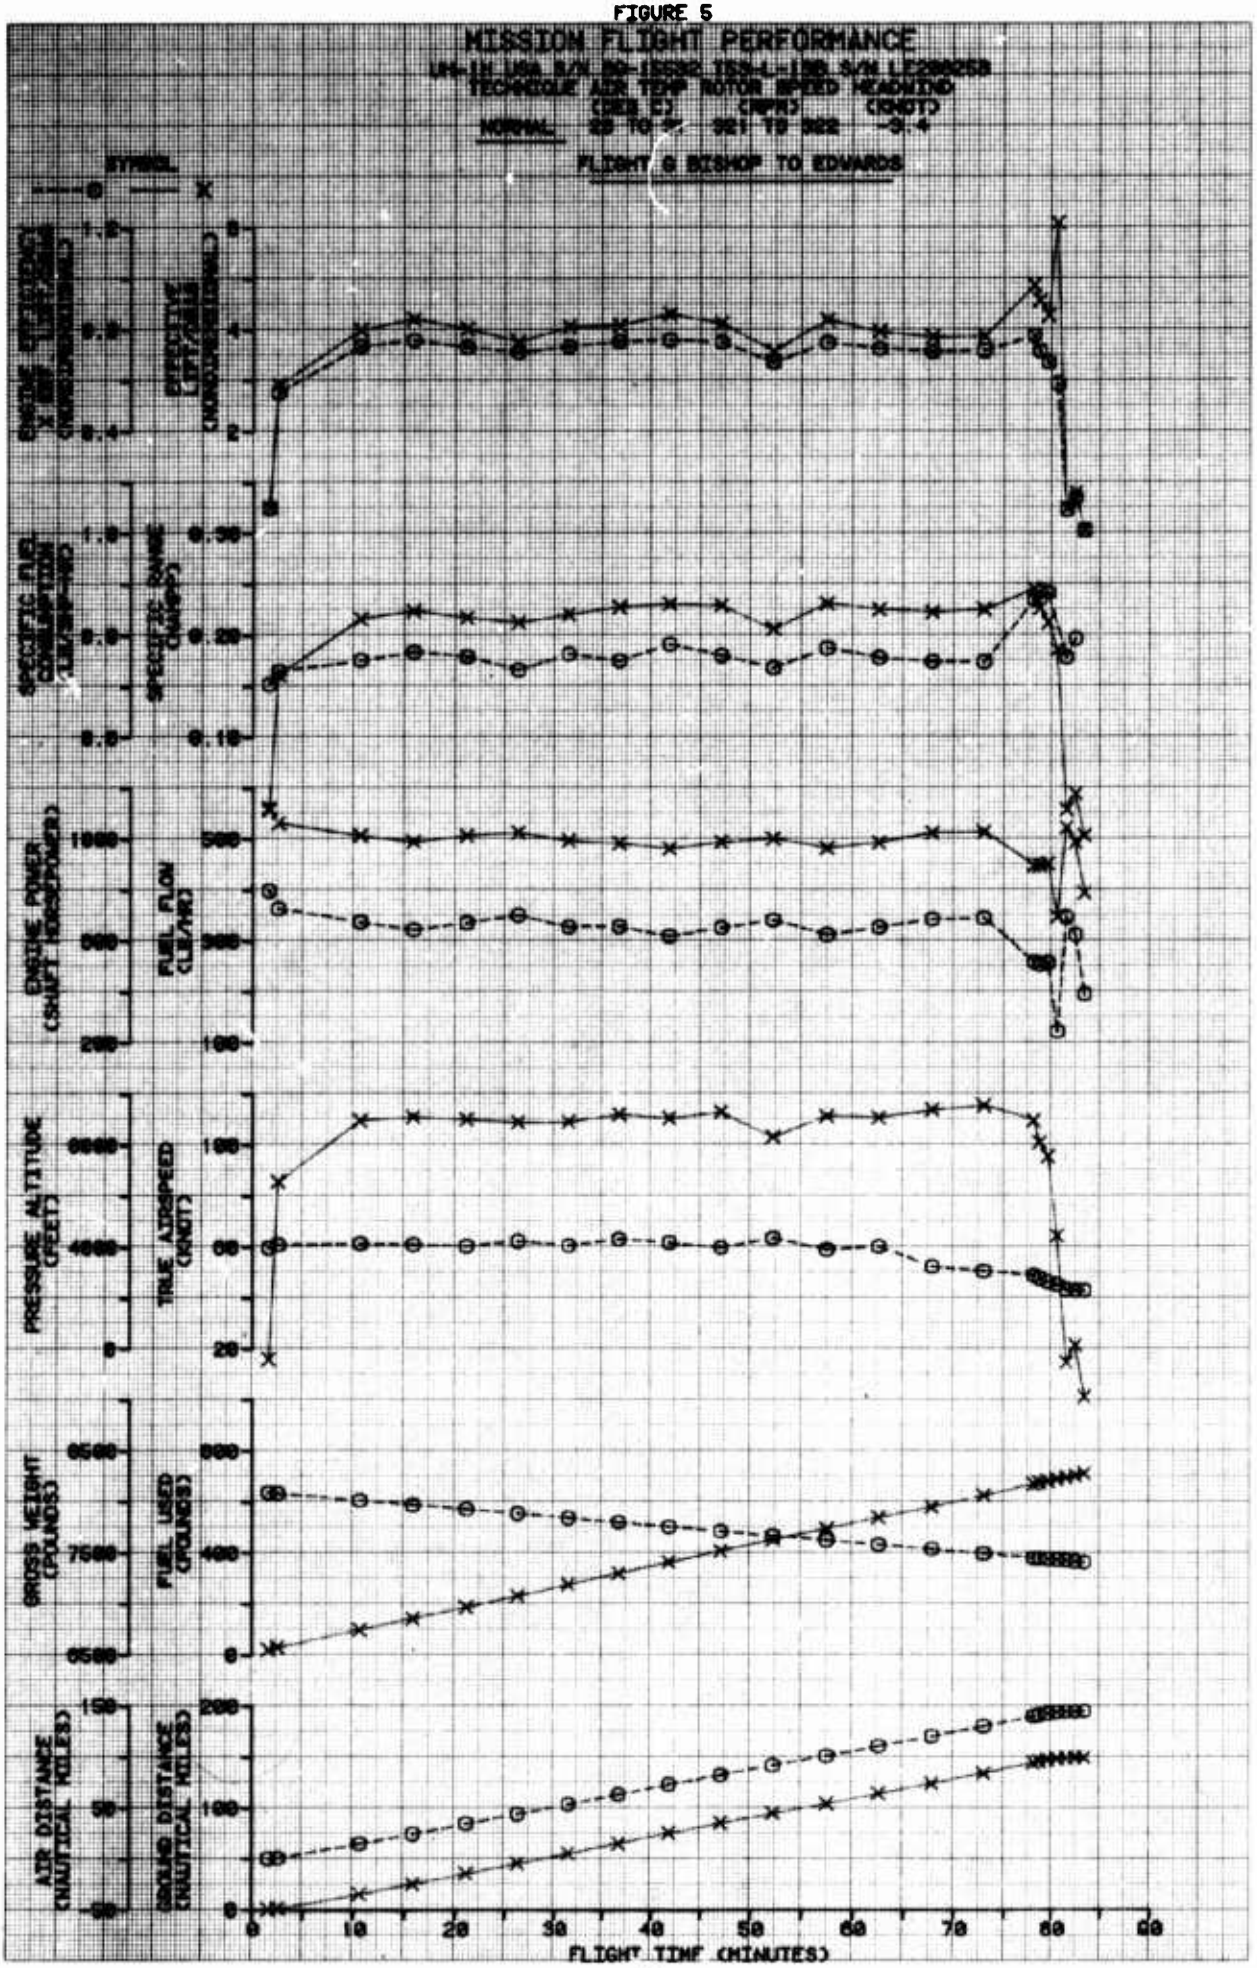

MISSION FLIGHT PERFORMANCE
TECHNICOLOR AIR TEMP MOTOR SPEED HEADING
(DEG C) (RPM) (KNOT)
NORMAL 29 TO 4 921 TO 922 -3.4
FLIGHT 6 BISHOP TO EDWARDS
SYMBOL
SPECIFIC RANGE (NAUT MI/LB)
SPECIFIC FUEL CONSUMPTION (LB/HR/LB)
ENGINE POWER (SHAFT HORSEPOWER)
FUEL FLOW (LB/HR)
PRESSURE ALTITUDE (FEET)
TRUE AIRSPEED (KNOT)
GROSS WEIGHT (POUNDS)
FUEL USED (POUNDS)
AIR DISTANCE (NAUTICAL MILES)
GROUND DISTANCE (NAUTICAL MILES)
FLIGHT TIME (MINUTES)

FIGURE 8

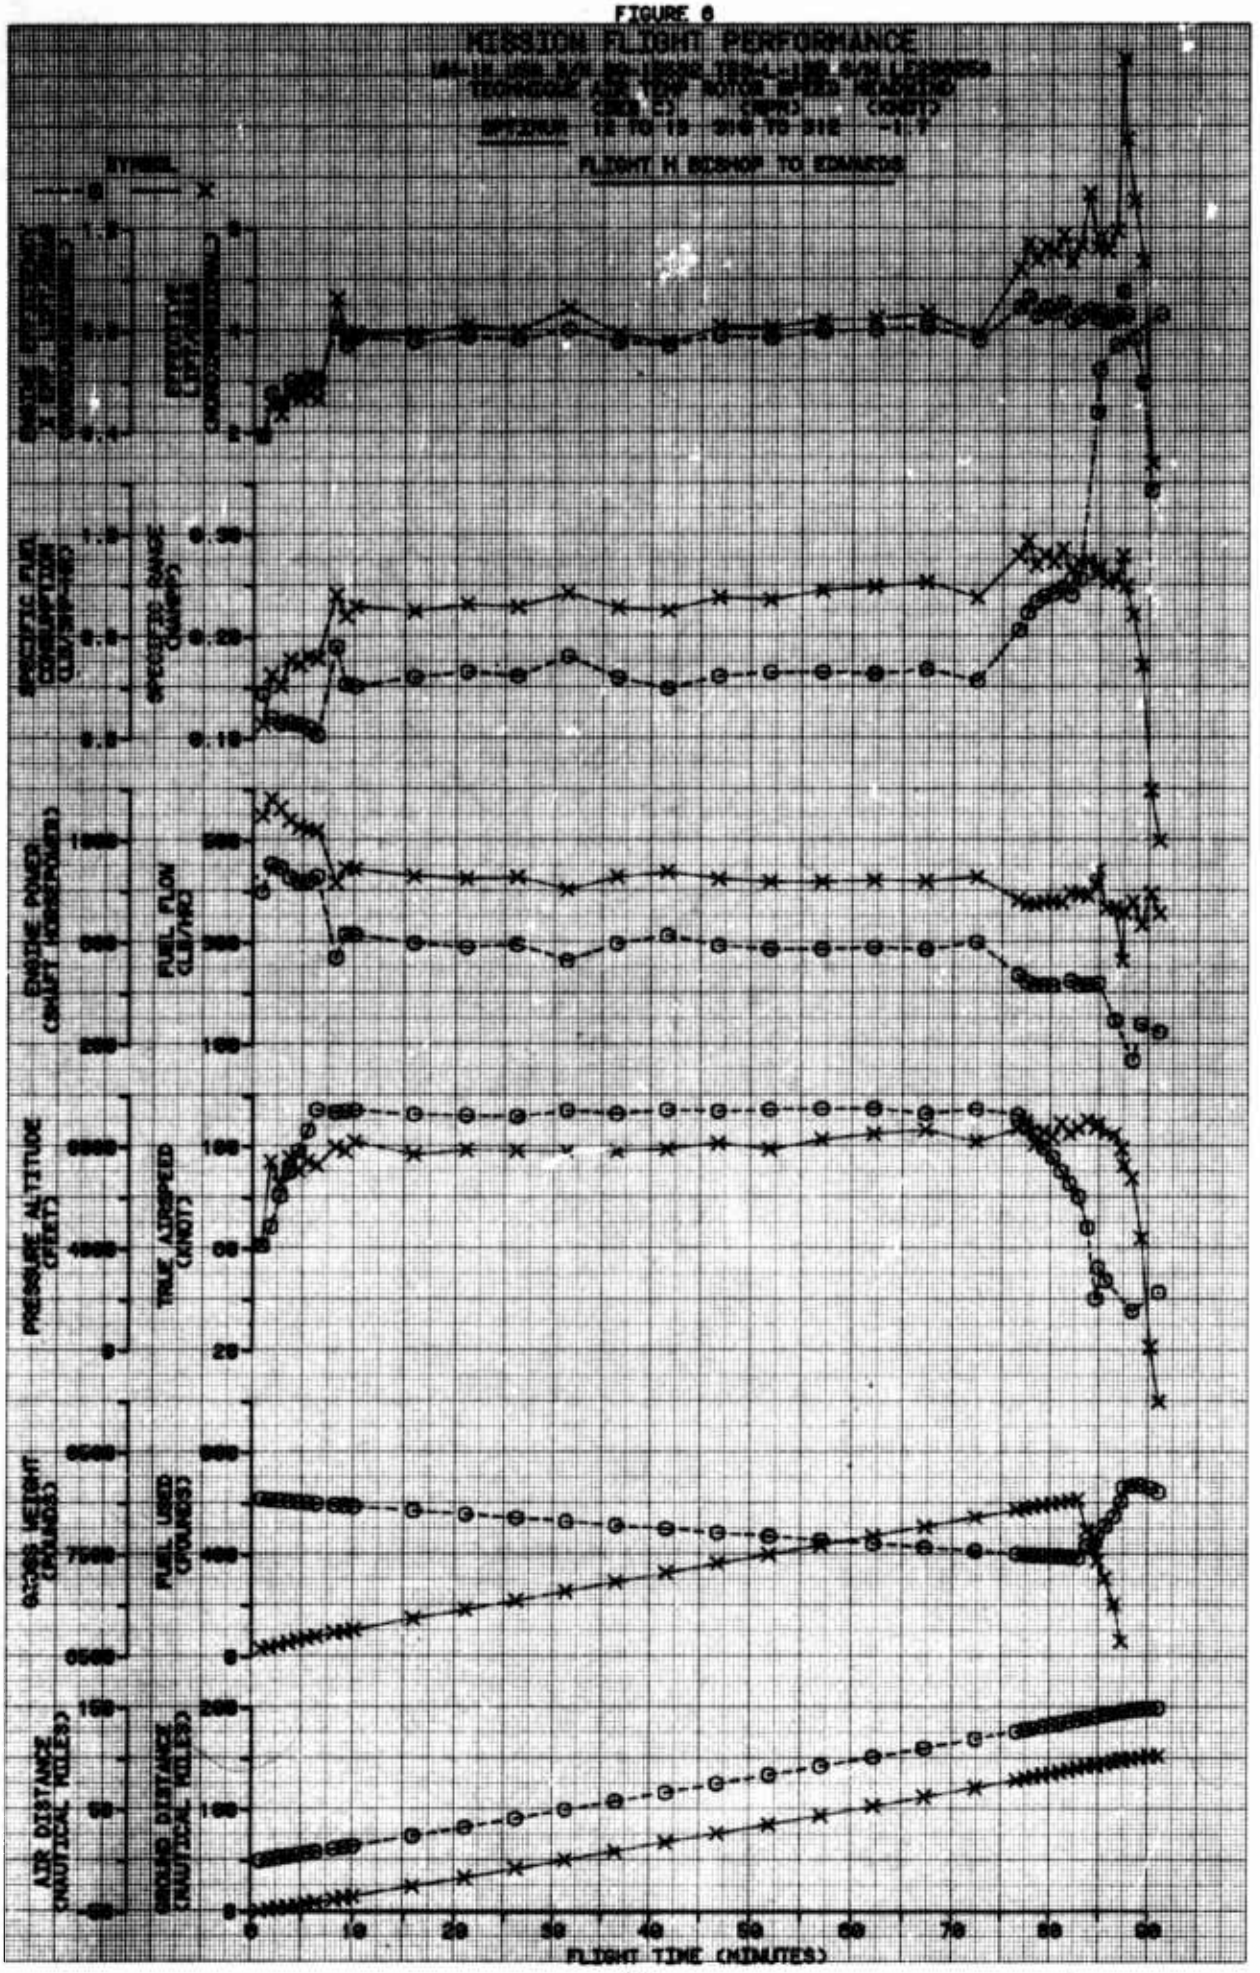

MISSION FLIGHT PERFORMANCE
FLIGHT H BISHOP TO EDWARDS
SYMBOL
FLIGHT TIME (MINUTES)

FIGURE 7

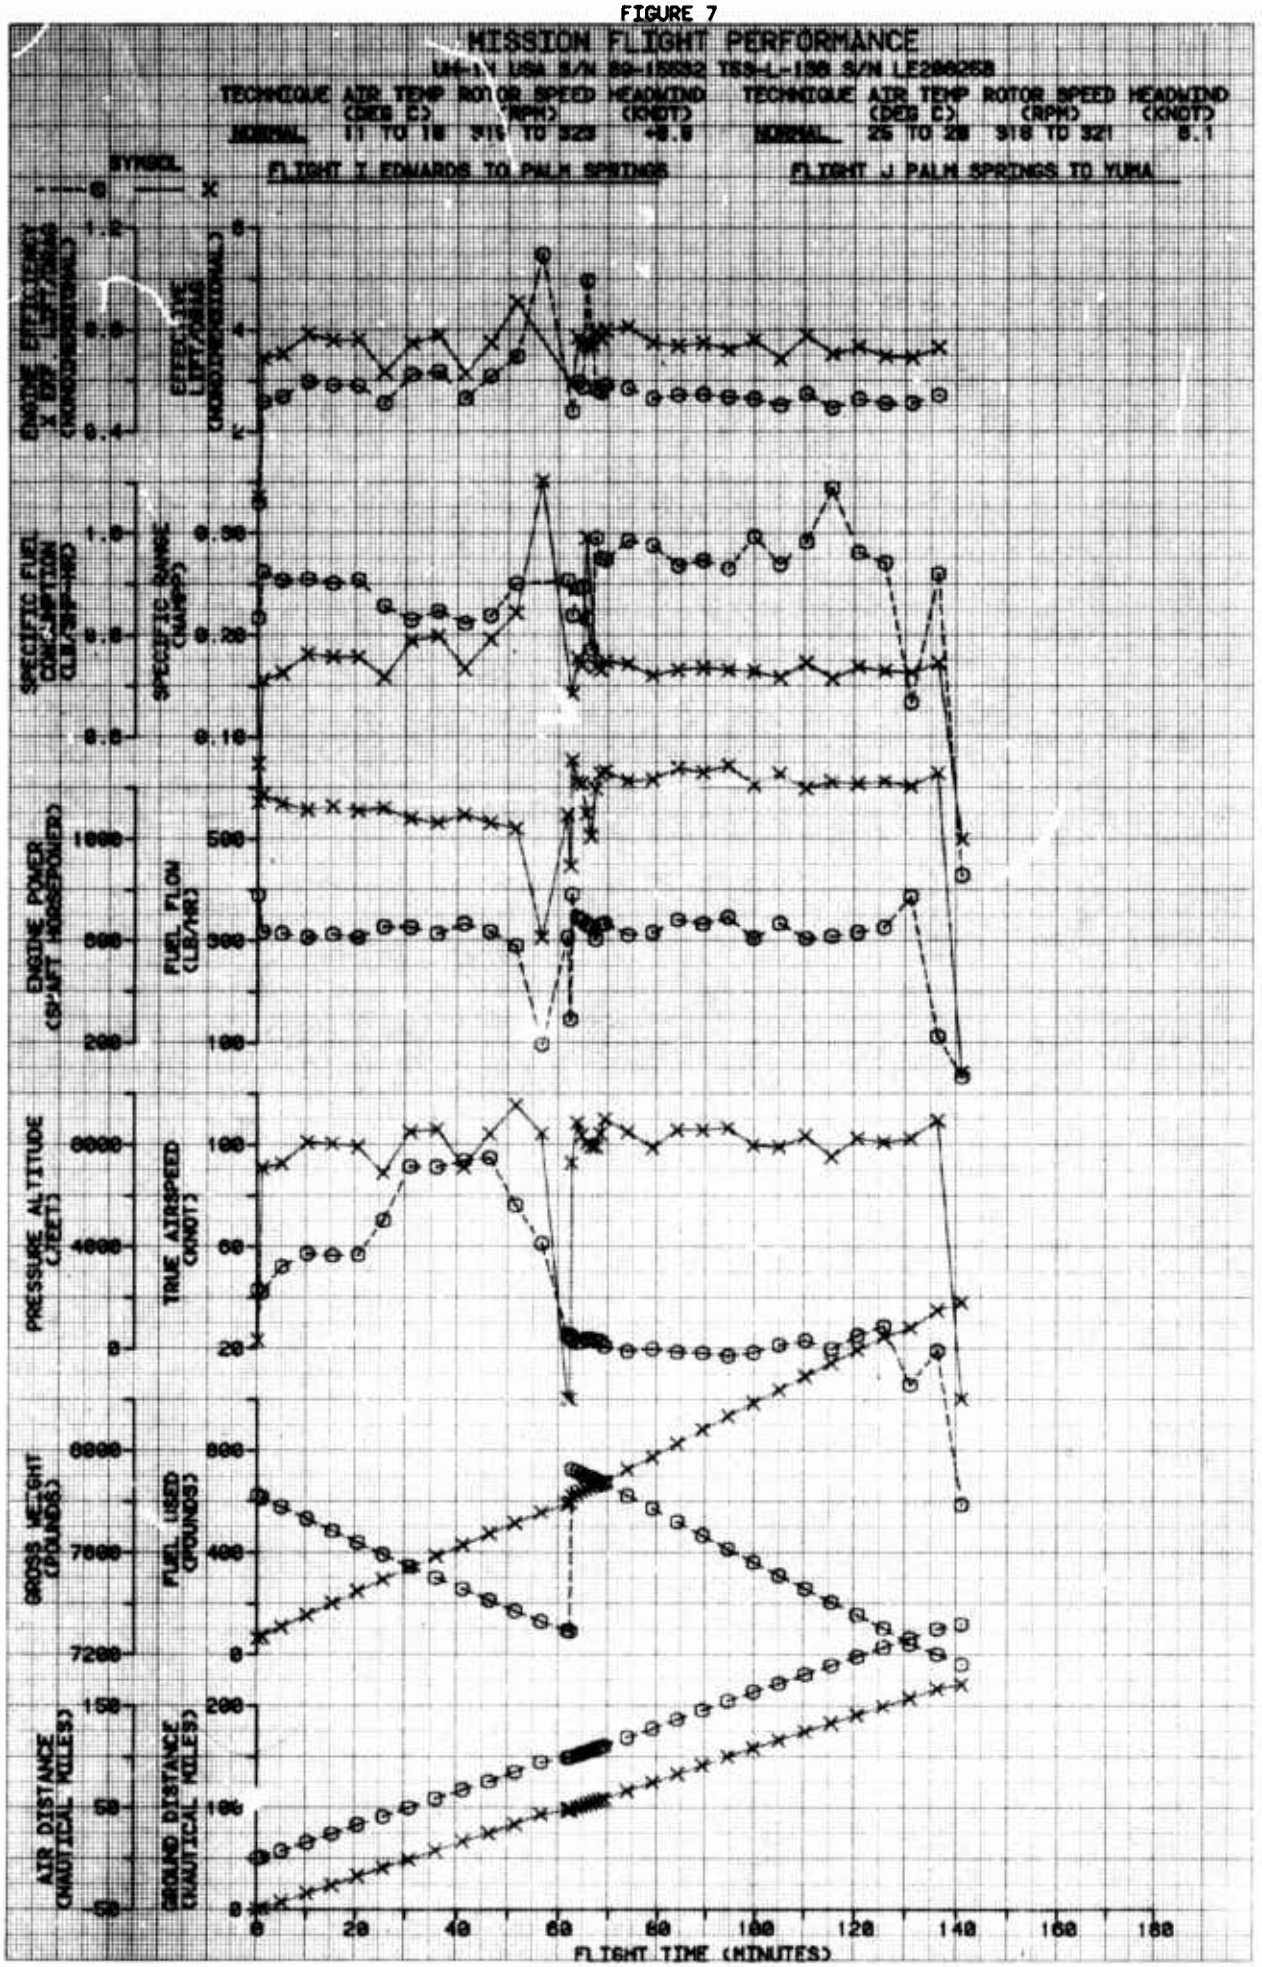

MISSION FLIGHT PERFORMANCE
UH-1Y USN S/N 89-15632 TSS-L-136 S/N LE286258
TECHNIQUE AIR TEMP (DEG C) ROTOR SPEED (RPM) HEADWIND (KNOT)
NORMAL 11 TO 18 319 TO 323 -8.6
TECHNIQUE AIR TEMP (DEG C) ROTOR SPEED (RPM) HEADWIND (KNOT)
NORMAL 25 TO 28 318 TO 321 8.1
SYMBOL
FLIGHT I EDWARDS TO PALM SPRINGS
FLIGHT J PALM SPRINGS TO YUMA
ENGINE EFFICIENCY (LB/HR/SHP) (NONDIMENSIONAL)
SPECIFIC RANGE (NAUT/LB) (NONDIMENSIONAL)
SPECIFIC FUEL CONSUMPTION (LB/HR/SHP)
SPECIFIC RANGE (NAUT/LB)
ENGINE POWER (SHAFT HORSEPOWER)
FUEL FLOW (LB/HR)
PRESSURE ALTITUDE (FEET)
TRUE AIRSPEED (KNOT)
GROSS WEIGHT (POUNDS)
FUEL USED (POUNDS)
AIR DISTANCE (NAUTICAL MILES)
GROUND DISTANCE (NAUTICAL MILES)
FLIGHT TIME (MINUTES)

FIGURE 8

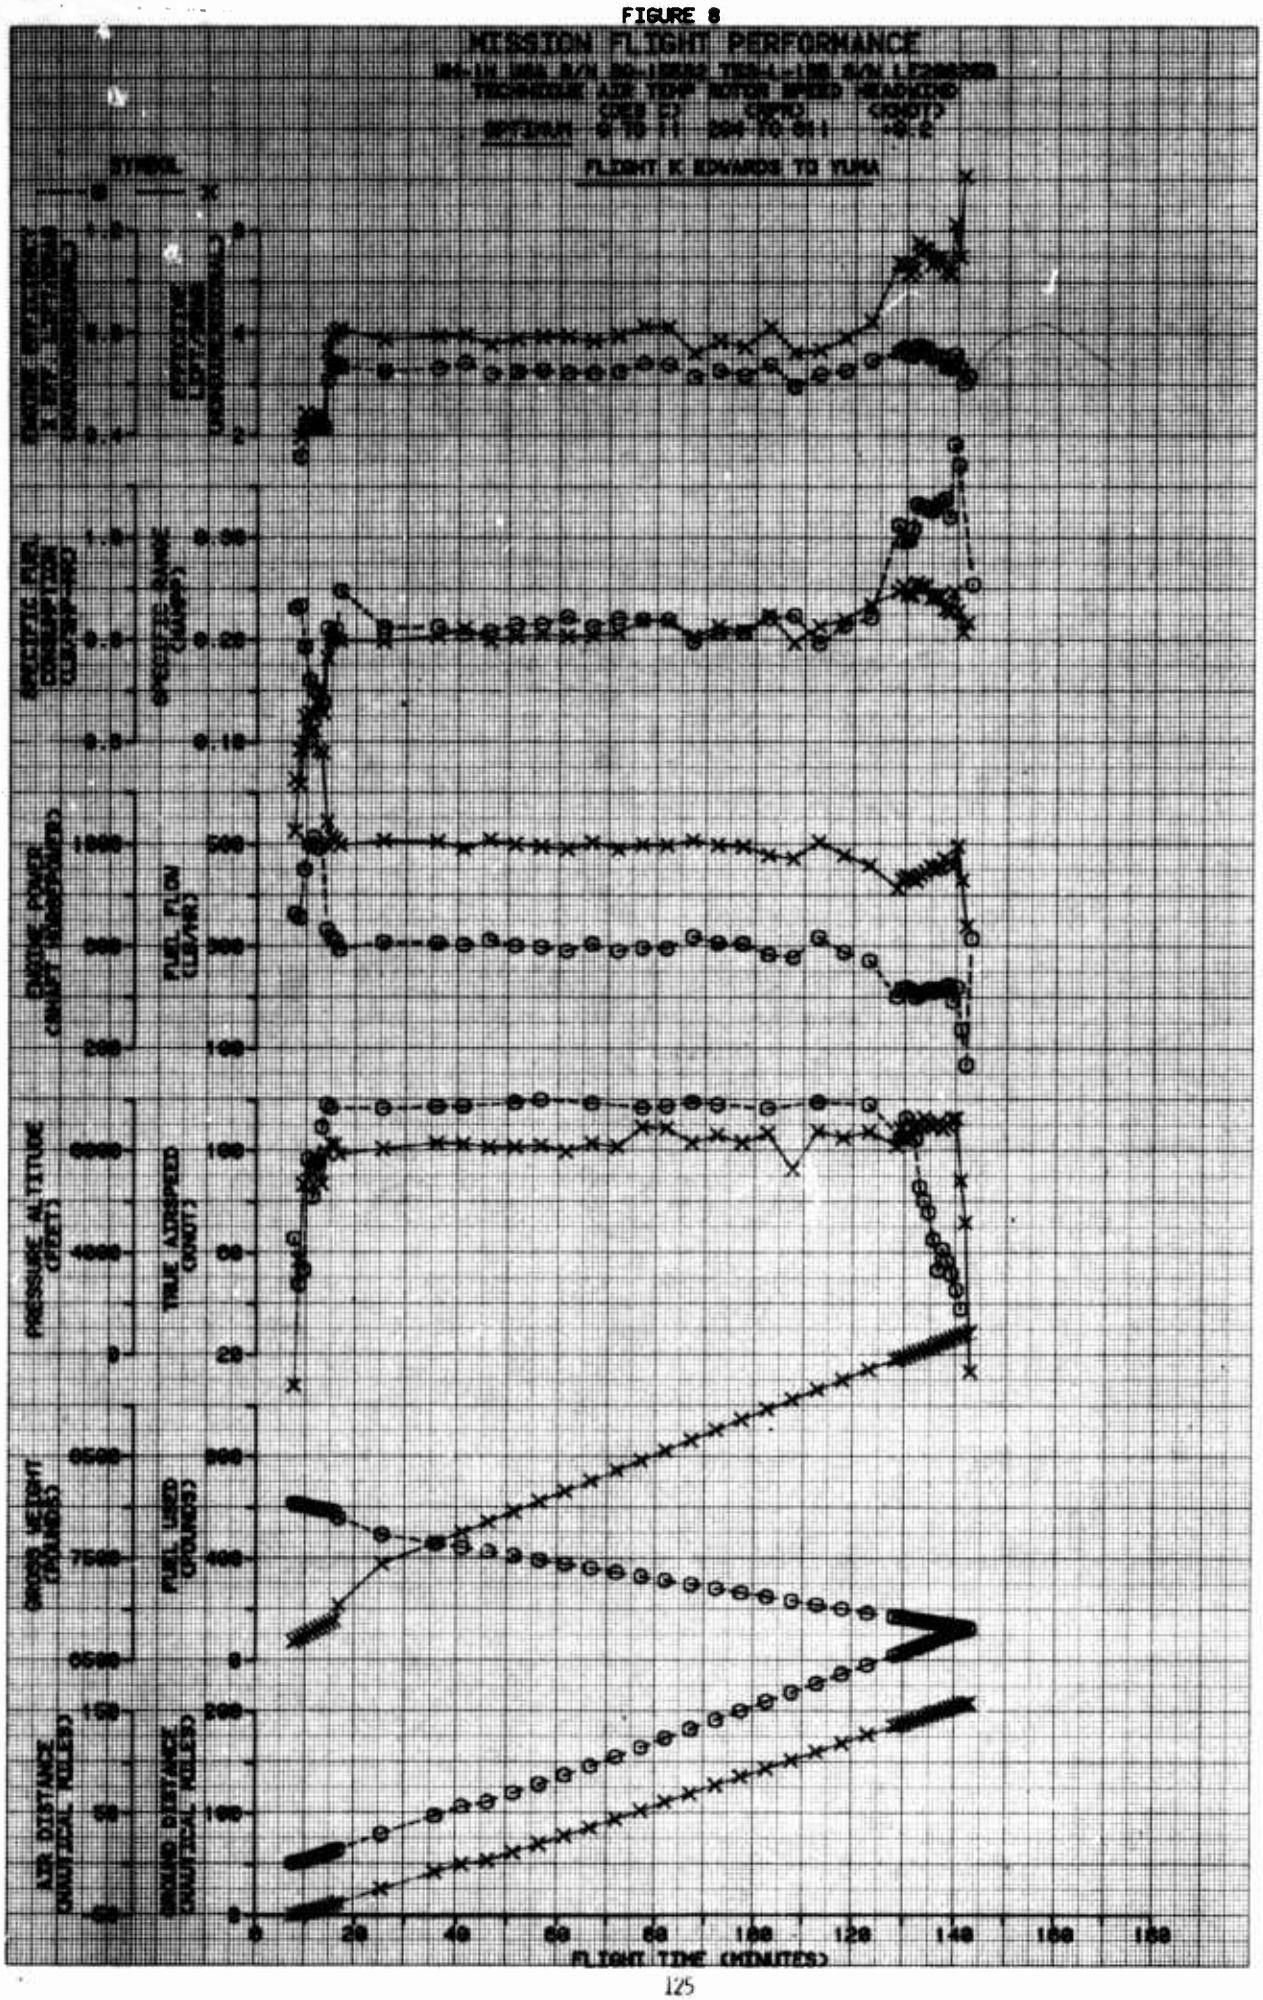

MISSION FLIGHT PERFORMANCE
FLIGHT K EDWARDS TO YUMA
SYMBOL
FLIGHT TIME (MINUTES)

FIGURE 9

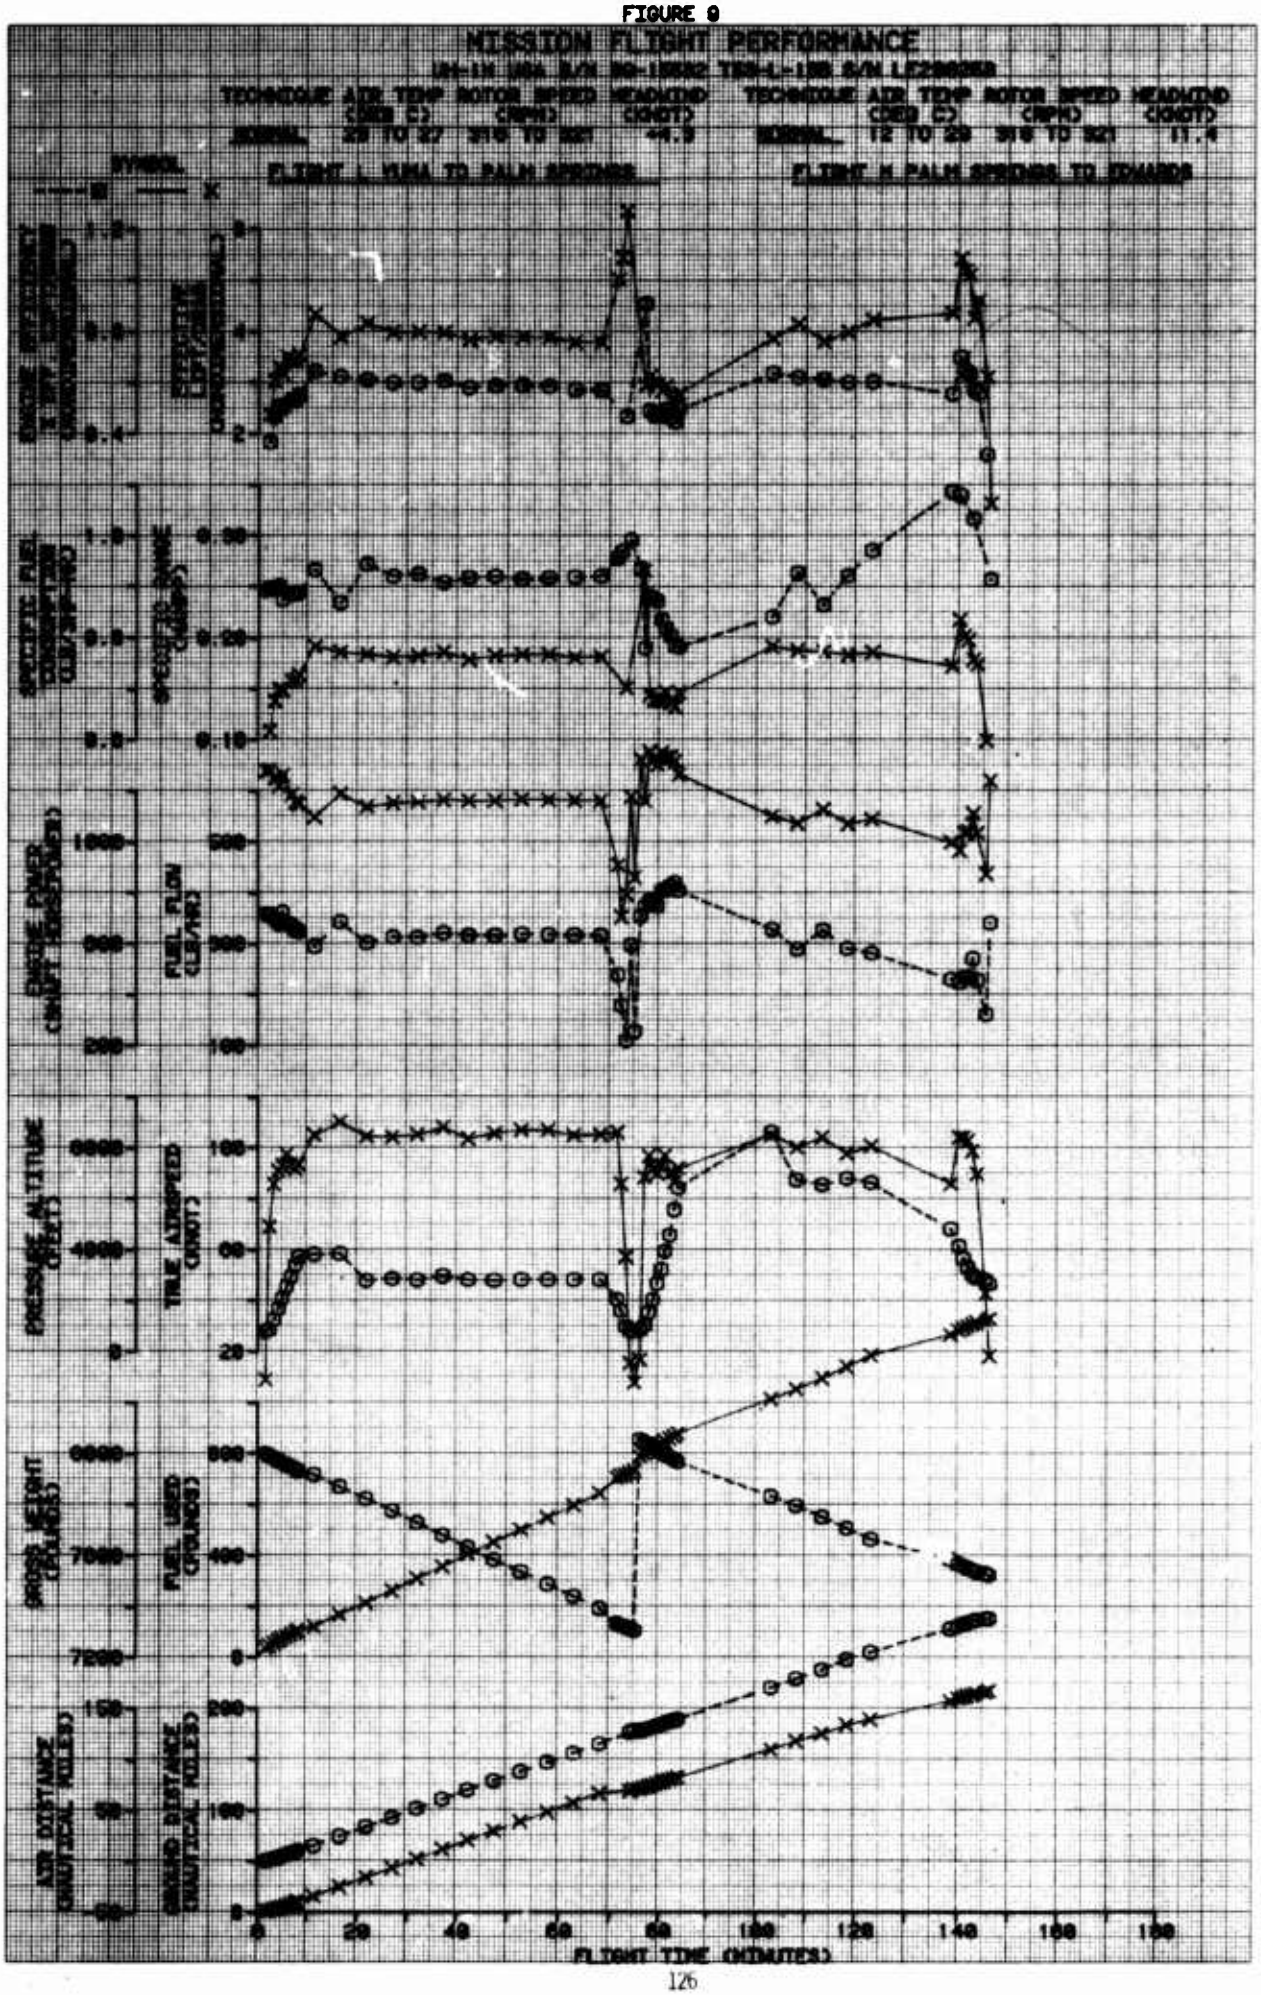

MISSION FLIGHT PERFORMANCE
FLIGHT L YUMA TO PALM SPRINGS
FLIGHT M PALM SPRINGS TO EDWARDS
SYMBOL
FUEL FLOW (LB/HR)
TRUE AIRSPEED (KNOT)
PRESSURE ALTITUDE (FEET)
GROSS WEIGHT (POUNDS)
FUEL USED (POUNDS)
AIR DISTANCE (NAUTICAL MILES)
GROUND DISTANCE (NAUTICAL MILES)
FLIGHT TIME (MINUTES)

FIGURE 10

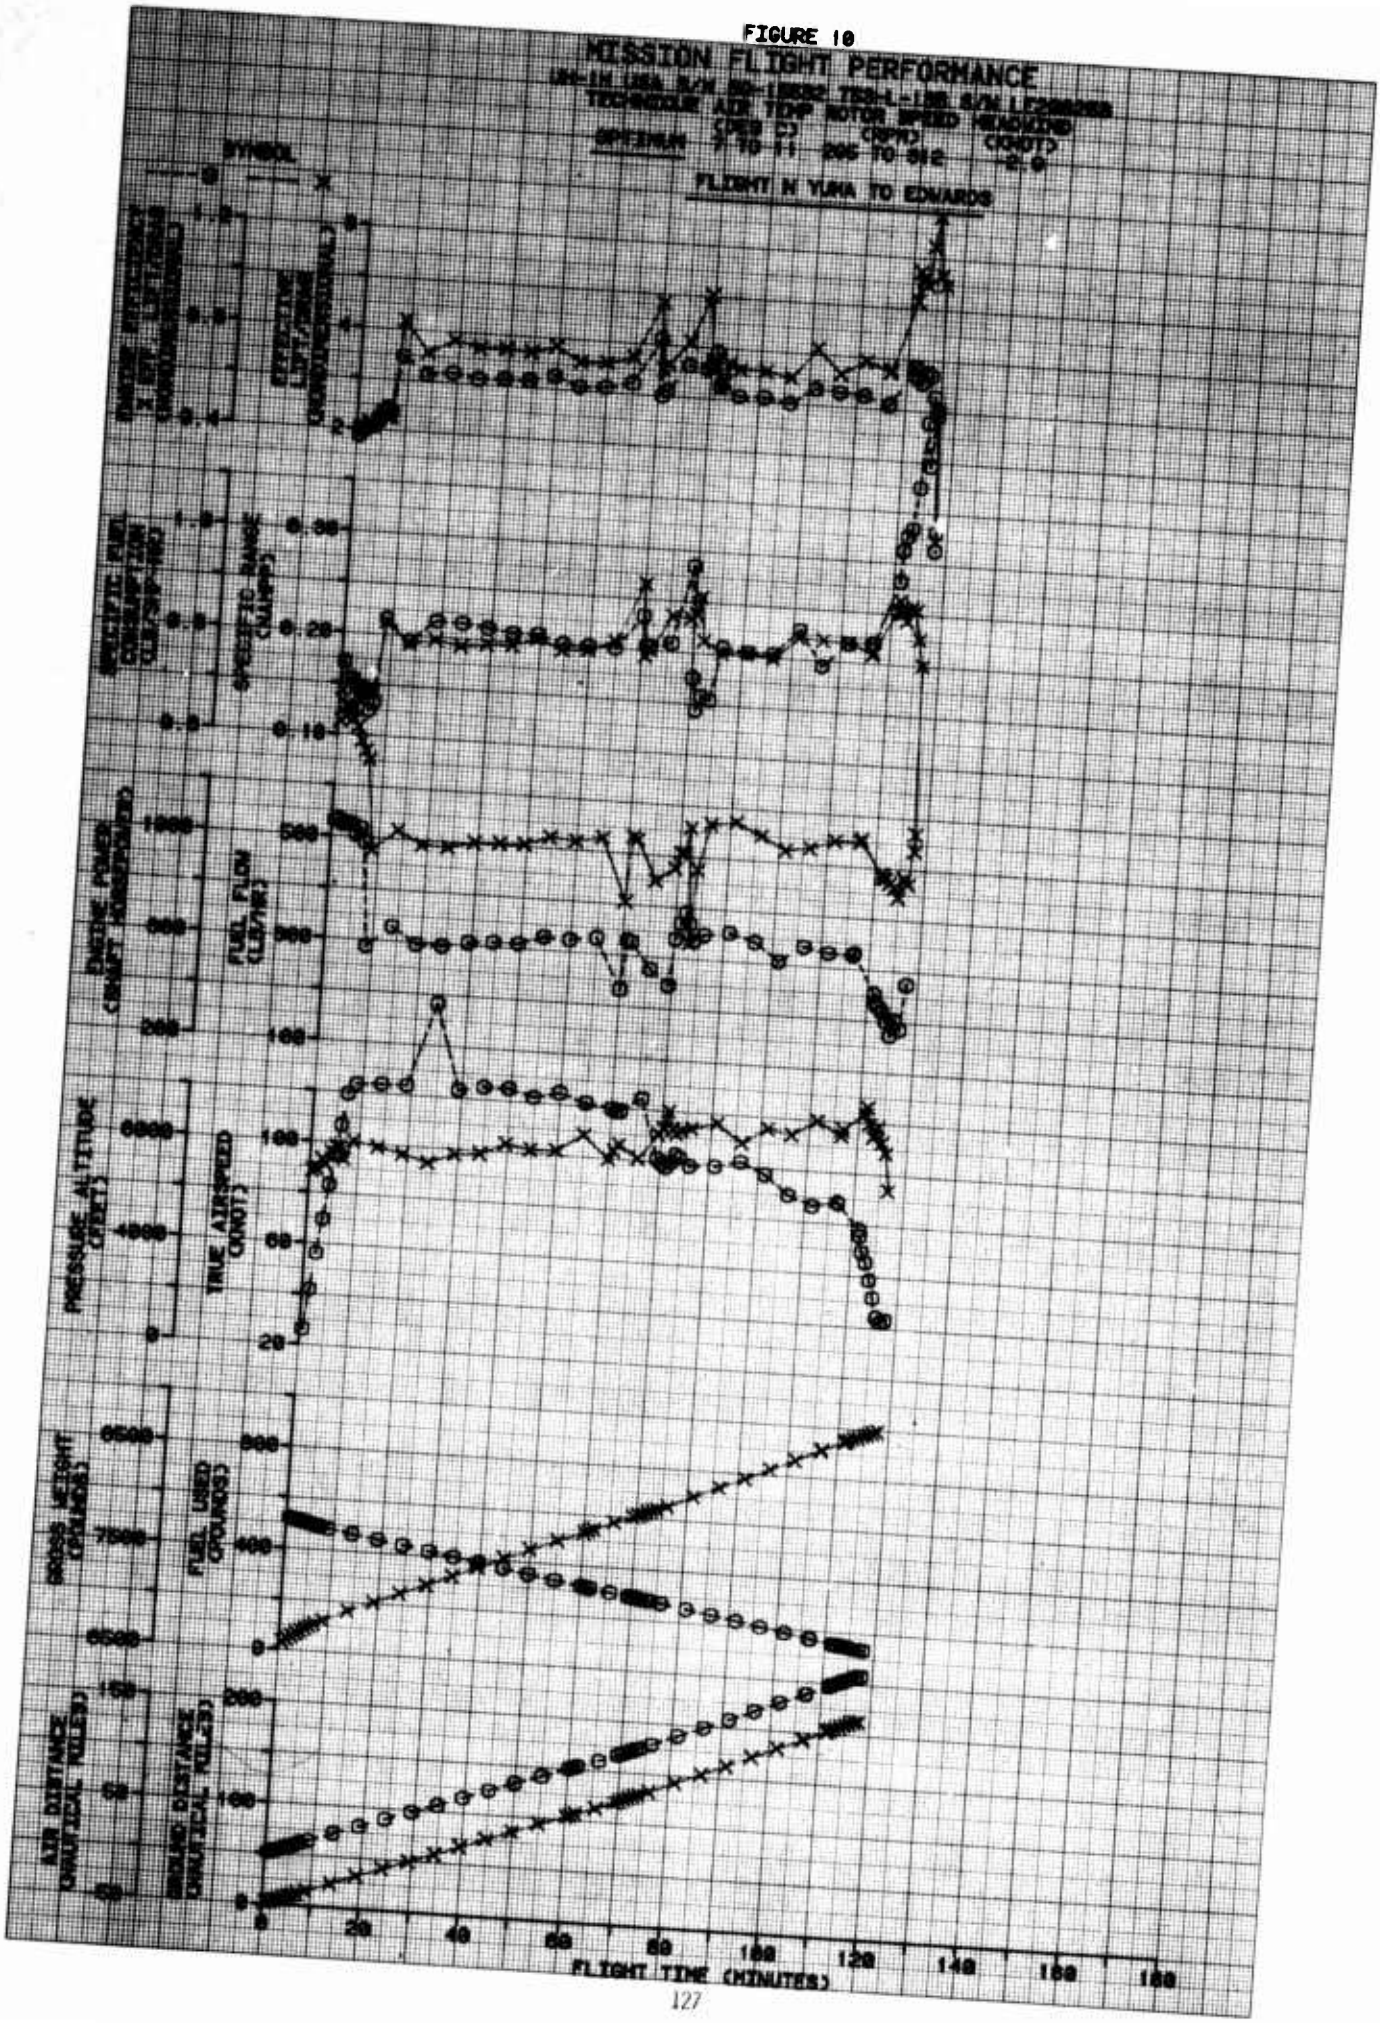

MISSION FLIGHT PERFORMANCE
FLIGHT N YUMA TO EDWARDS
SYMBOL
FLIGHT TIME (MINUTES)

FIGURE 11

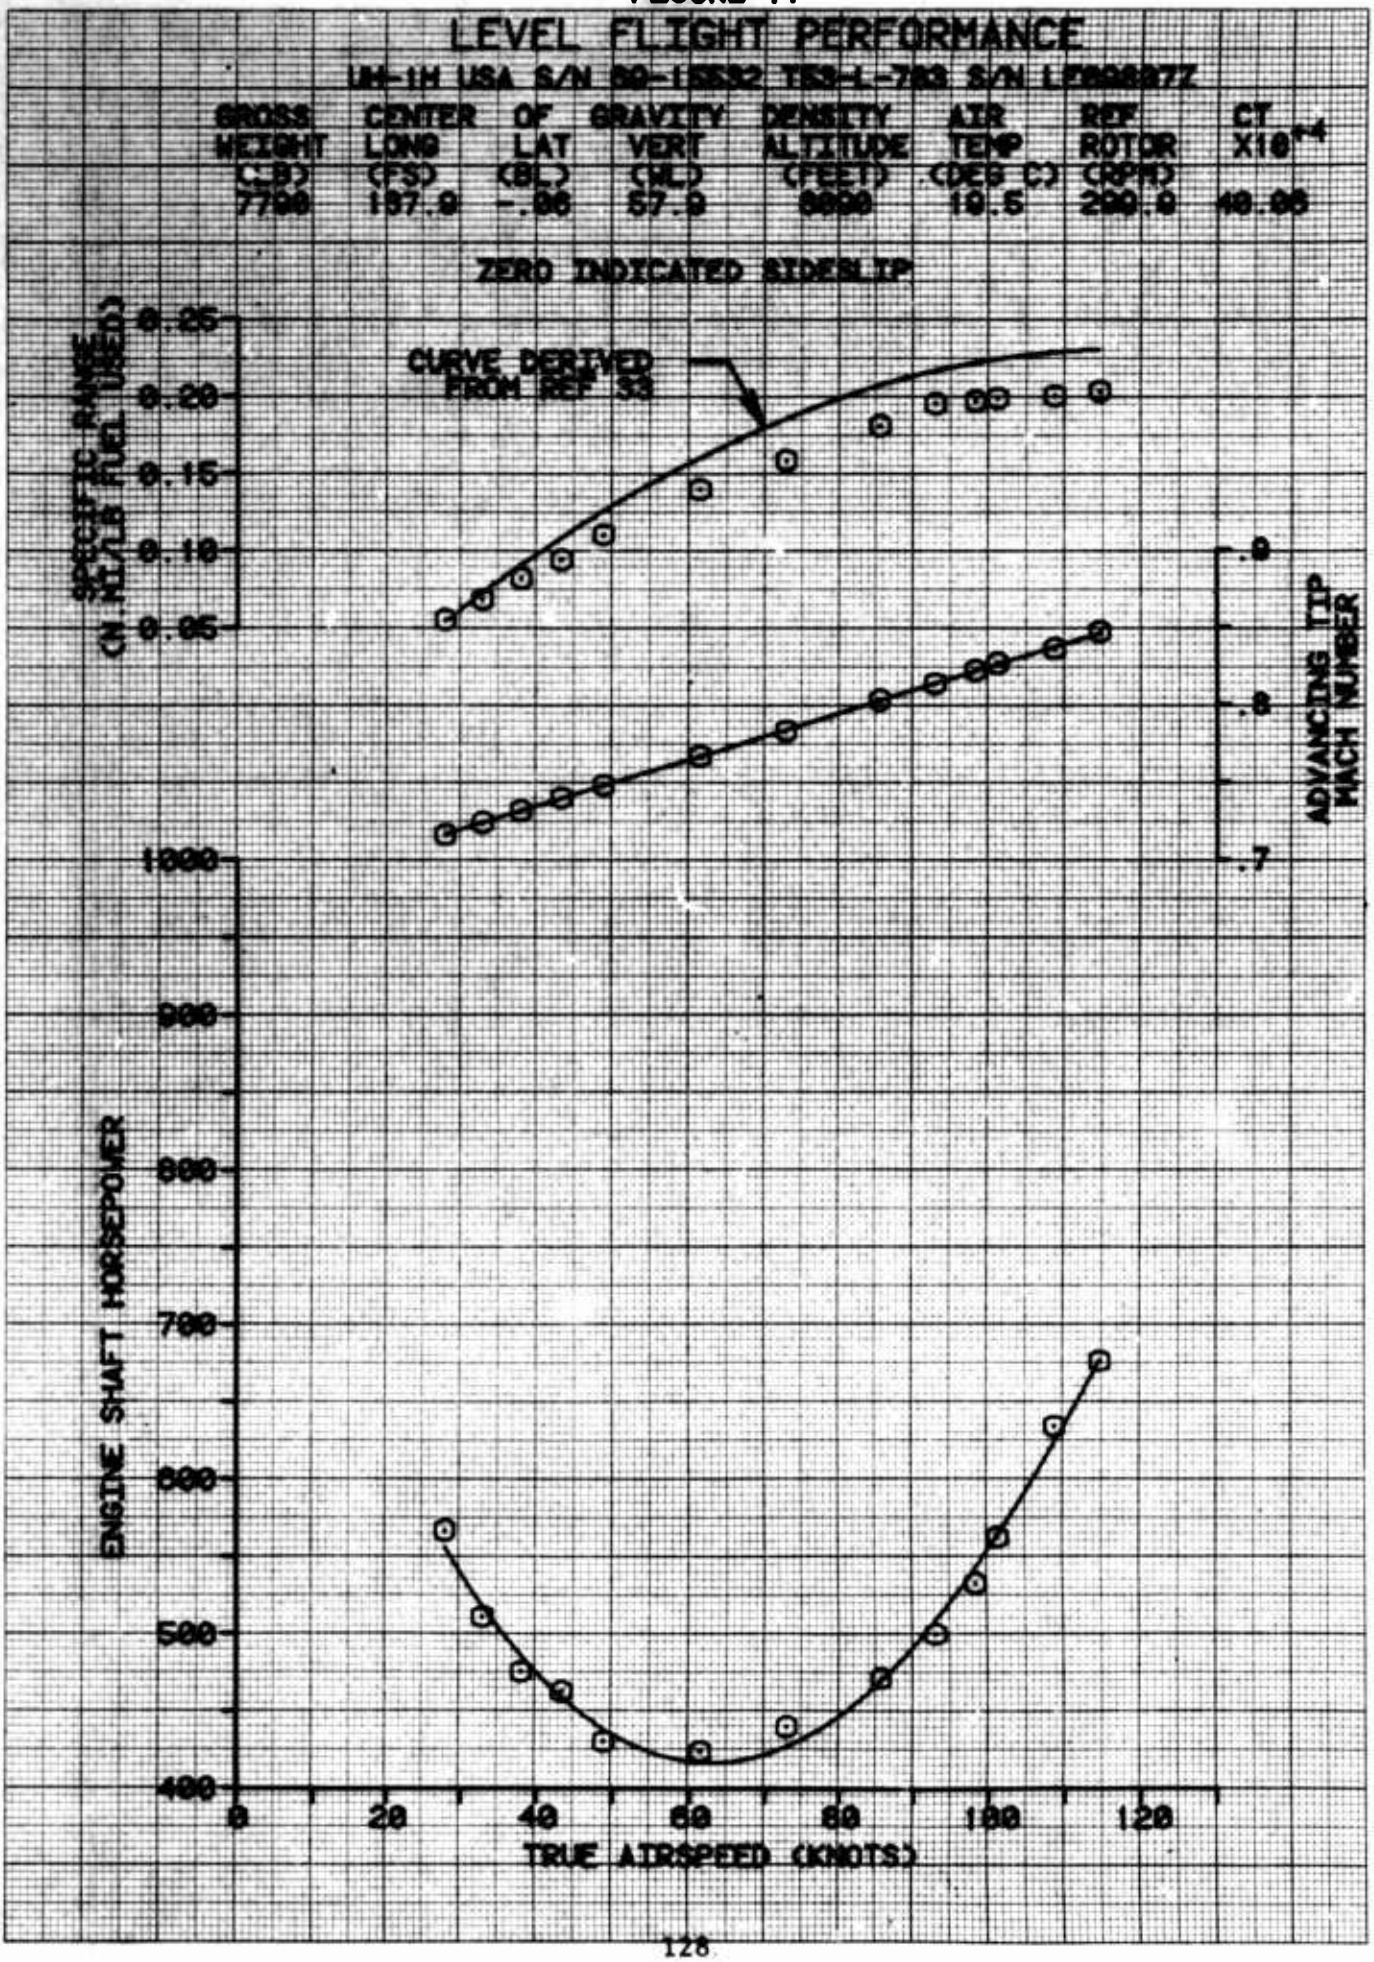

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 66-16532 T53-L-703 S/N LE
GROSS WEIGHT (LB) 7700
CENTER OF GRAVITY LONG (FS) 197.9
LAT (BL) -.86
VERT (WL) 57.9
DENSITY ALTITUDE (FEET) 6000
AIR TEMP (DEG C) 10.5
REF ROTOR (RPM) 290.0
CT X10**4 40.00
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC RANGE (N.M./LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 12

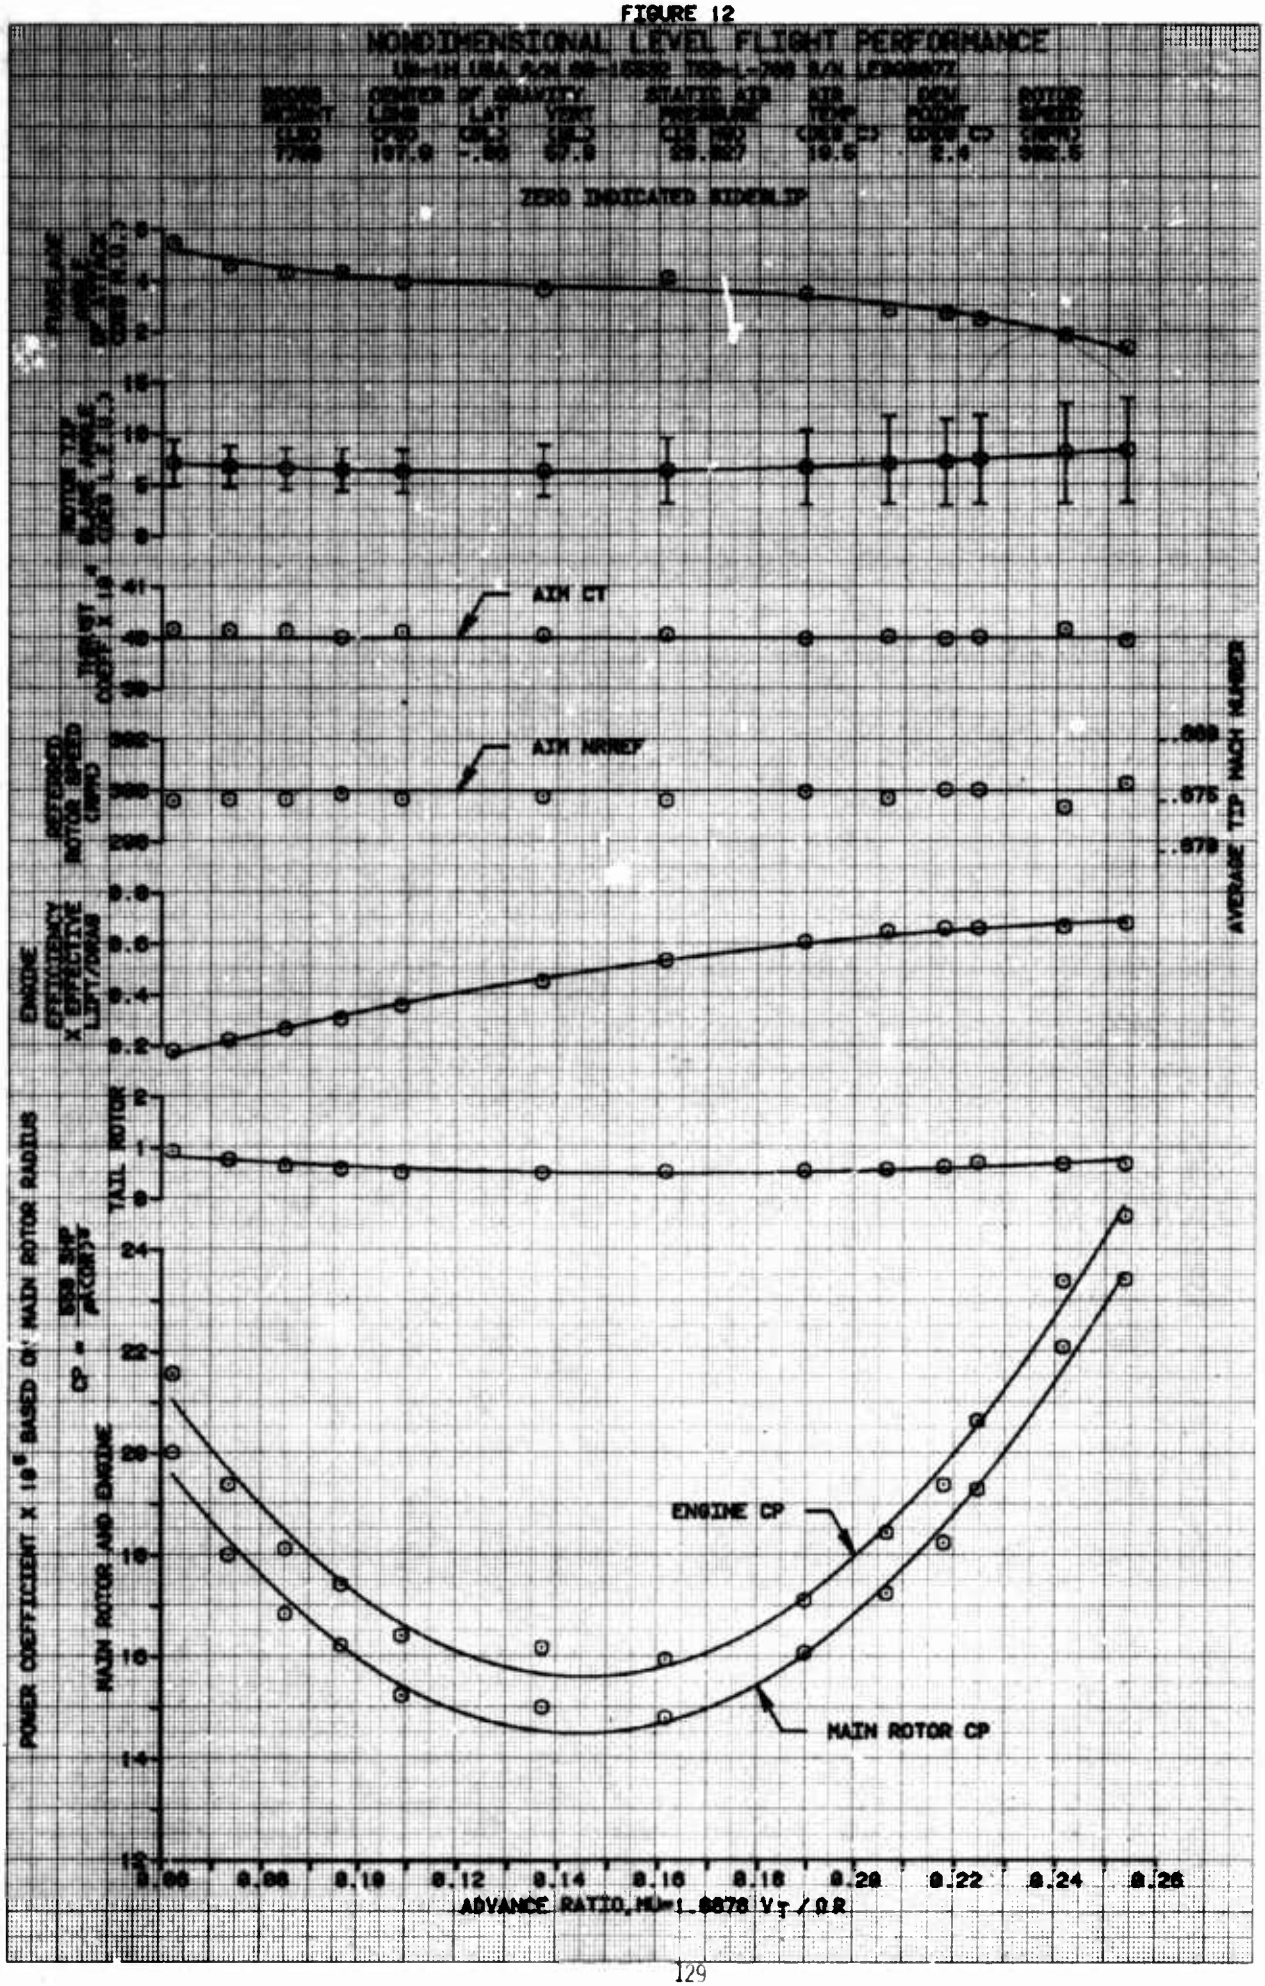

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIM CT
AIM MRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
.669
.675
.679
POWER COEFFICIENT X 10⁶ BASED ON MAIN ROTOR RADIUS
MAIN ROTOR AND ENGINE
TAIL ROTOR
ADVANCE RATIO, MU=1.0878 V∞ / ΩR

FIGURE 13

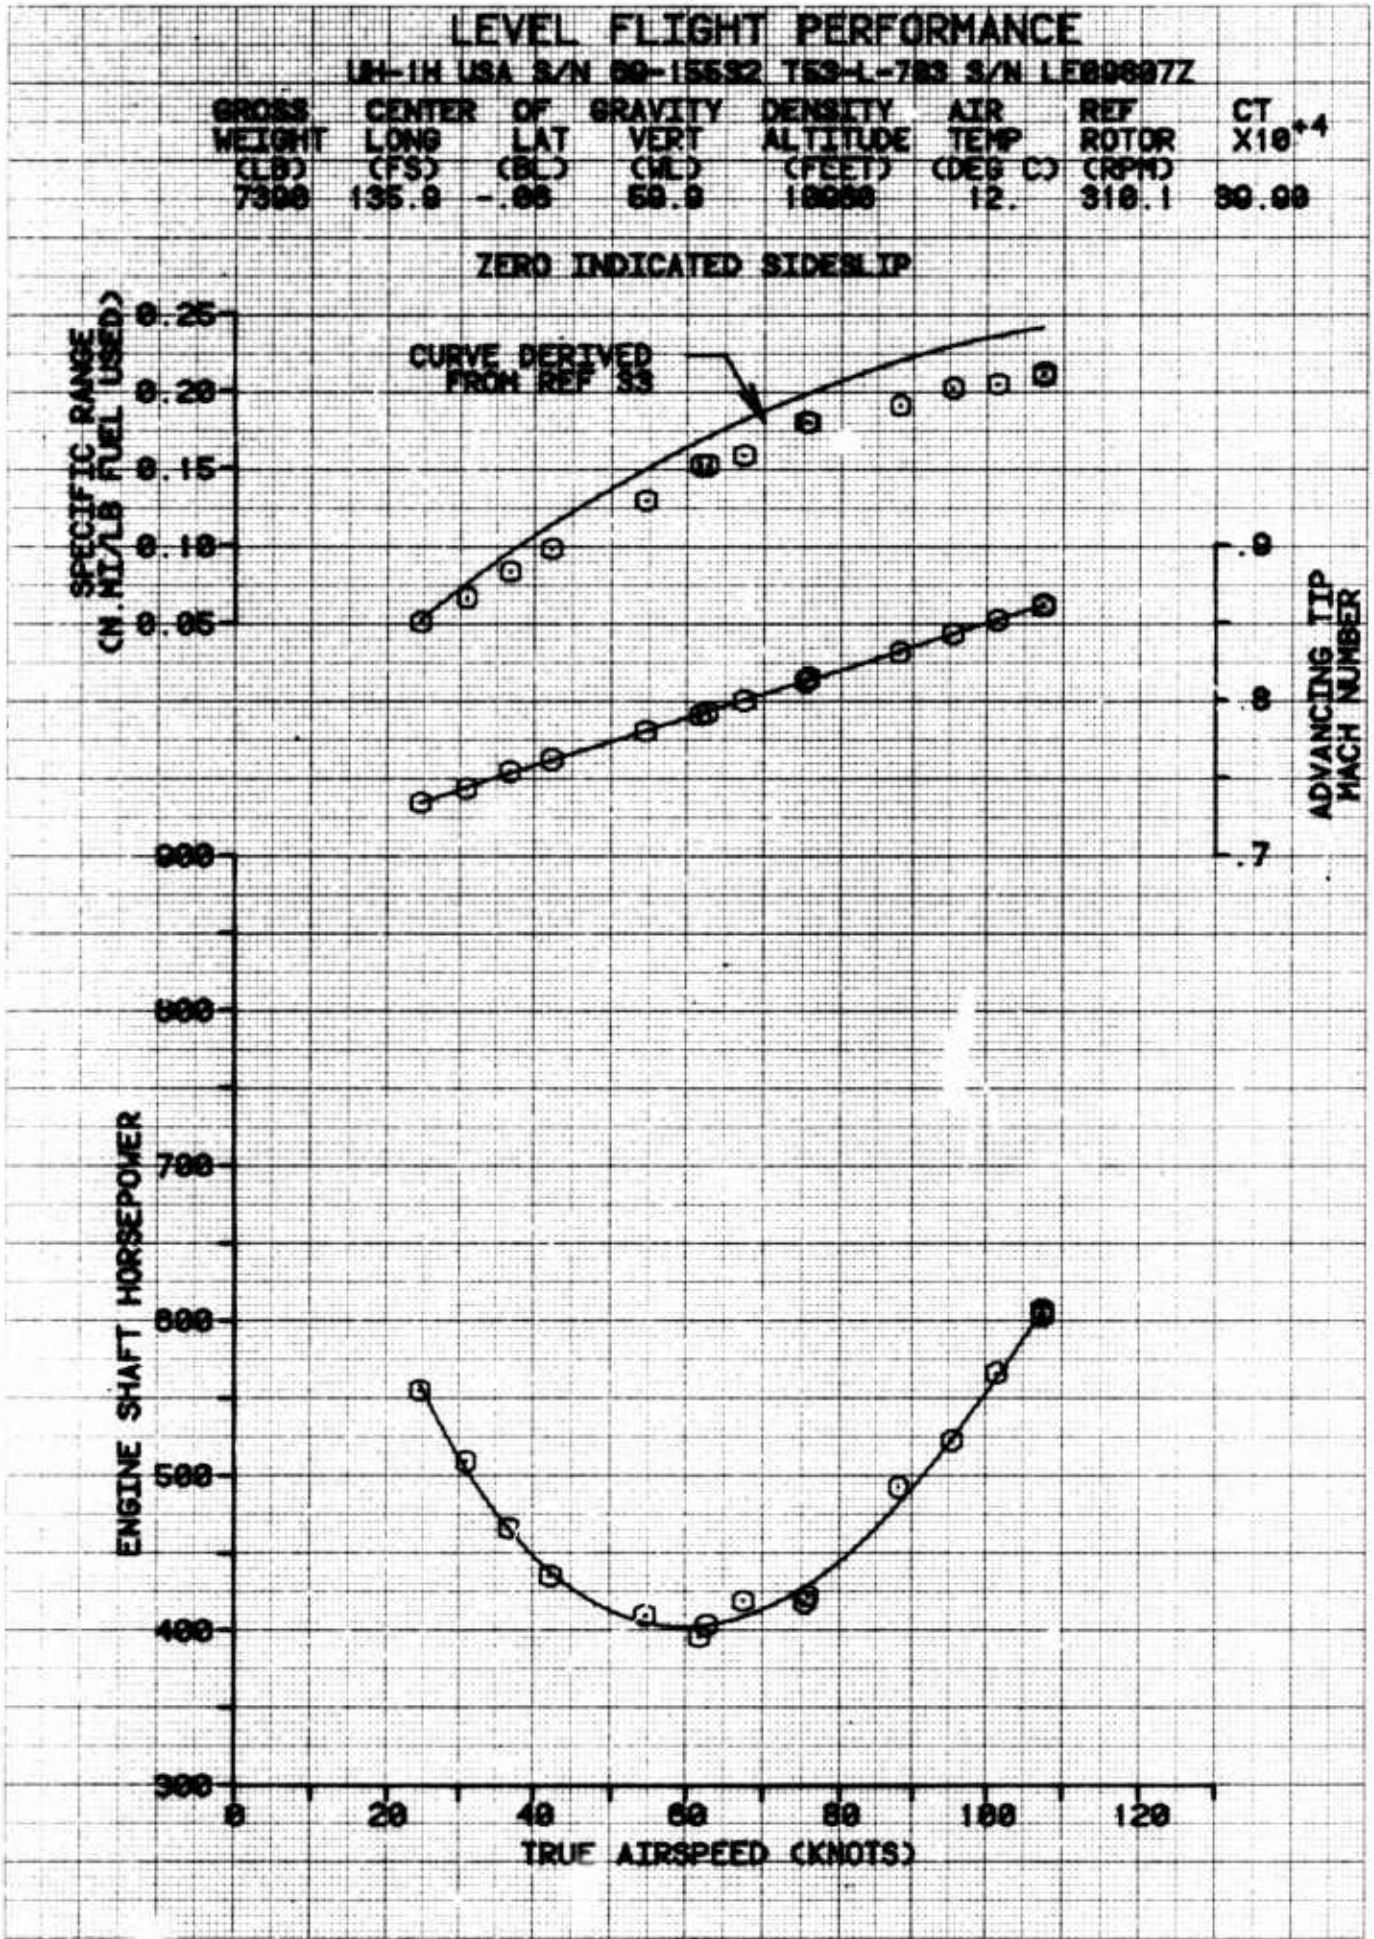

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15592 T53-L-703 S/N LE609077
GROSS WEIGHT (LB) 7300
CENTER OF GRAVITY LONG (FS) 135.9
LAT (BL) -.88
VERT (WL) 69.9
DENSITY ALTITUDE (FEET) 10000
AIR TEMP (DEG C) 12.
REF ROTOR (RPM) 310.1
CT X10**4 90.90
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHAFT HORSEPOWER
900
800
700
600
500
400
300
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 14

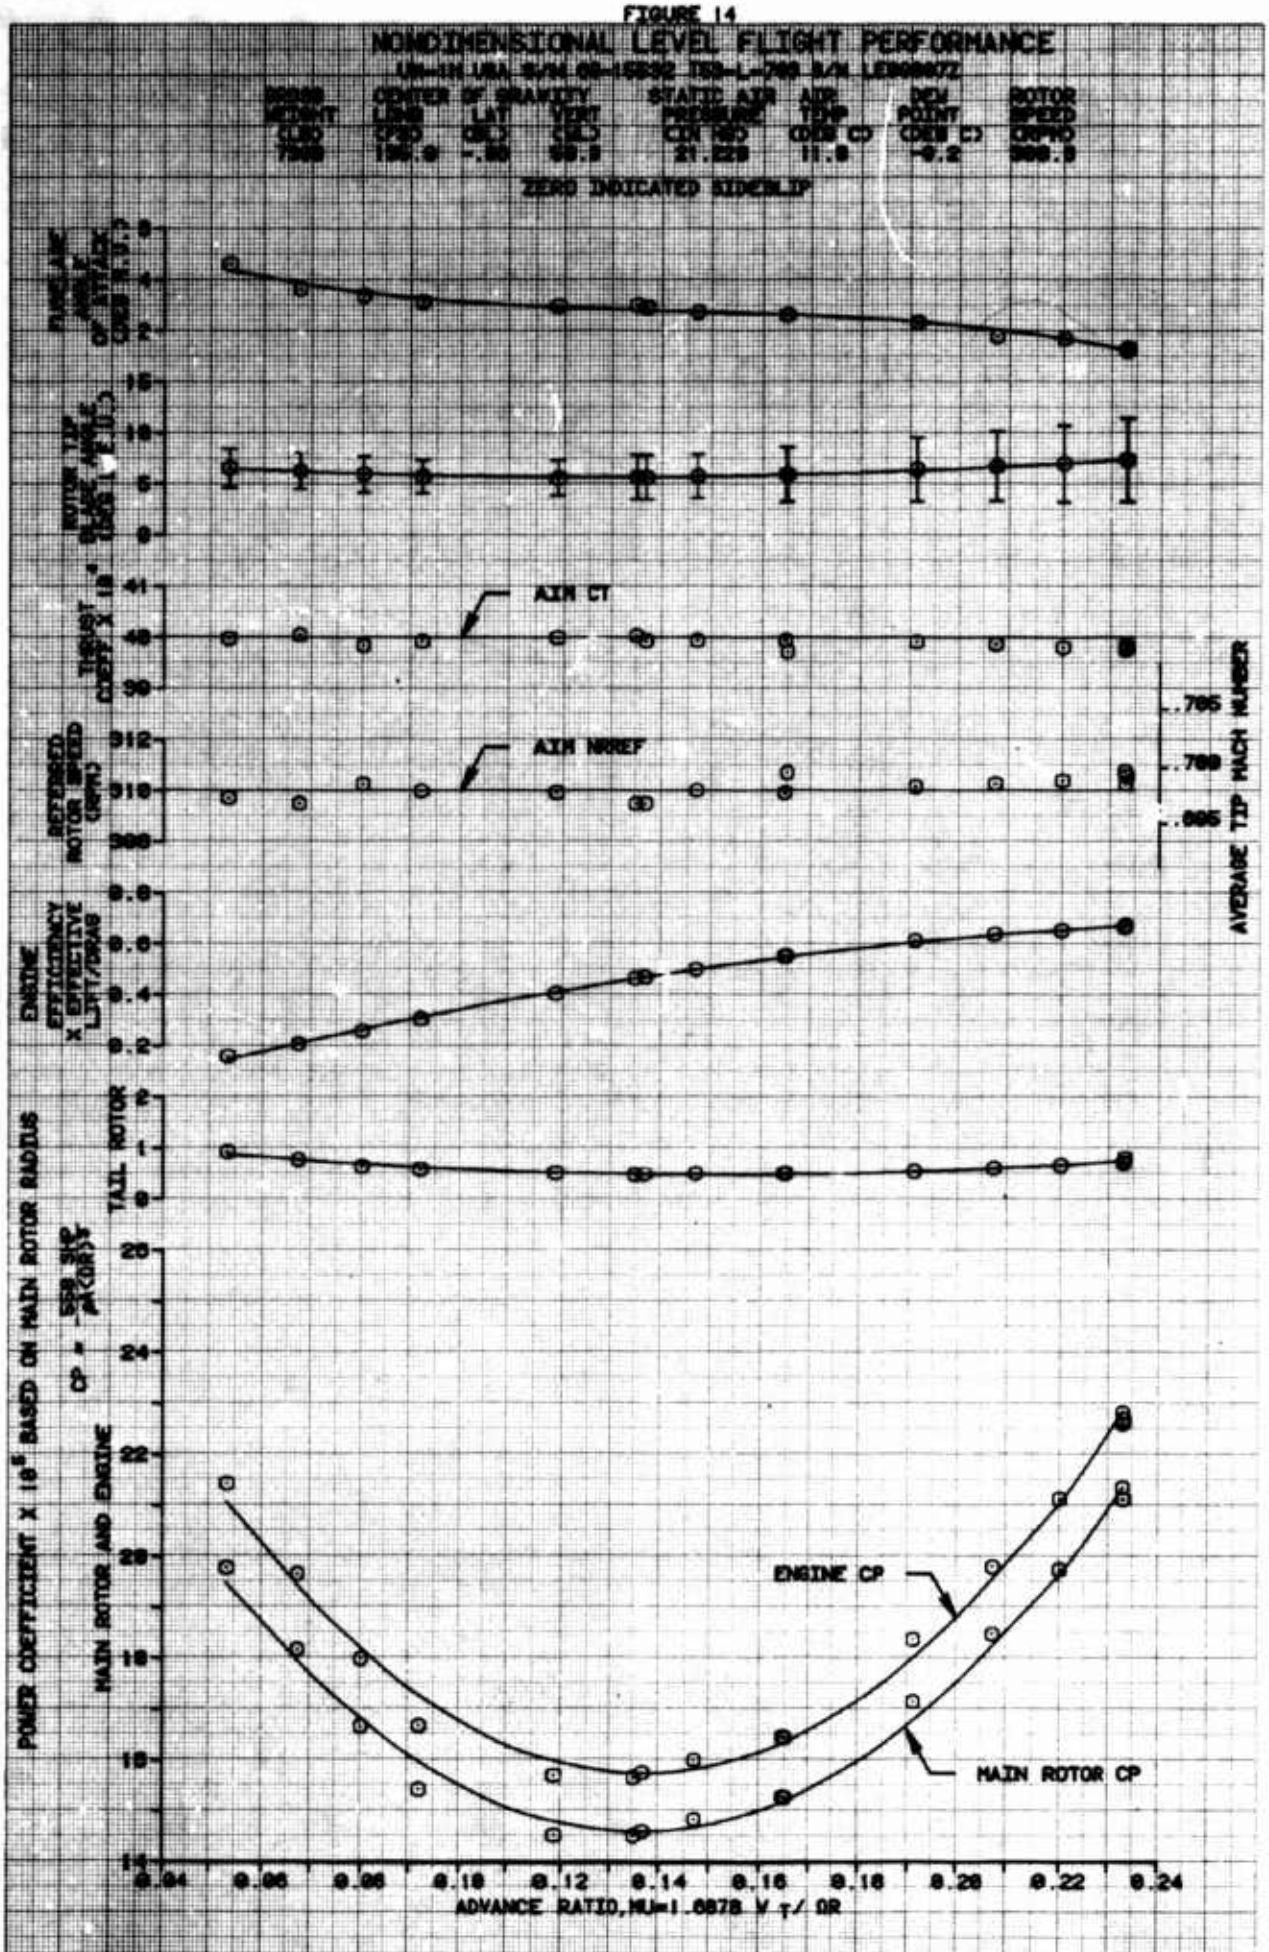

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN NRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
.705
.700
.695
TAIL ROTOR
MAIN ROTOR AND ENGINE
POWER COEFFICIENT X 10⁵ BASED ON MAIN ROTOR RADIUS
ADVANCE RATIO, MU=1.687B V T/ ΩR

FIGURE 15

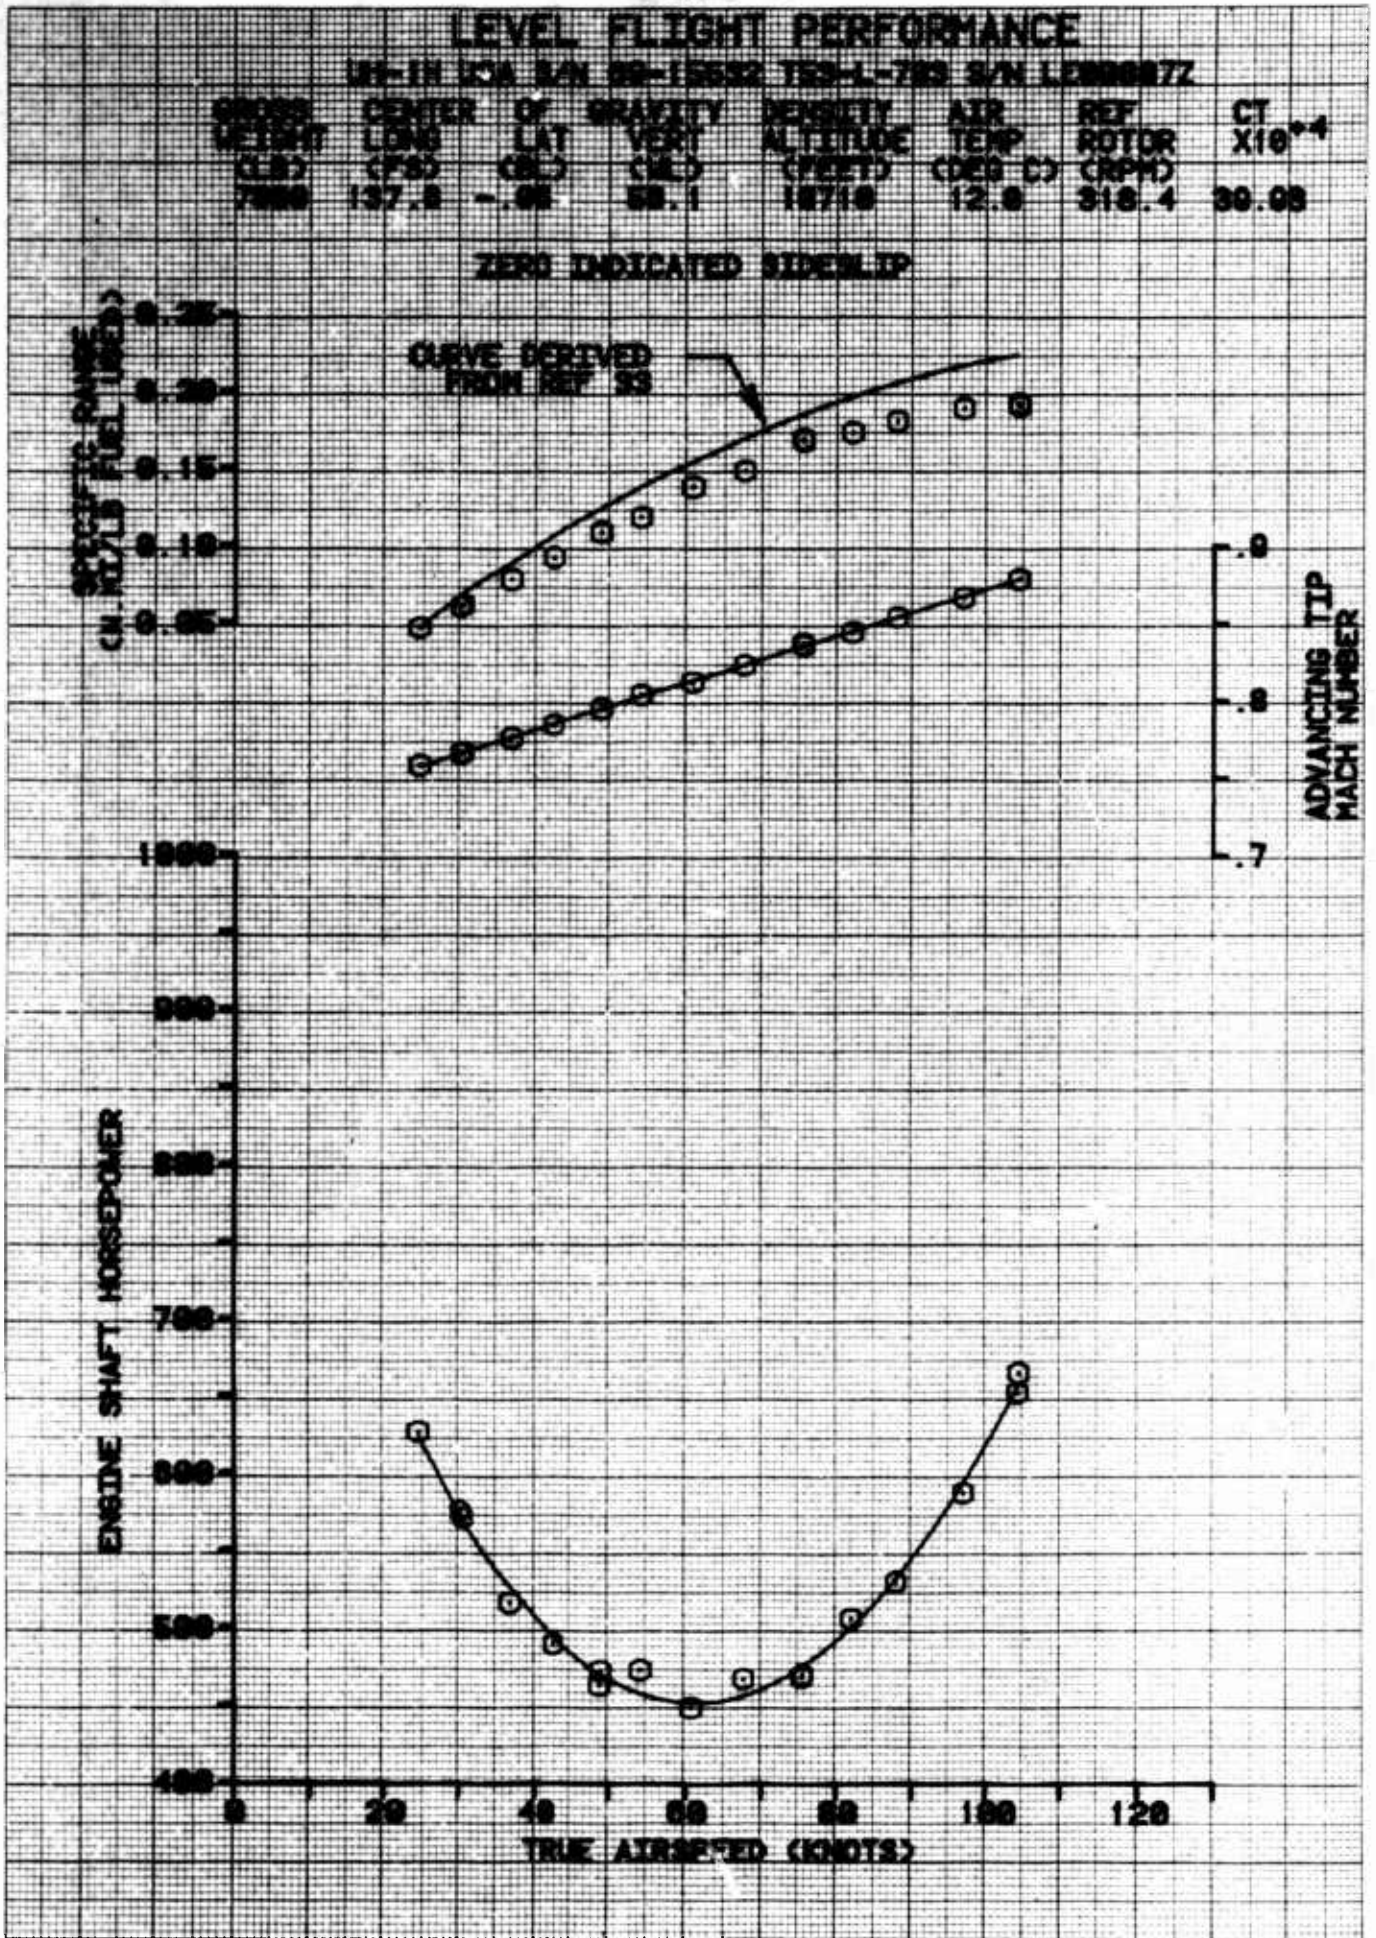

LEVEL FLIGHT PERFORMANCE
GROSS WEIGHT (LB)
CENTER OF GRAVITY LONG (FS)
CENTER OF GRAVITY LAT (BL)
CENTER OF GRAVITY VERT (WL)
DENSITY ALTITUDE (FEET)
AIR TEMP (DEG C)
REF ROTOR (RPM)
CT X10**4
7000
137.8
-.05
58.1
10710
12.8
318.4
30.08
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC FUEL CONSUMPTION (LB/HR/SHP)
ENGINE SHAFT HORSEPOWER
TRUE AIRSPEED (KNOTS)
ADVANCING TIP MACH NUMBER

FIGURE 16

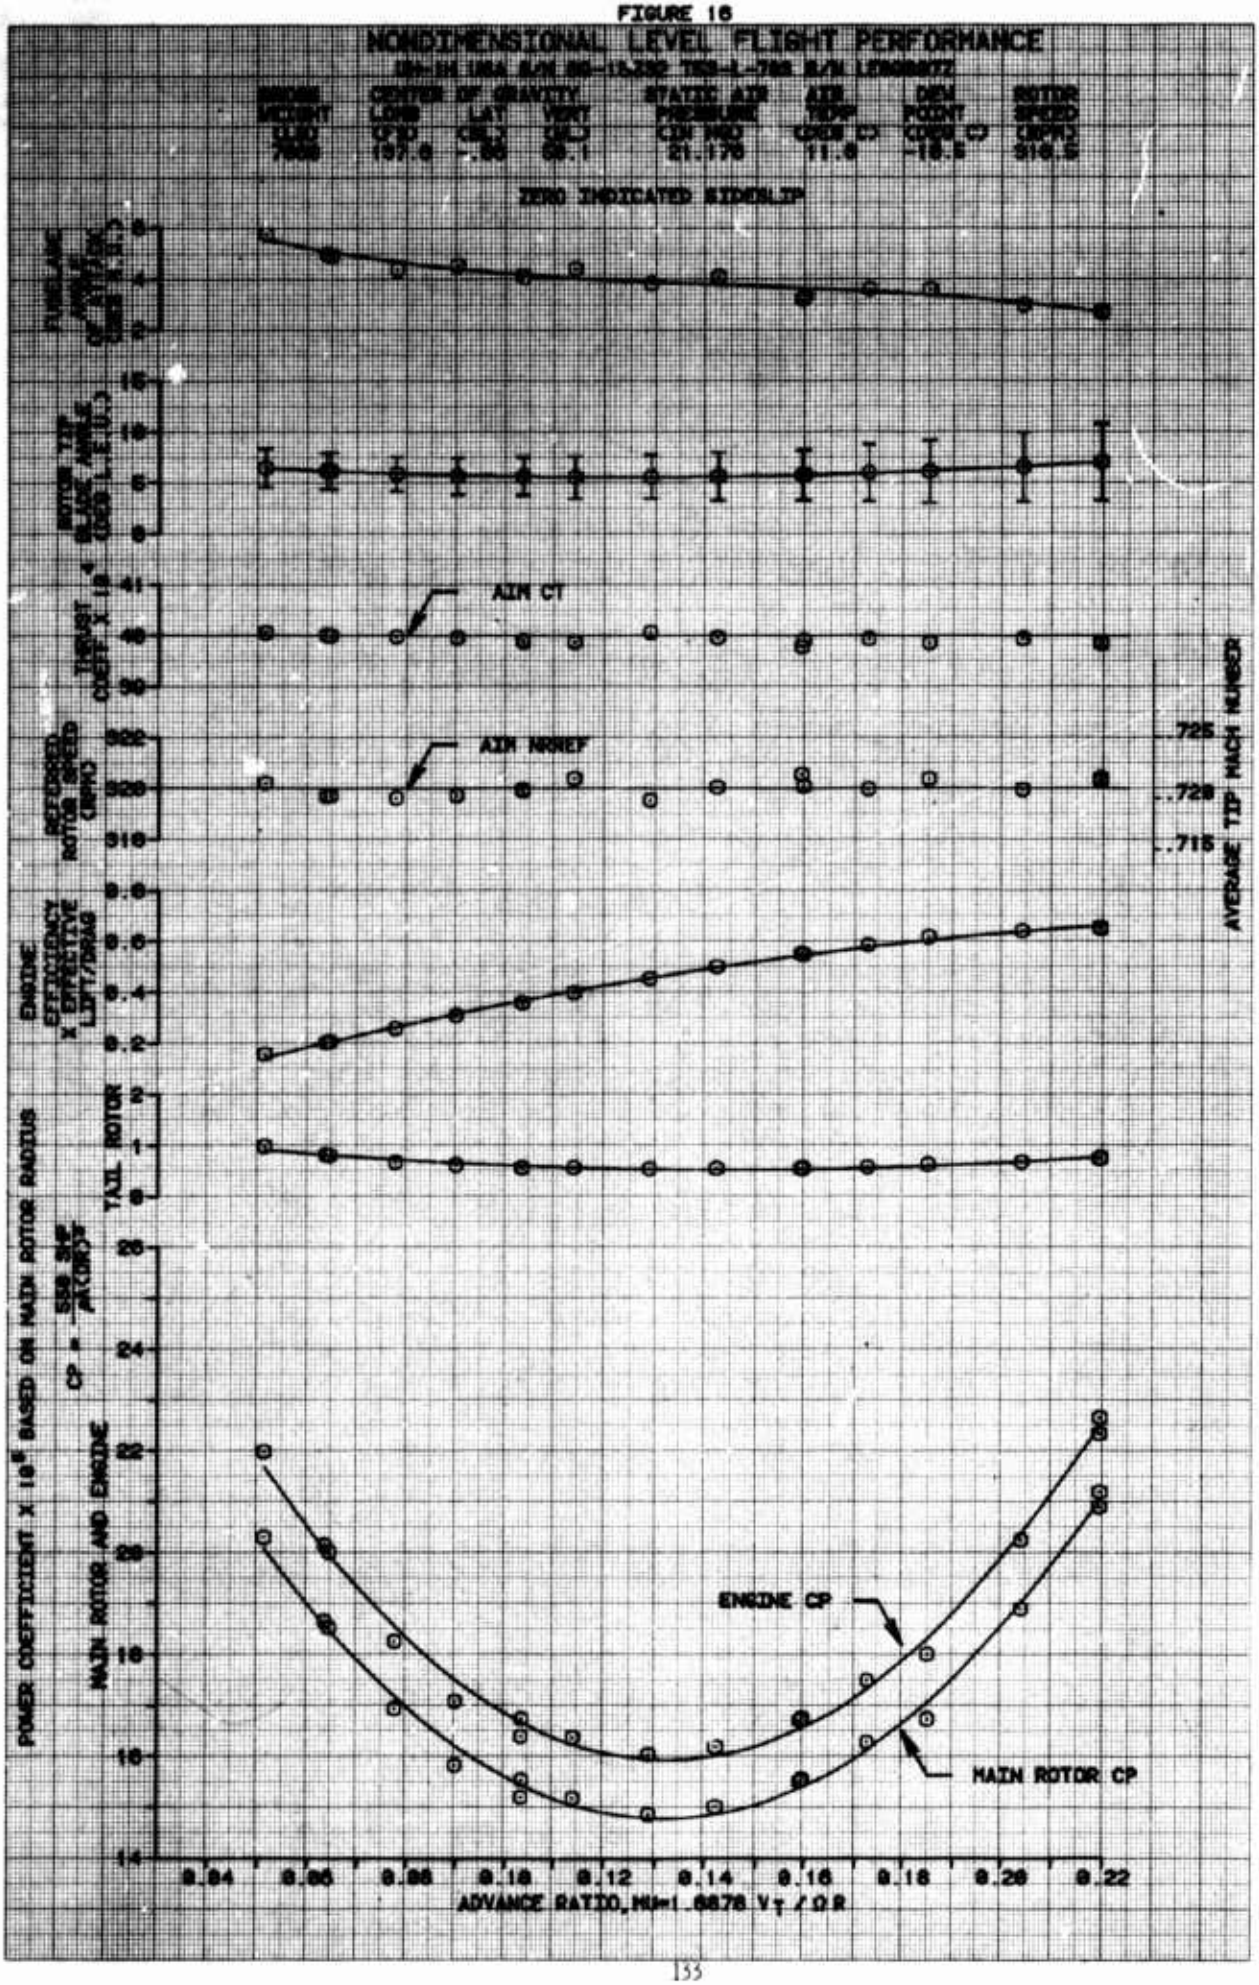

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN NRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
.725
.720
.715
ADVANCE RATIO, MU=1.6878 V∞ / ΩR
0.04
0.06
0.08
0.10
0.12
0.14
0.16
0.18
0.20
0.22

FIGURE 17

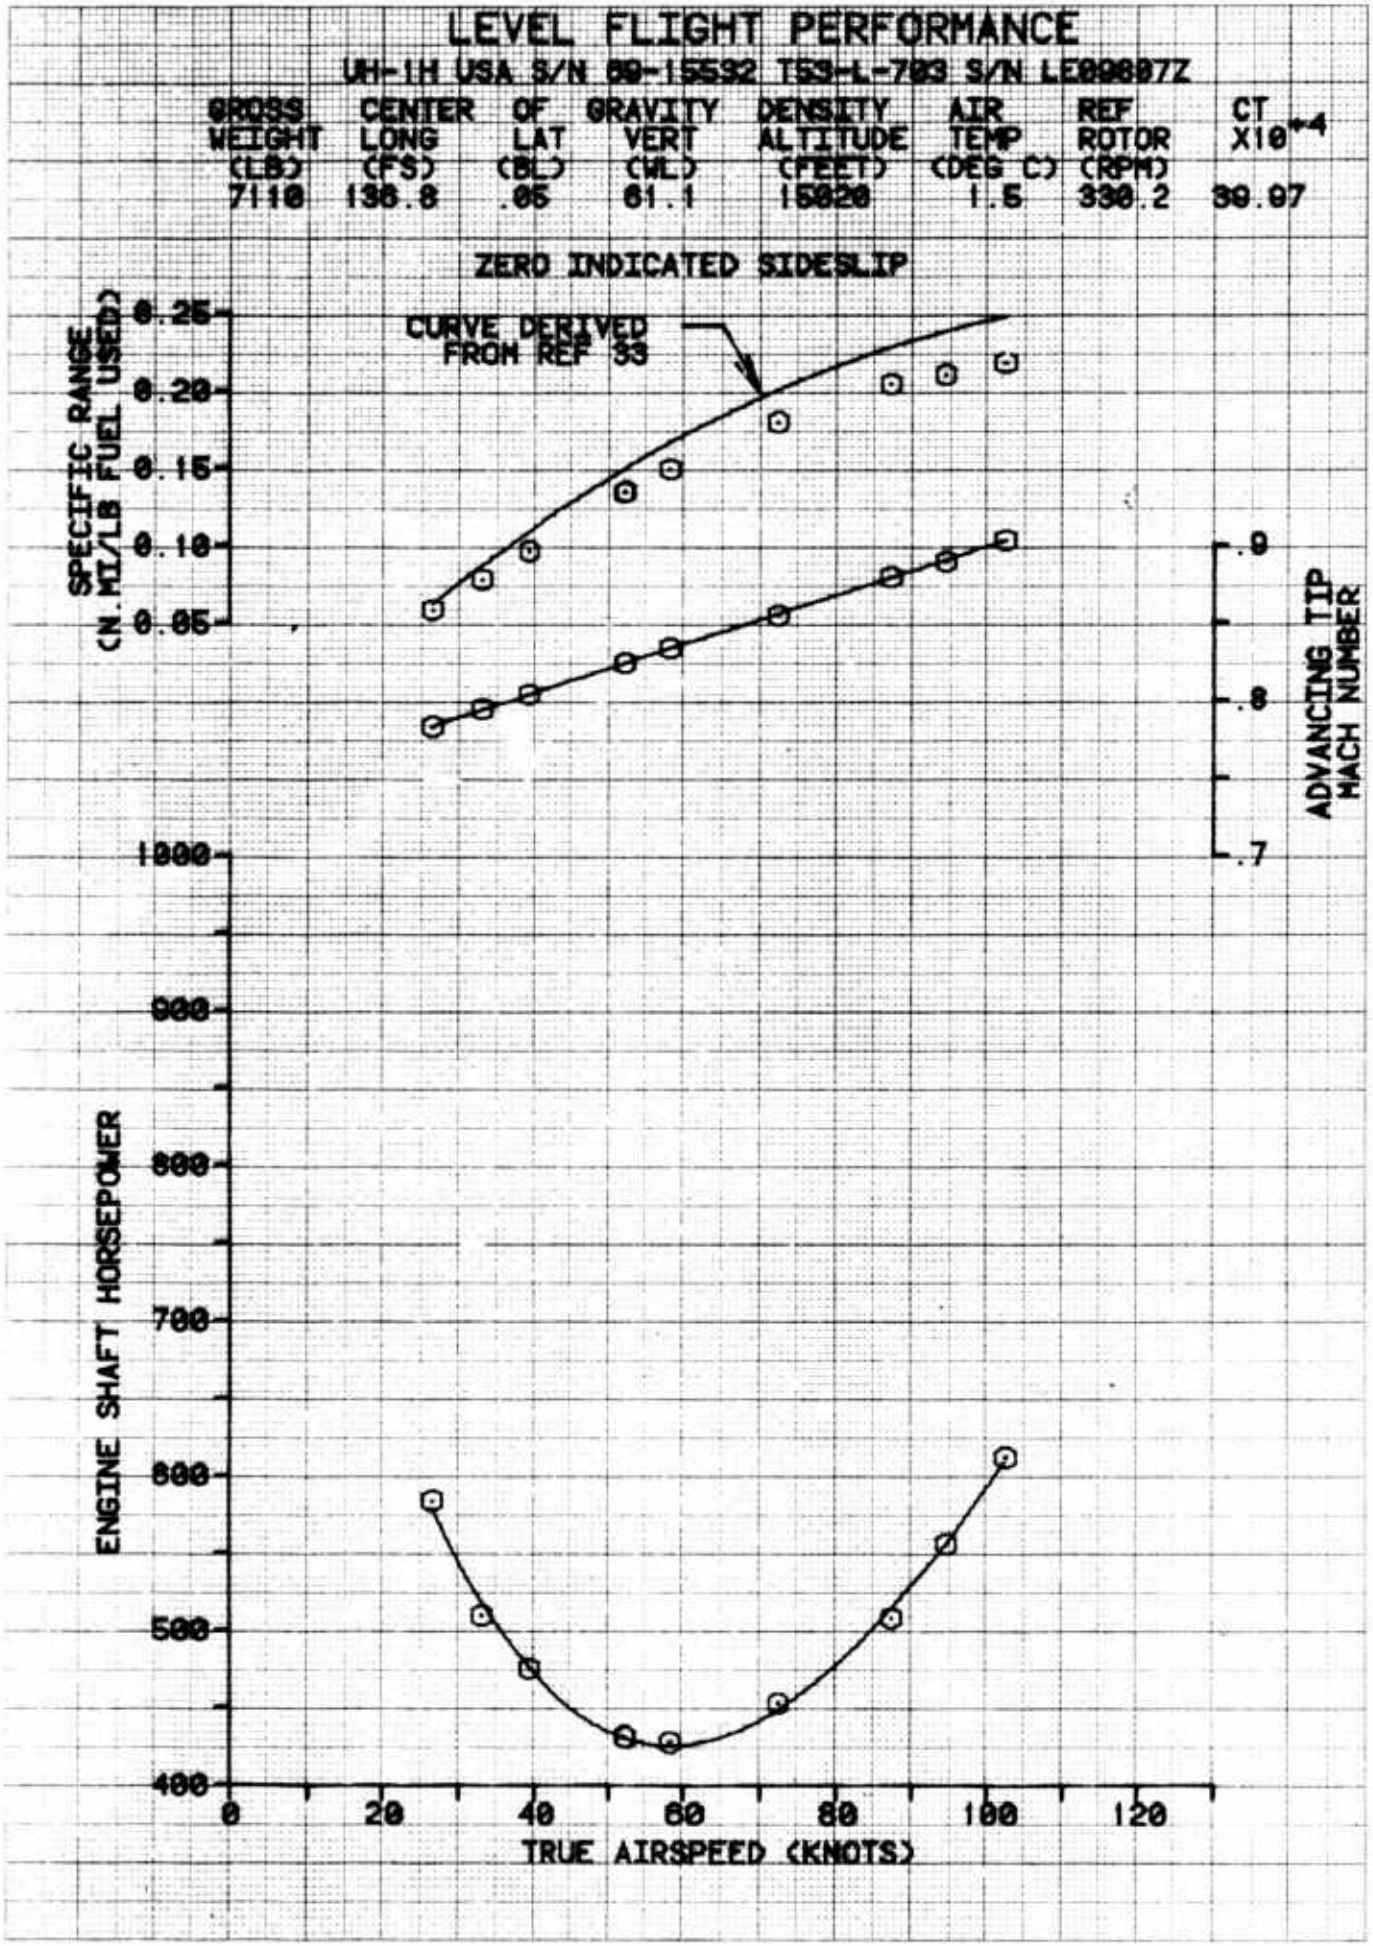

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15532 T53-L-703 S/N LE09607Z
GROSS WEIGHT (LB) 7110
CENTER OF GRAVITY LONG (FS) 136.8
LAT (BL) .05
VERT (WL) 61.1
DENSITY ALTITUDE (FEET) 15020
AIR TEMP (DEG C) 1.5
REF ROTOR (RPM) 330.2
CT X10**-4 39.97
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 18

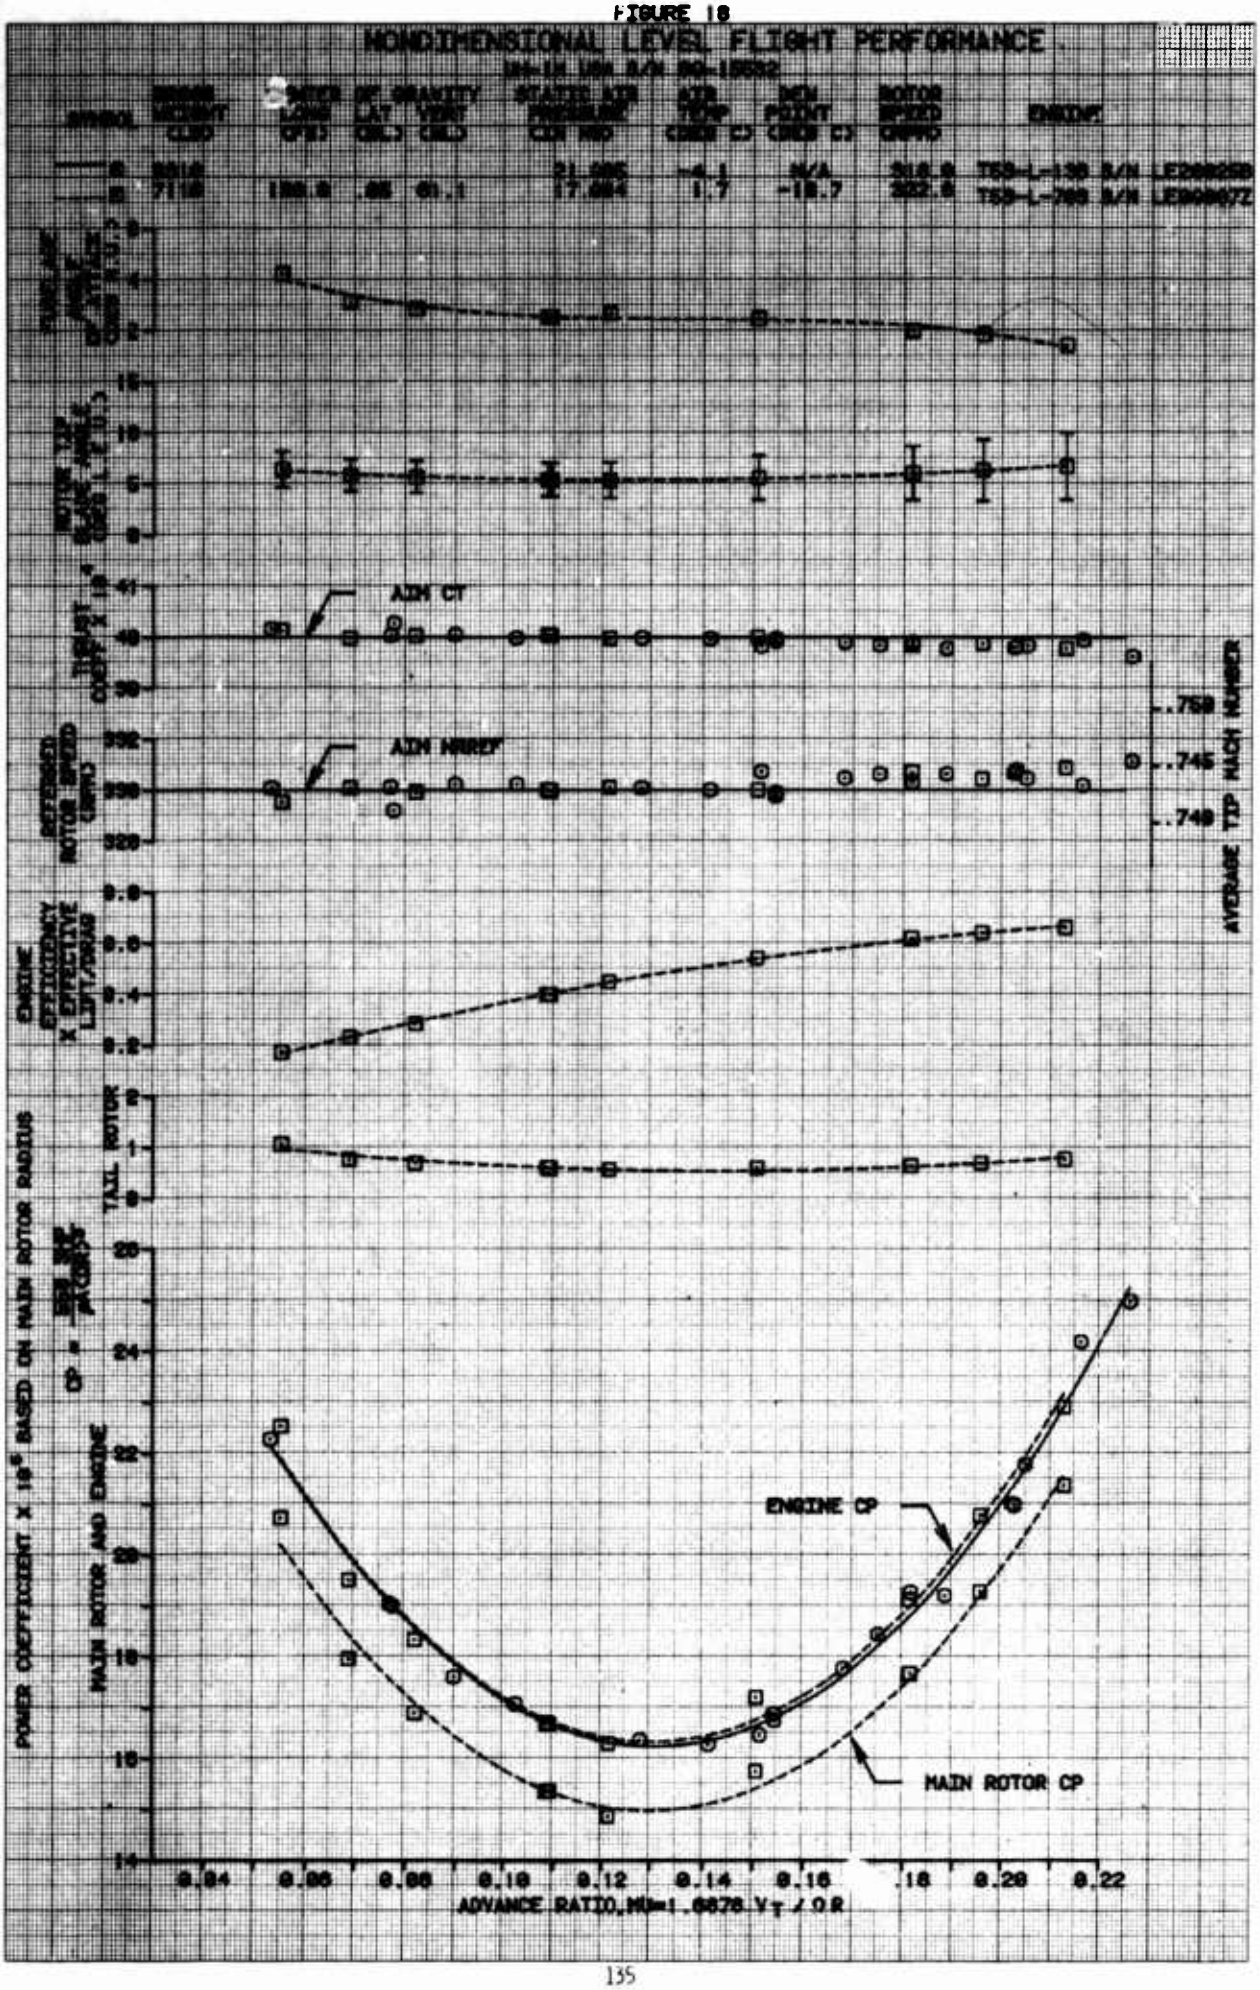

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
AIDM CT
AIDM MRRPM
ENGINE CP
MAIN ROTOR CP
ADVANCE RATIO, MH=1.6878 VT / ΩR
AVERAGE TIP MACH NUMBER
TAIL ROTOR
MAIN ROTOR AND ENGINE

FIGURE 19

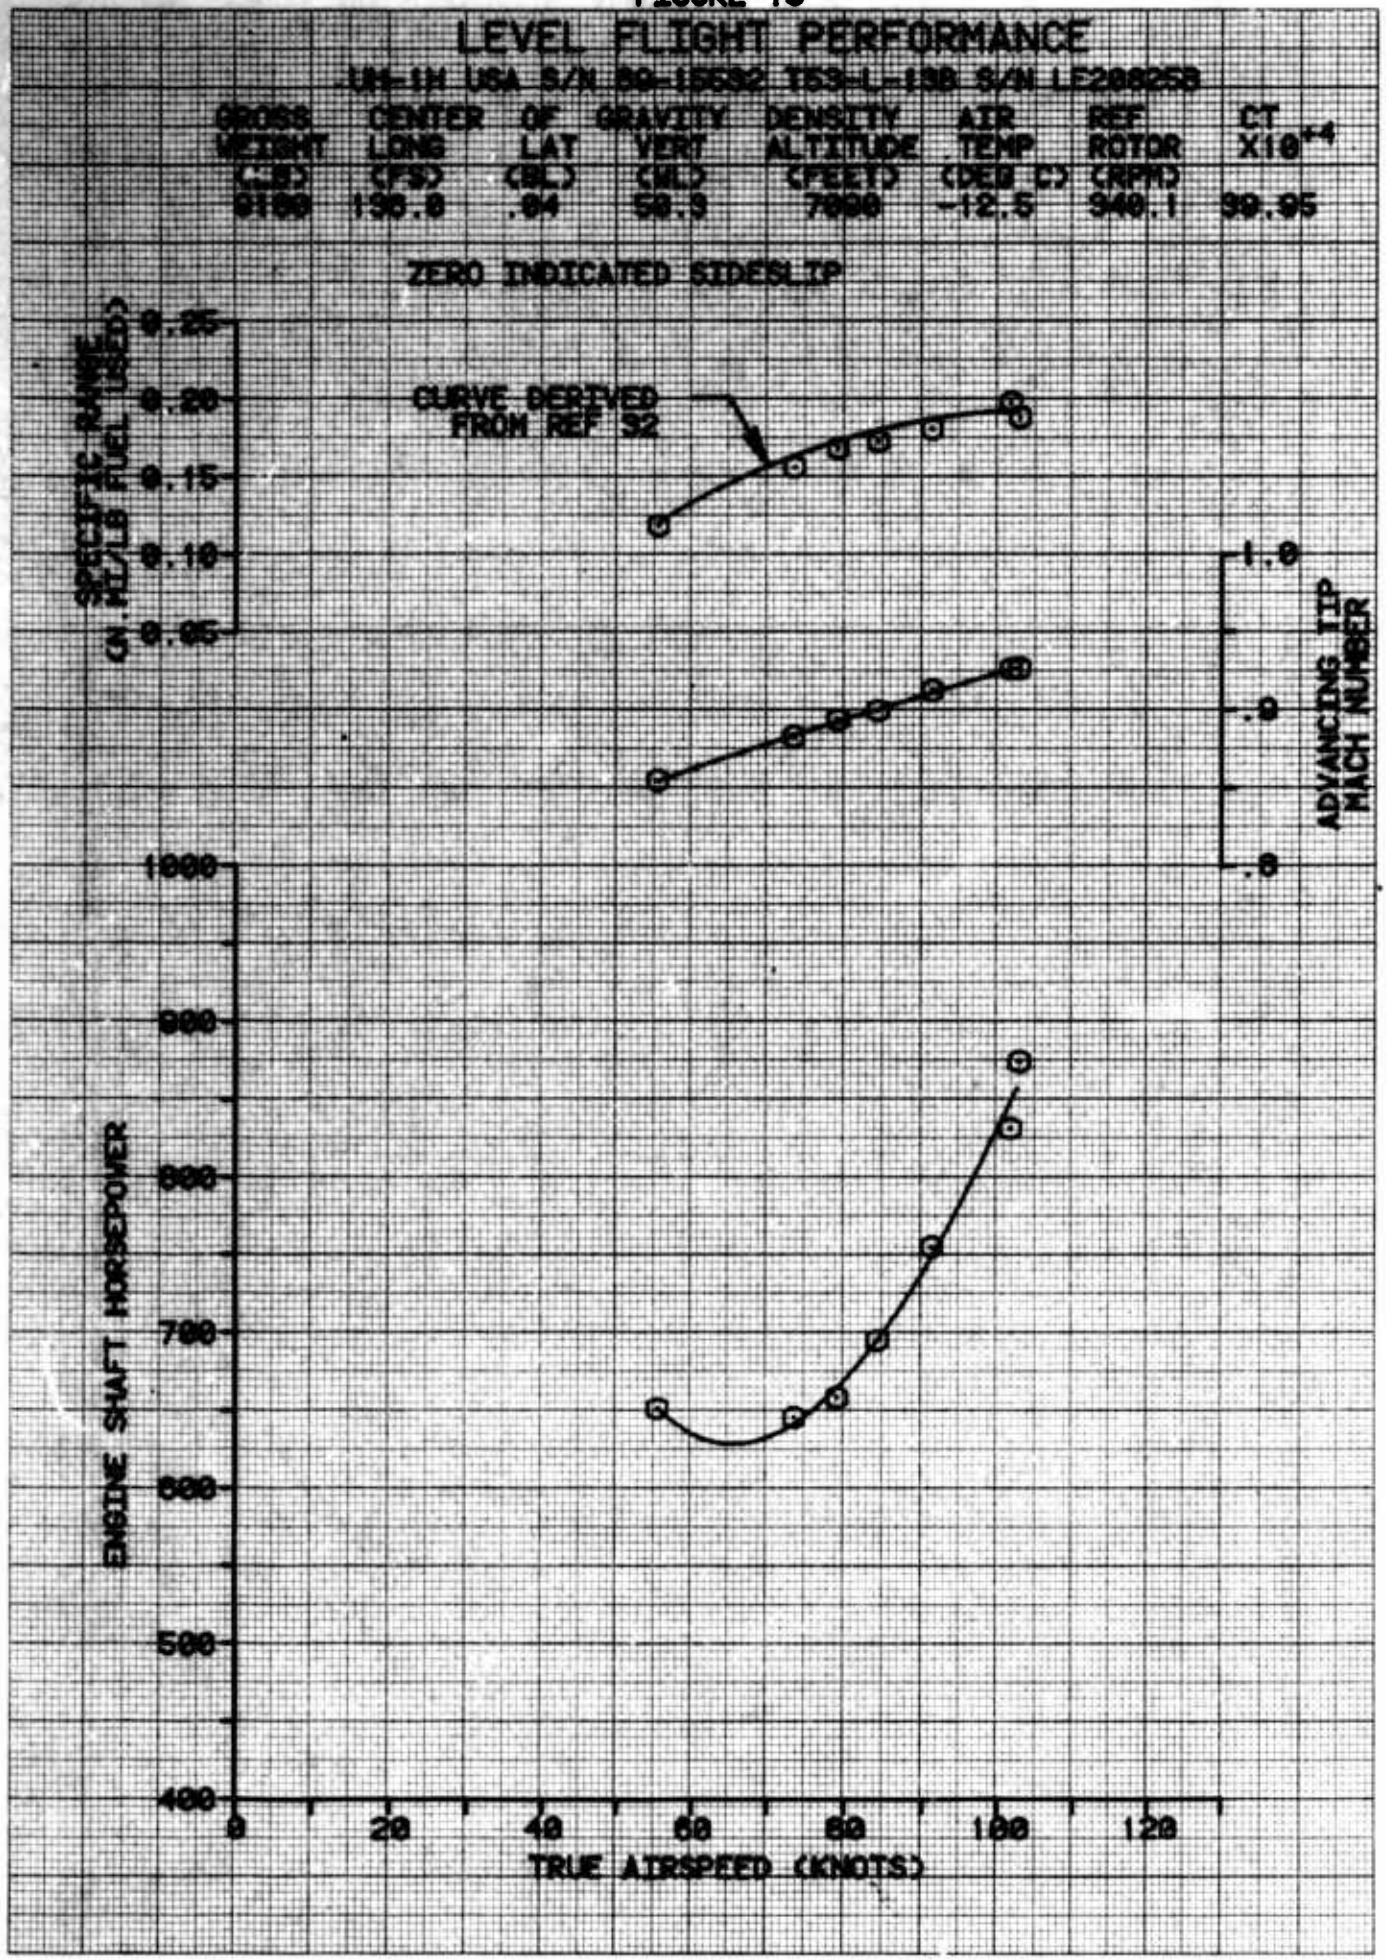

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15692 T53-L-13B S/N LE20825B
GROSS WEIGHT (LB) 8100
CENTER OF GRAVITY LONG (FS) 136.8
LAT (BL) .04
VERT (WL) 58.9
DENSITY ALTITUDE (FEET) 7000
AIR TEMP (DEG C) -12.5
REF ROTOR (RPM) 340.1
CT X10+4 99.95
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 32
SPECIFIC RANGE (N MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
1.0
.9
.8
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 20

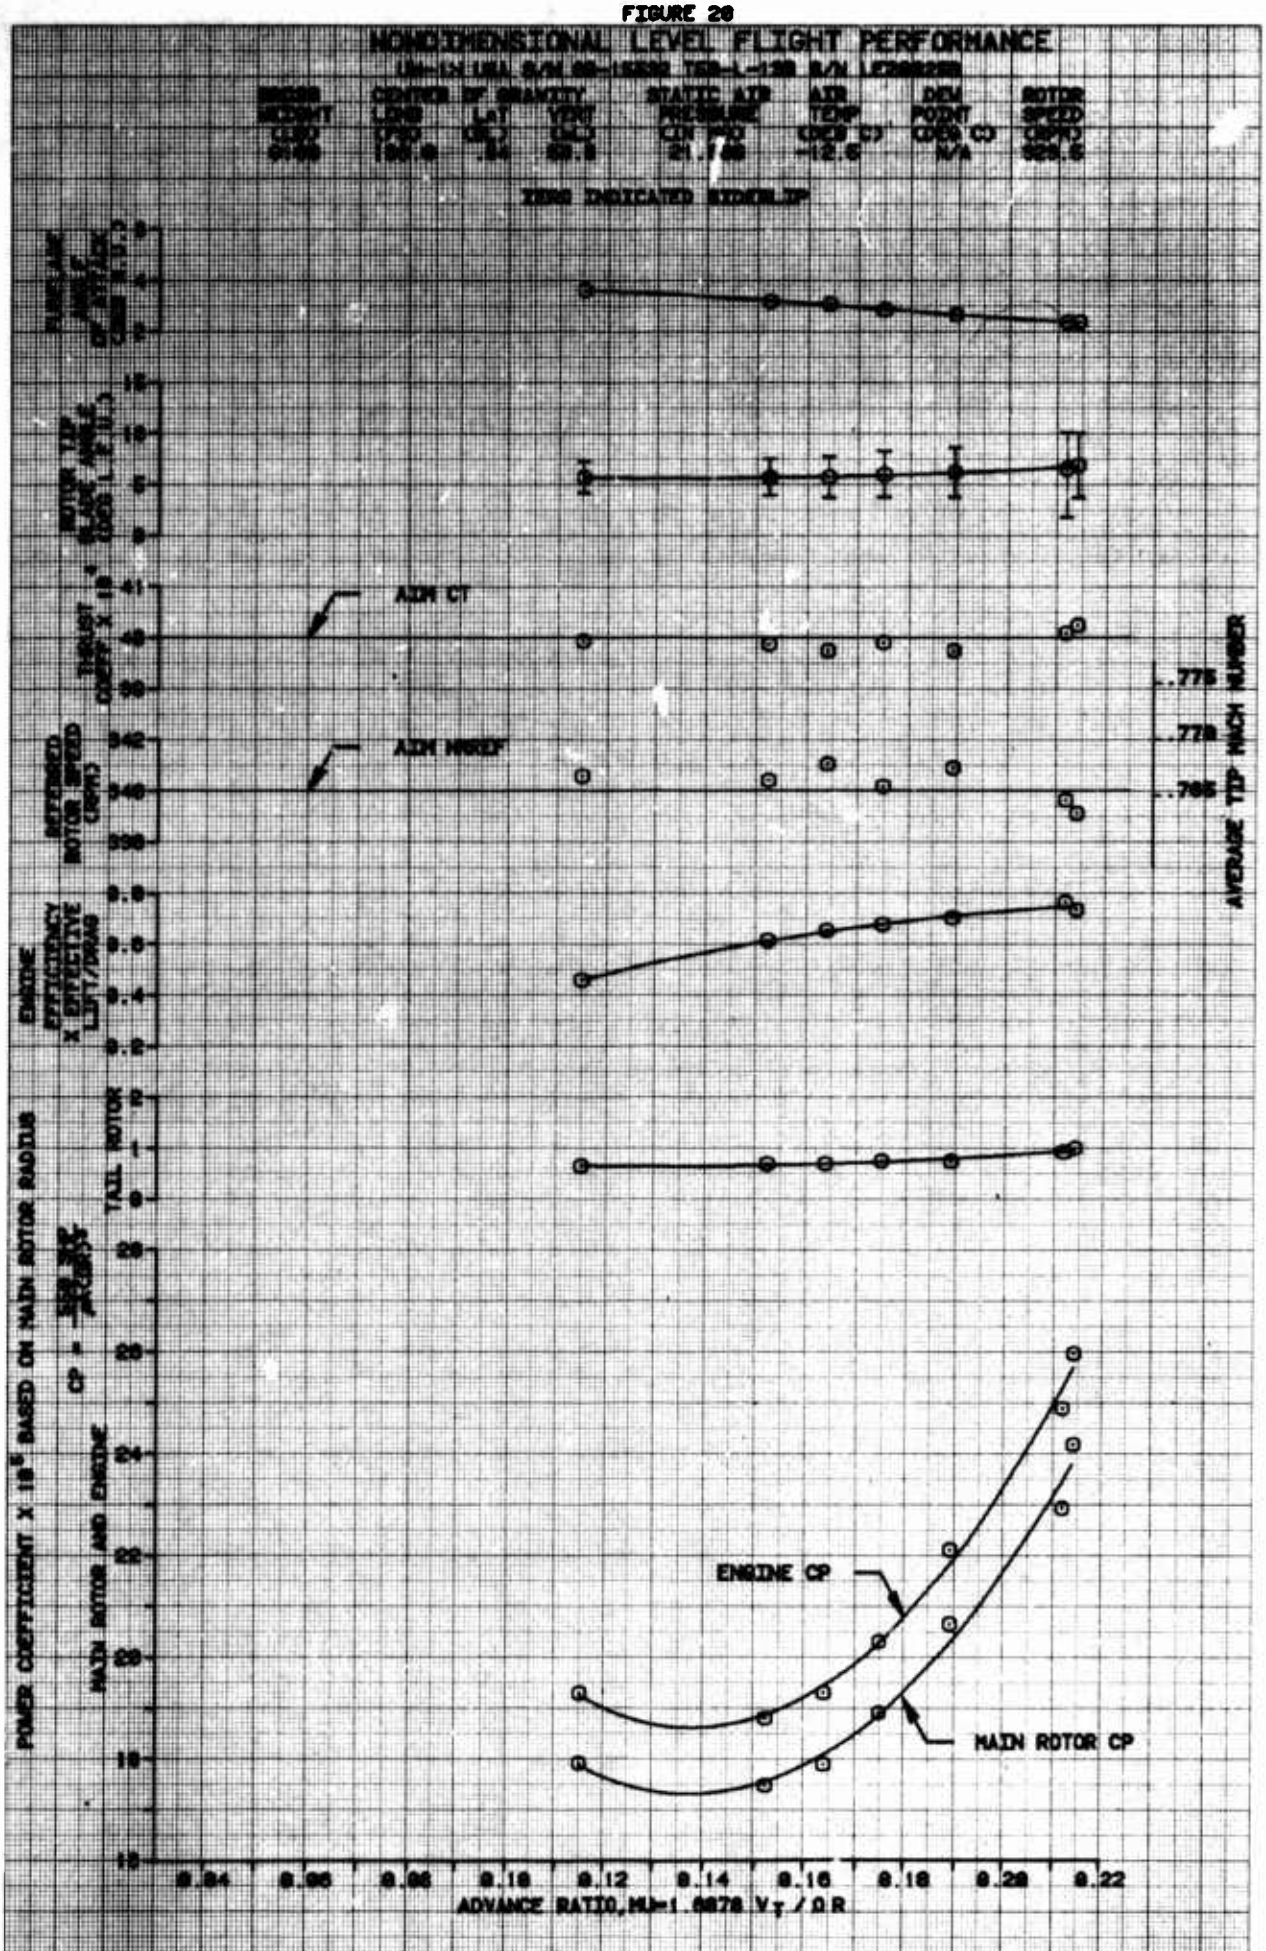

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIDN CT
AIDN MRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
.775
.770
.765
ADVANCE RATIO, MU=1.6878 Vt / ΩR
0.04
0.06
0.08
0.10
0.12
0.14
0.16
0.18
0.20
0.22

FIGURE 21

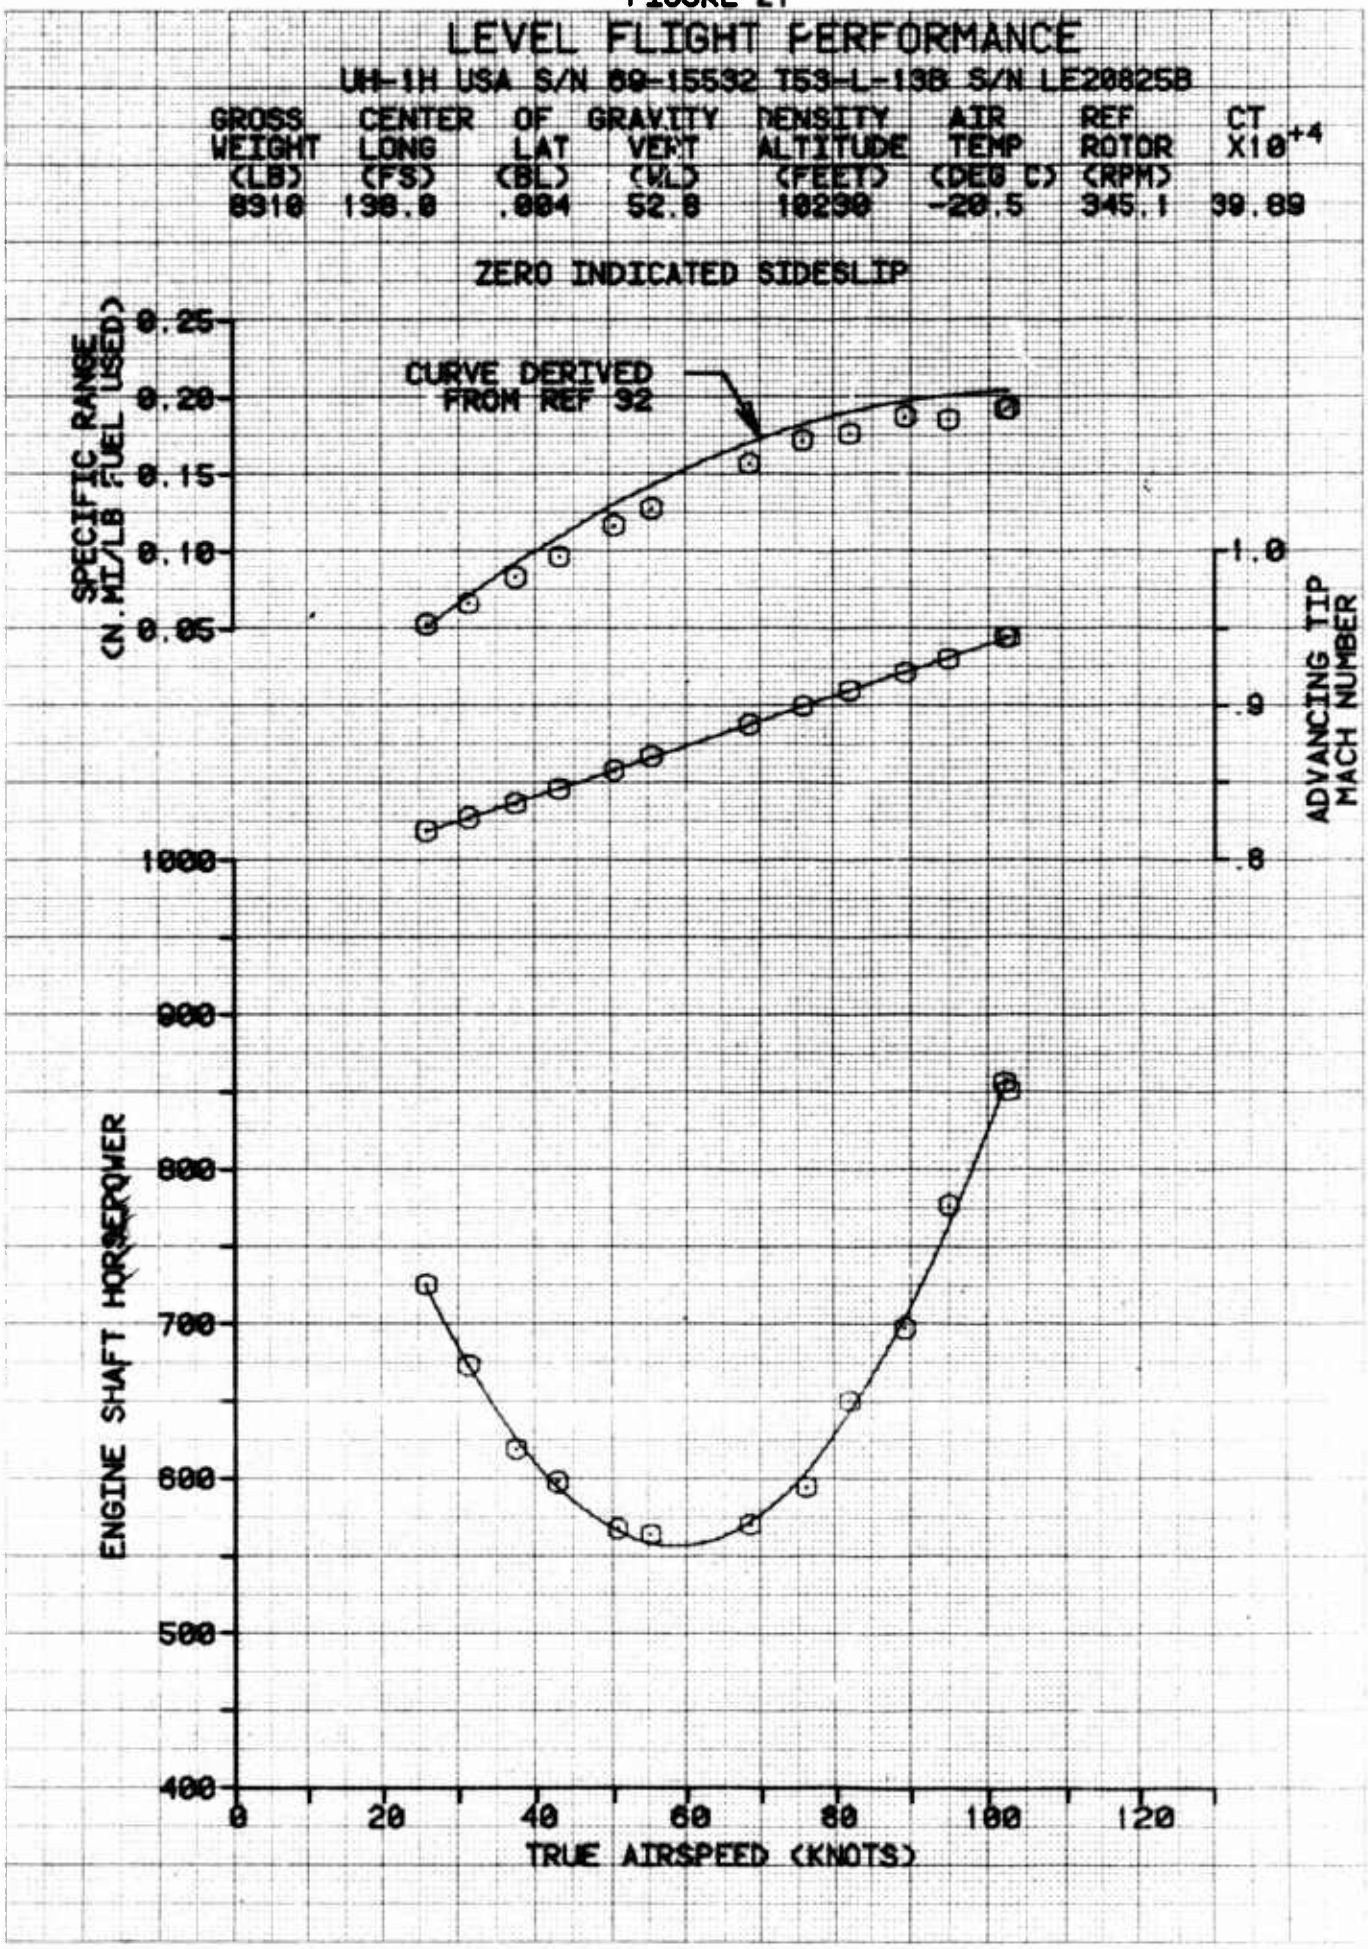

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15532 T53-L-13B S/N LE20825B
GROSS WEIGHT (LB) 8910
CENTER OF GRAVITY LONG (FS) 138.8
LAT (BL) .004
VERT (WL) 52.8
DENSITY ALTITUDE (FEET) 10290
AIR TEMP (DEG C) -20.5
REF ROTOR (RPM) 345.1
CT X10+4 39.89
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 32
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
1.0
.9
.8
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 22

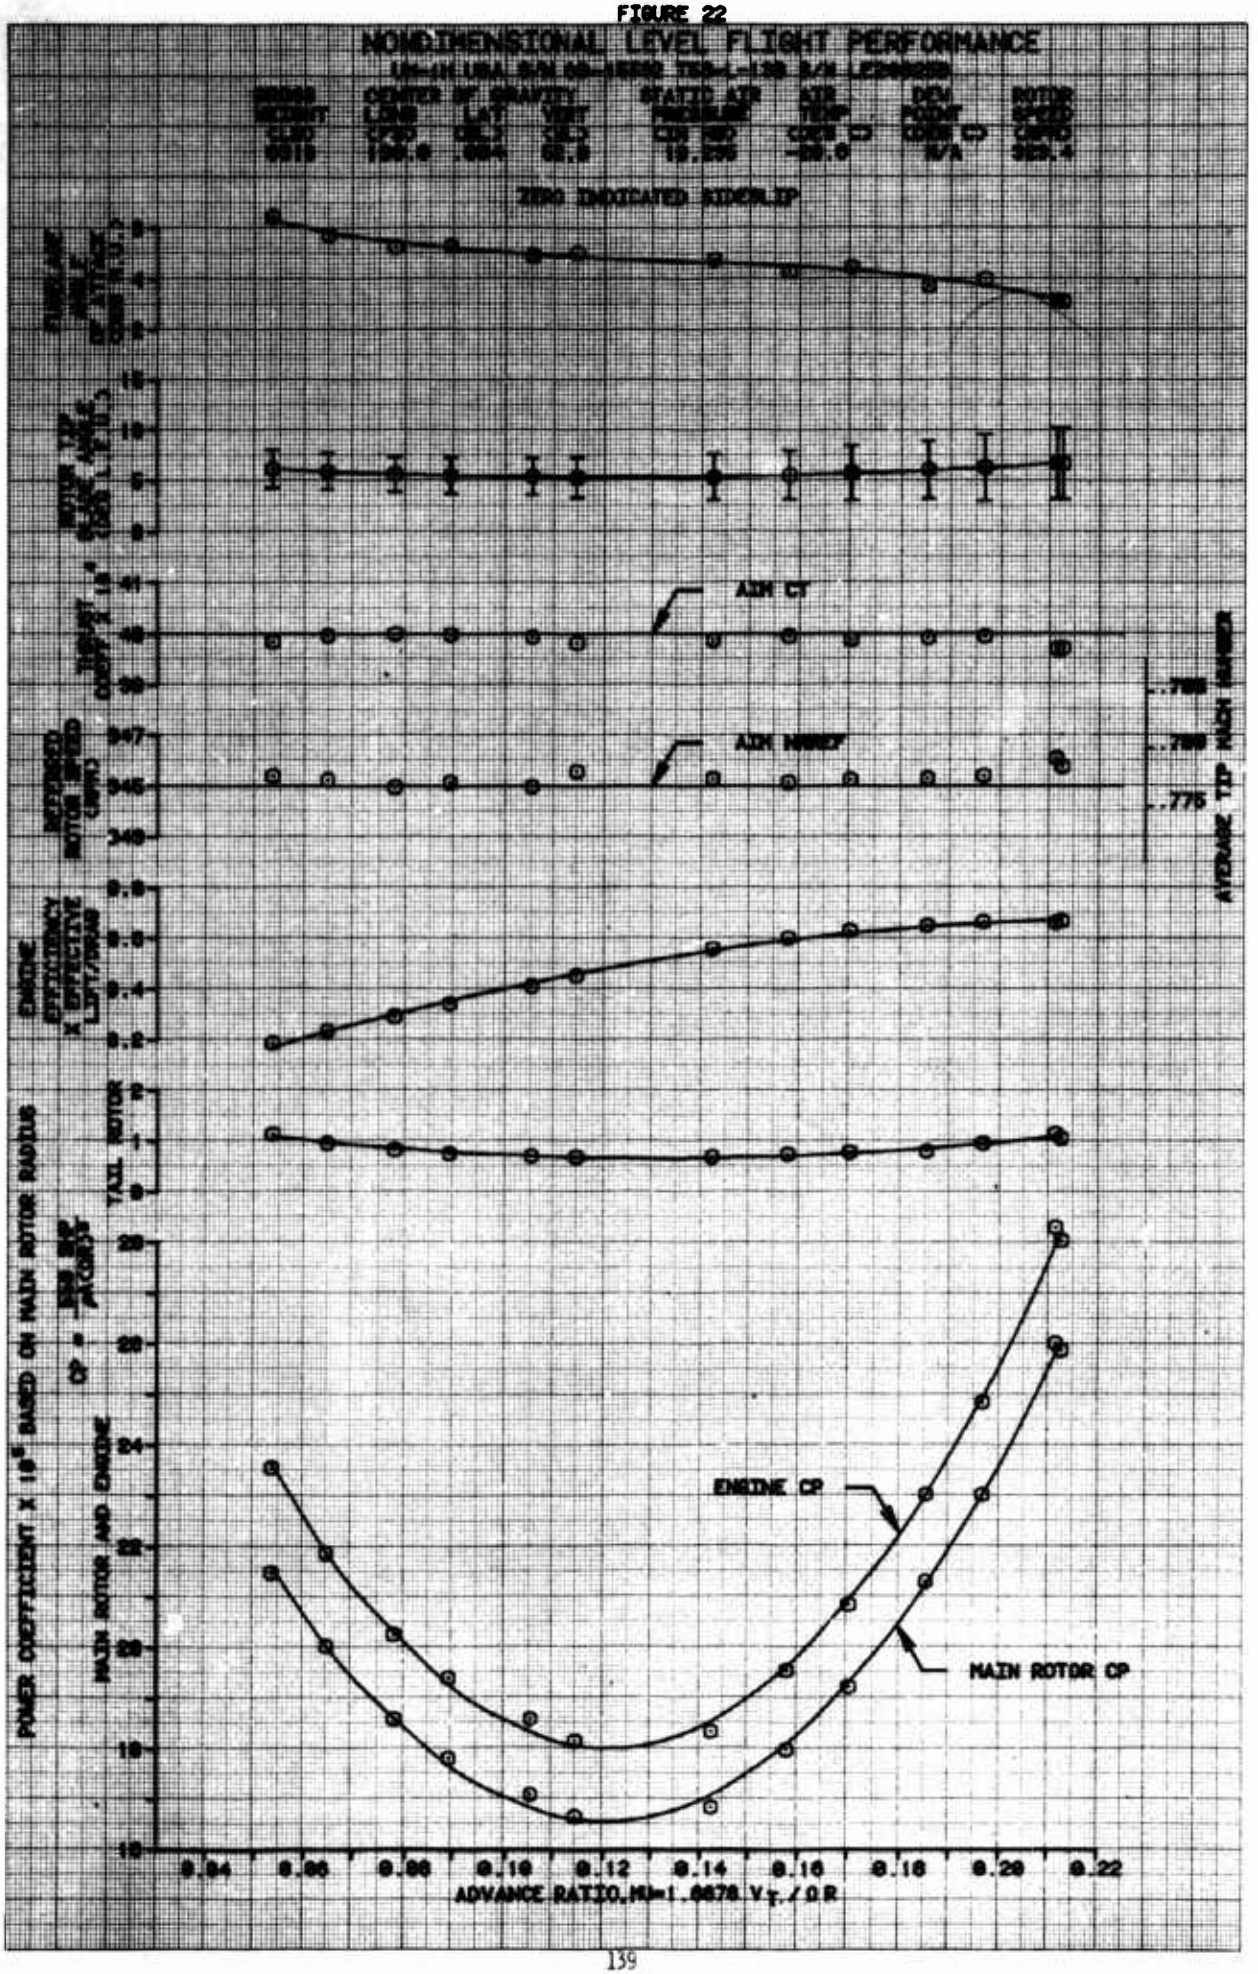

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AXIS CT
AXIS MMREF
AVERAGE TIP MACH NUMBER
.785
.780
.775
ENGINE EFFICIENCY X EFFECTIVE LIFT/DRAG
TAIL ROTOR
POWER COEFFICIENT X 10⁵ BASED ON MAIN ROTOR RADIUS
MAIN ROTOR AND ENGINE
ENGINE CP
MAIN ROTOR CP
ADVANCE RATIO, MU=1.6878 V∞ / Ω R

FIGURE 23

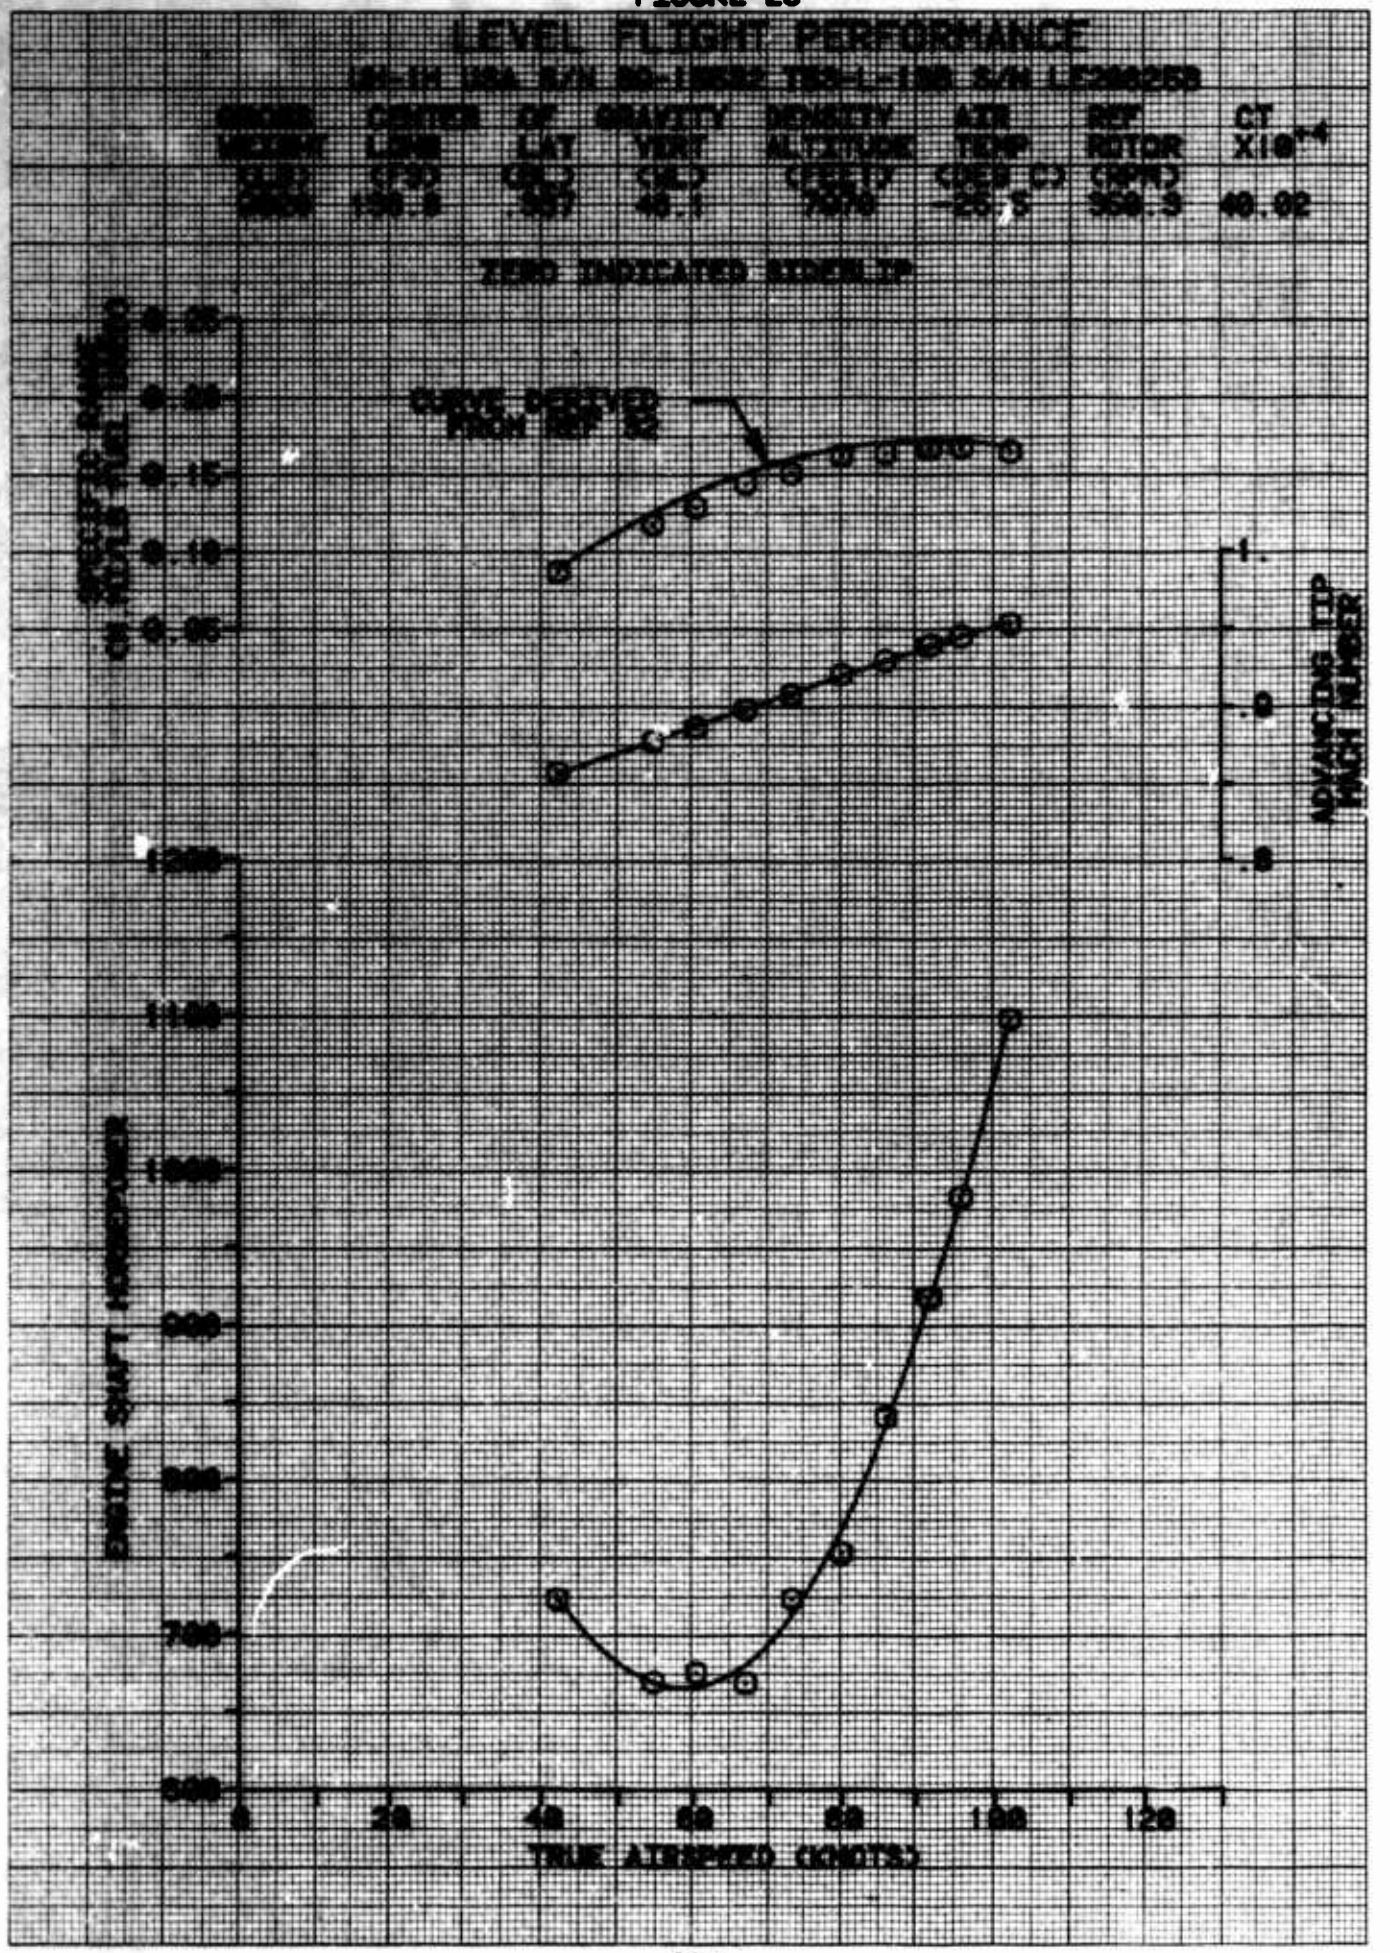

LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
ADVANCING TIP MACH NUMBER
TRUE AIRSPEED (KNOTS)

FIGURE 24

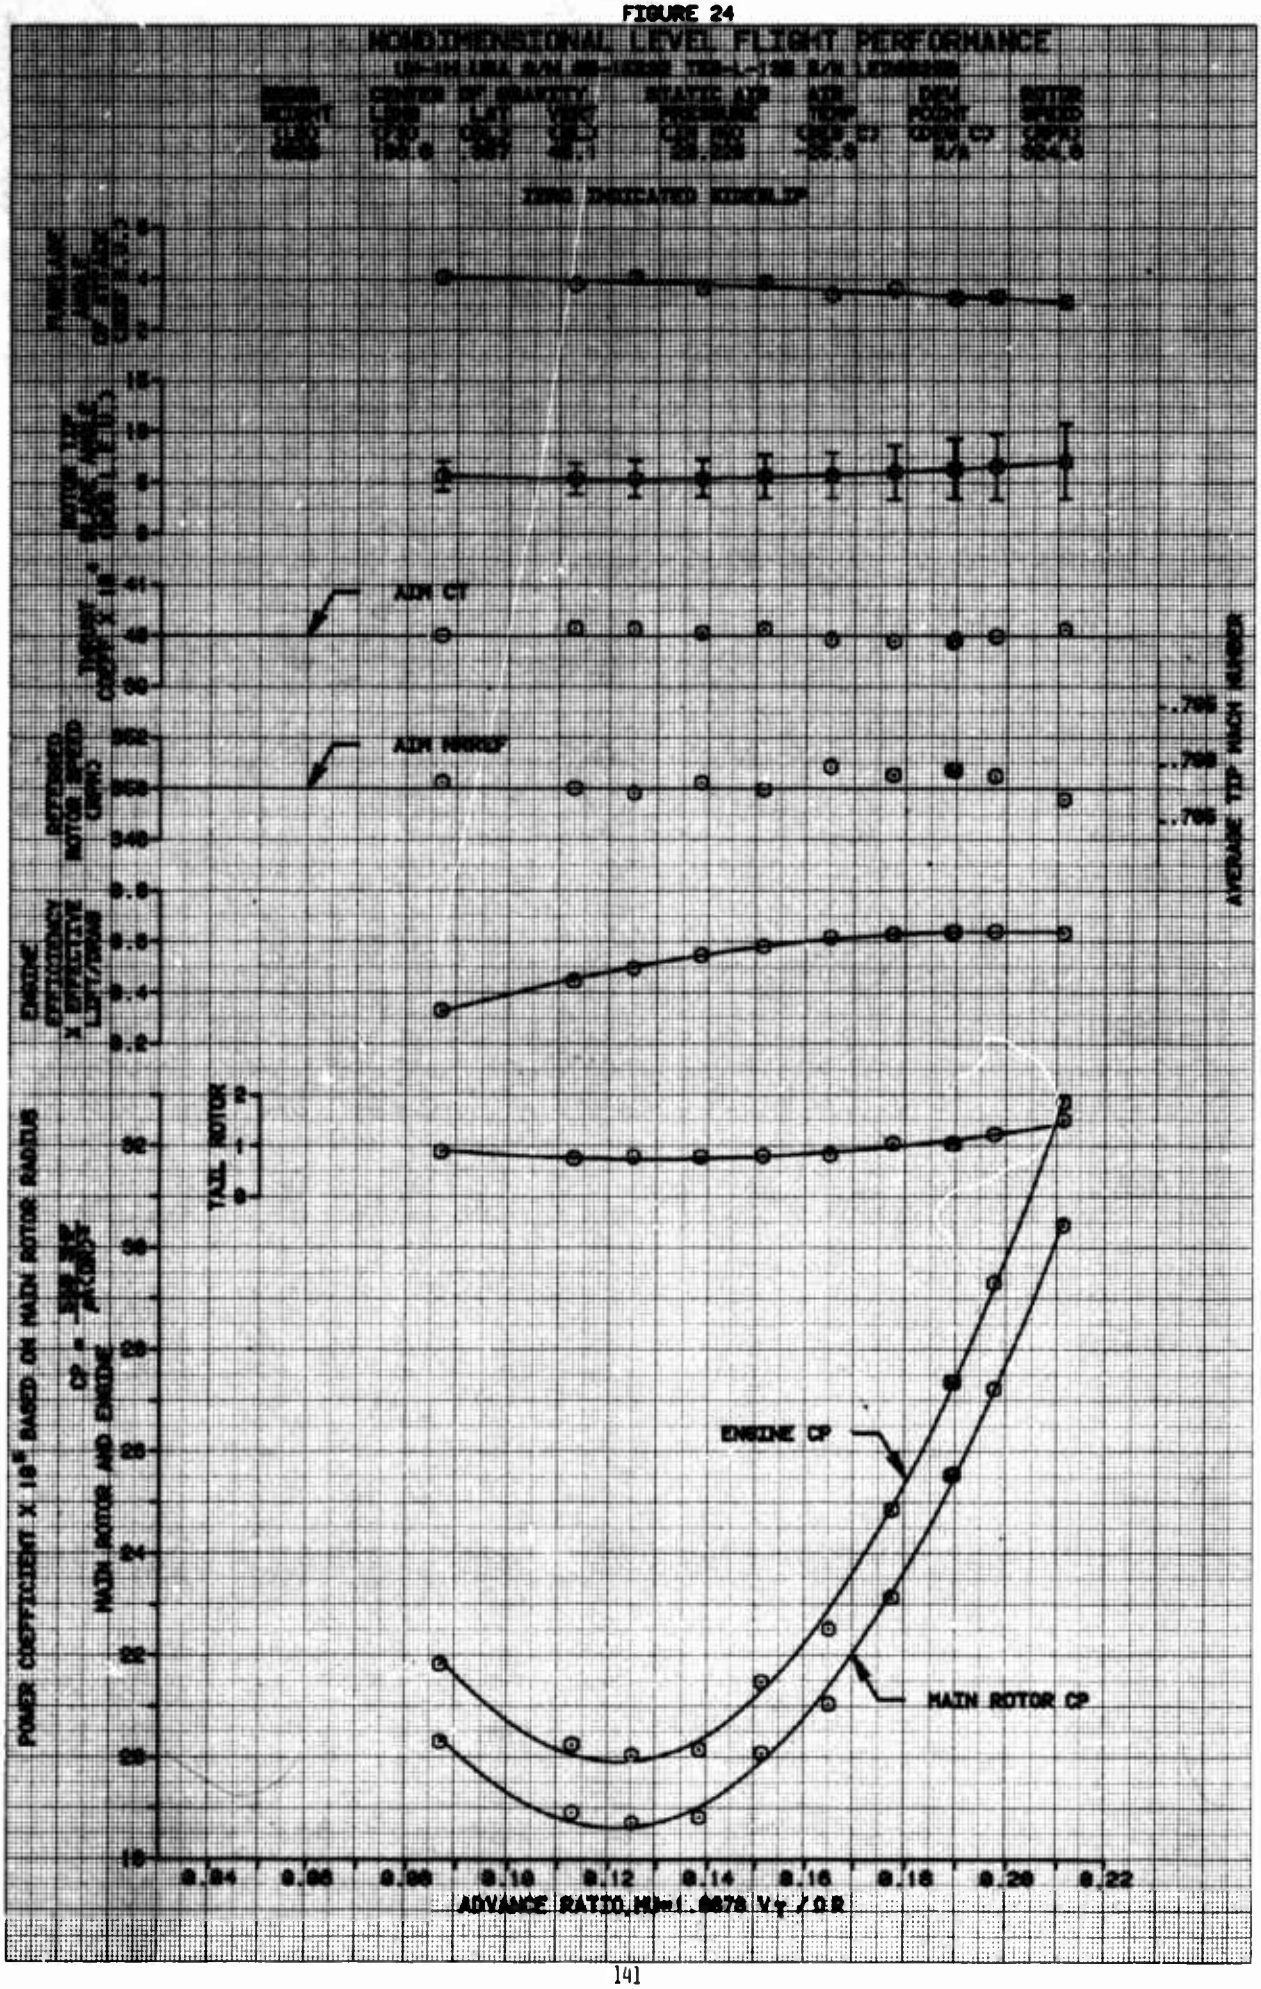

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN MMREF
ENGINE CP
MAIN ROTOR CP
POWER COEFFICIENT X 10⁵ BASED ON MAIN ROTOR RADIUS
ADVANCE RATIO, MU=1.6878 VT / ΩR

FIGURE 25

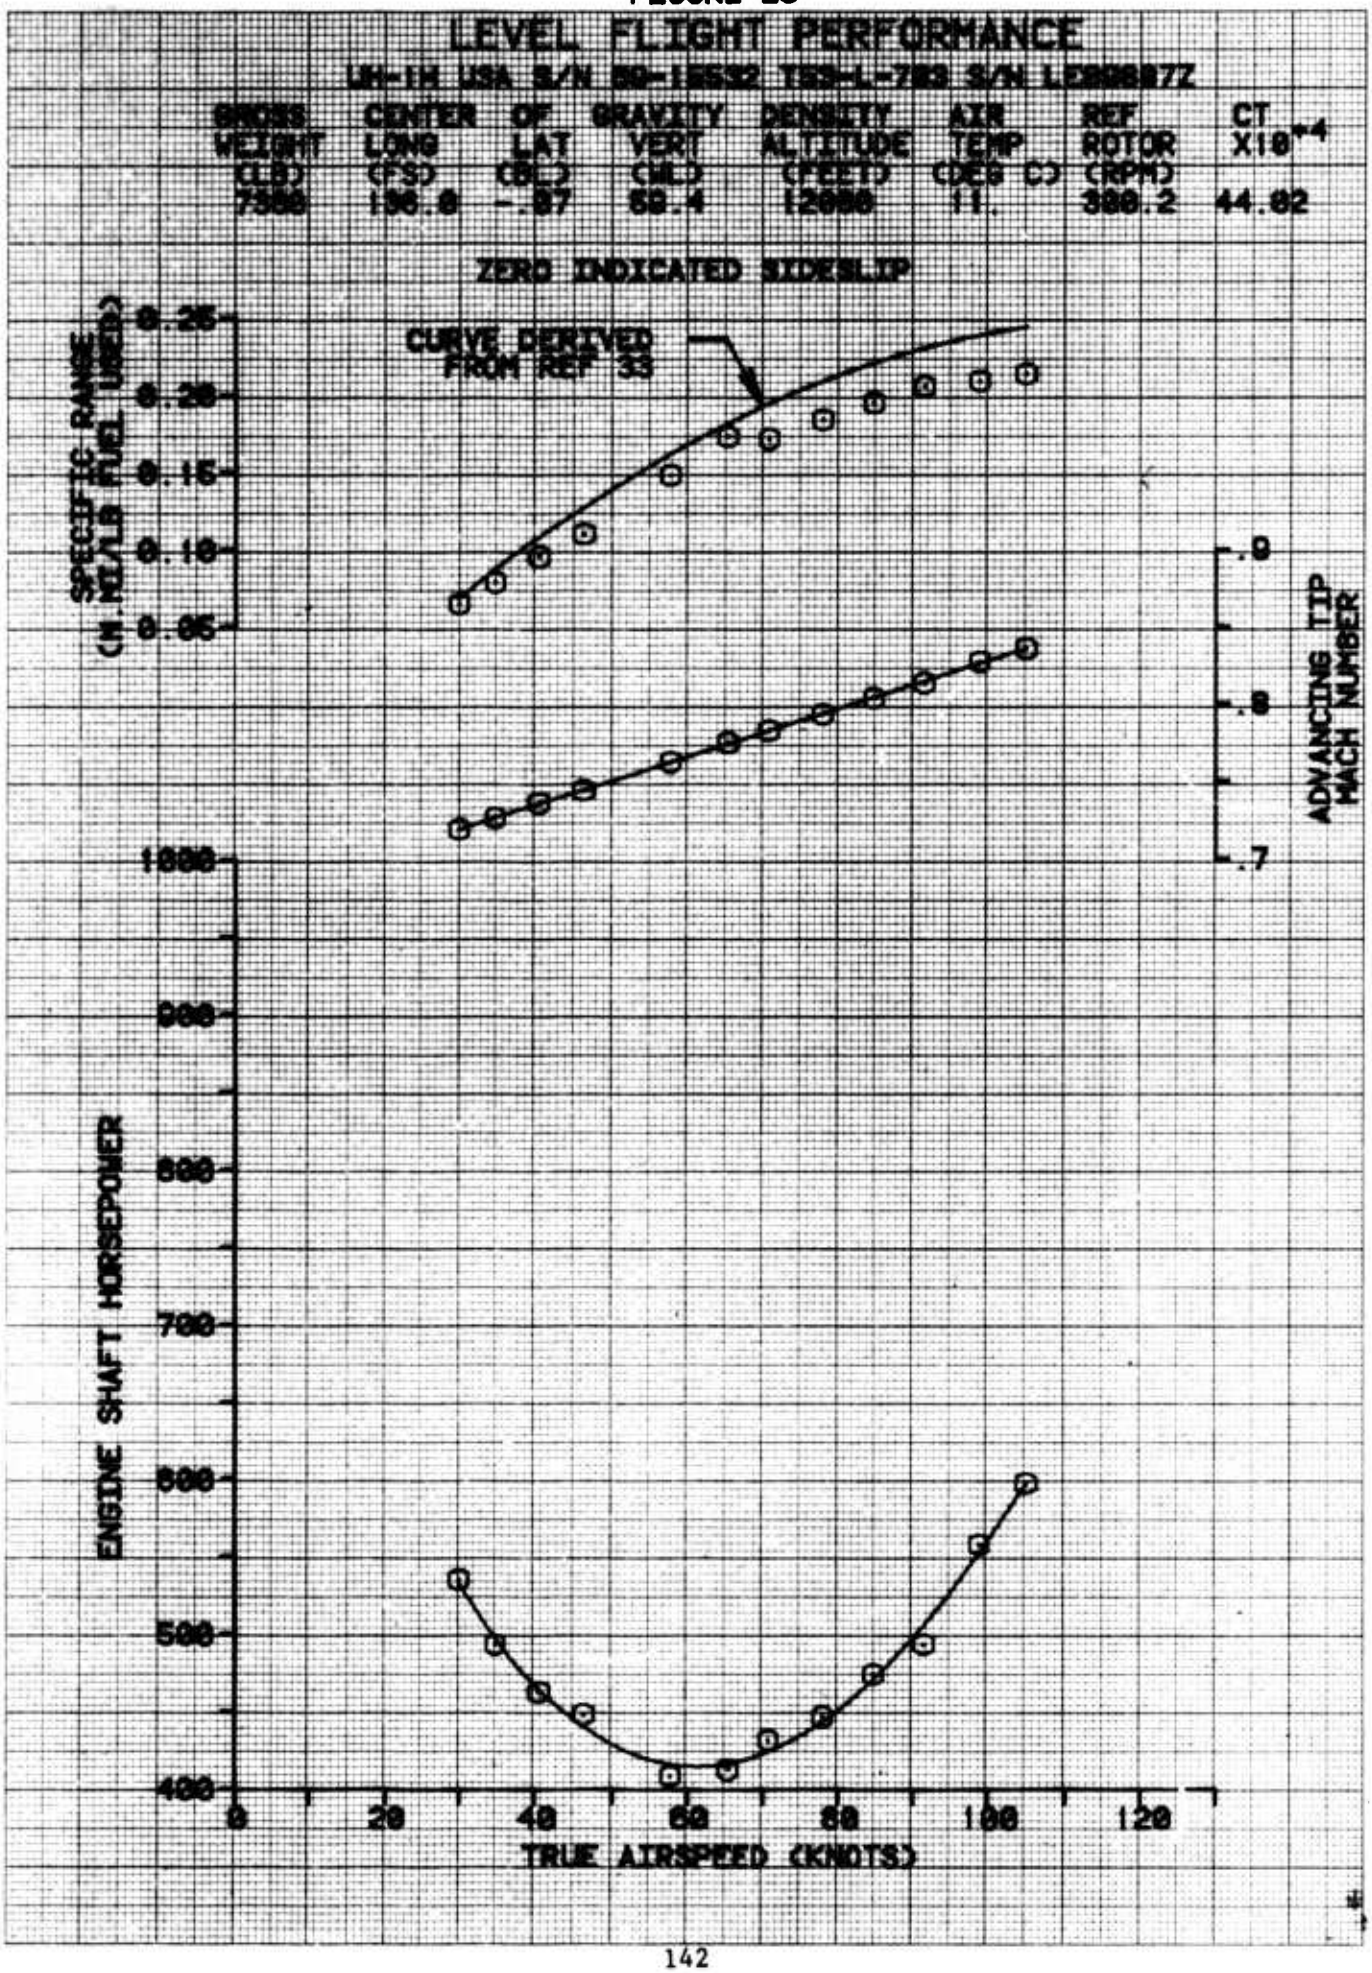

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 66-16552 TSS-L-783 S/N LE66827Z
GROSS WEIGHT (LB) 7350
CENTER OF GRAVITY LONG (FS) 136.8
LAT (BL) -.87
VERT (BL) 68.4
DENSITY ALTITUDE (FEET) 12000
AIR TEMP (DEG C) 11.
REF ROTOR (RPM) 388.2
CT X10**-4 44.82
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC RANGE (N MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 28

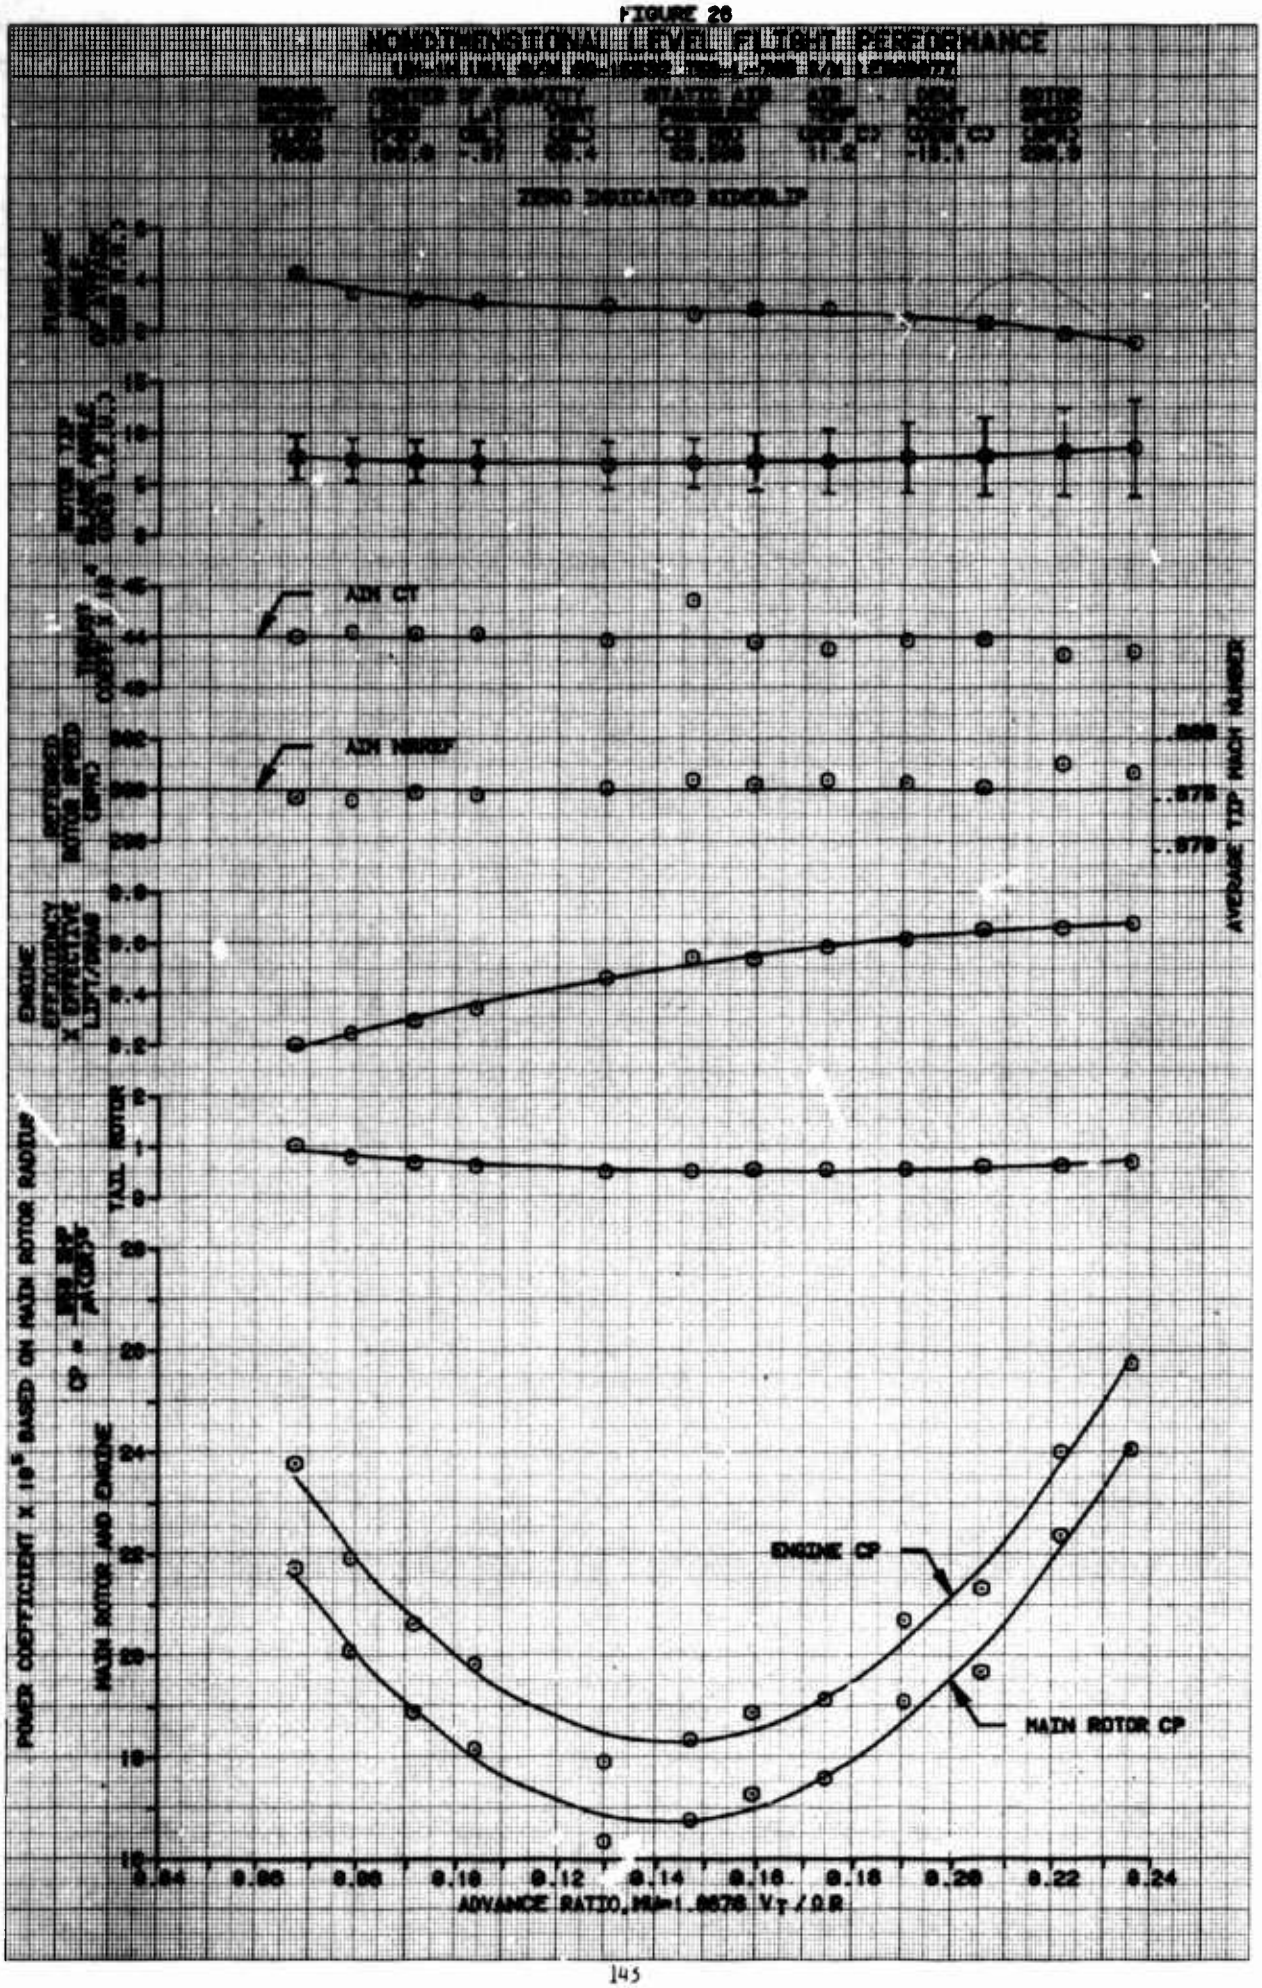

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AUX CT
AUX MMREF
ENGINE CP
MAIN ROTOR CP
ADVANCE RATIO, μ=1.8678 V_T / Ω R

FIGURE 27

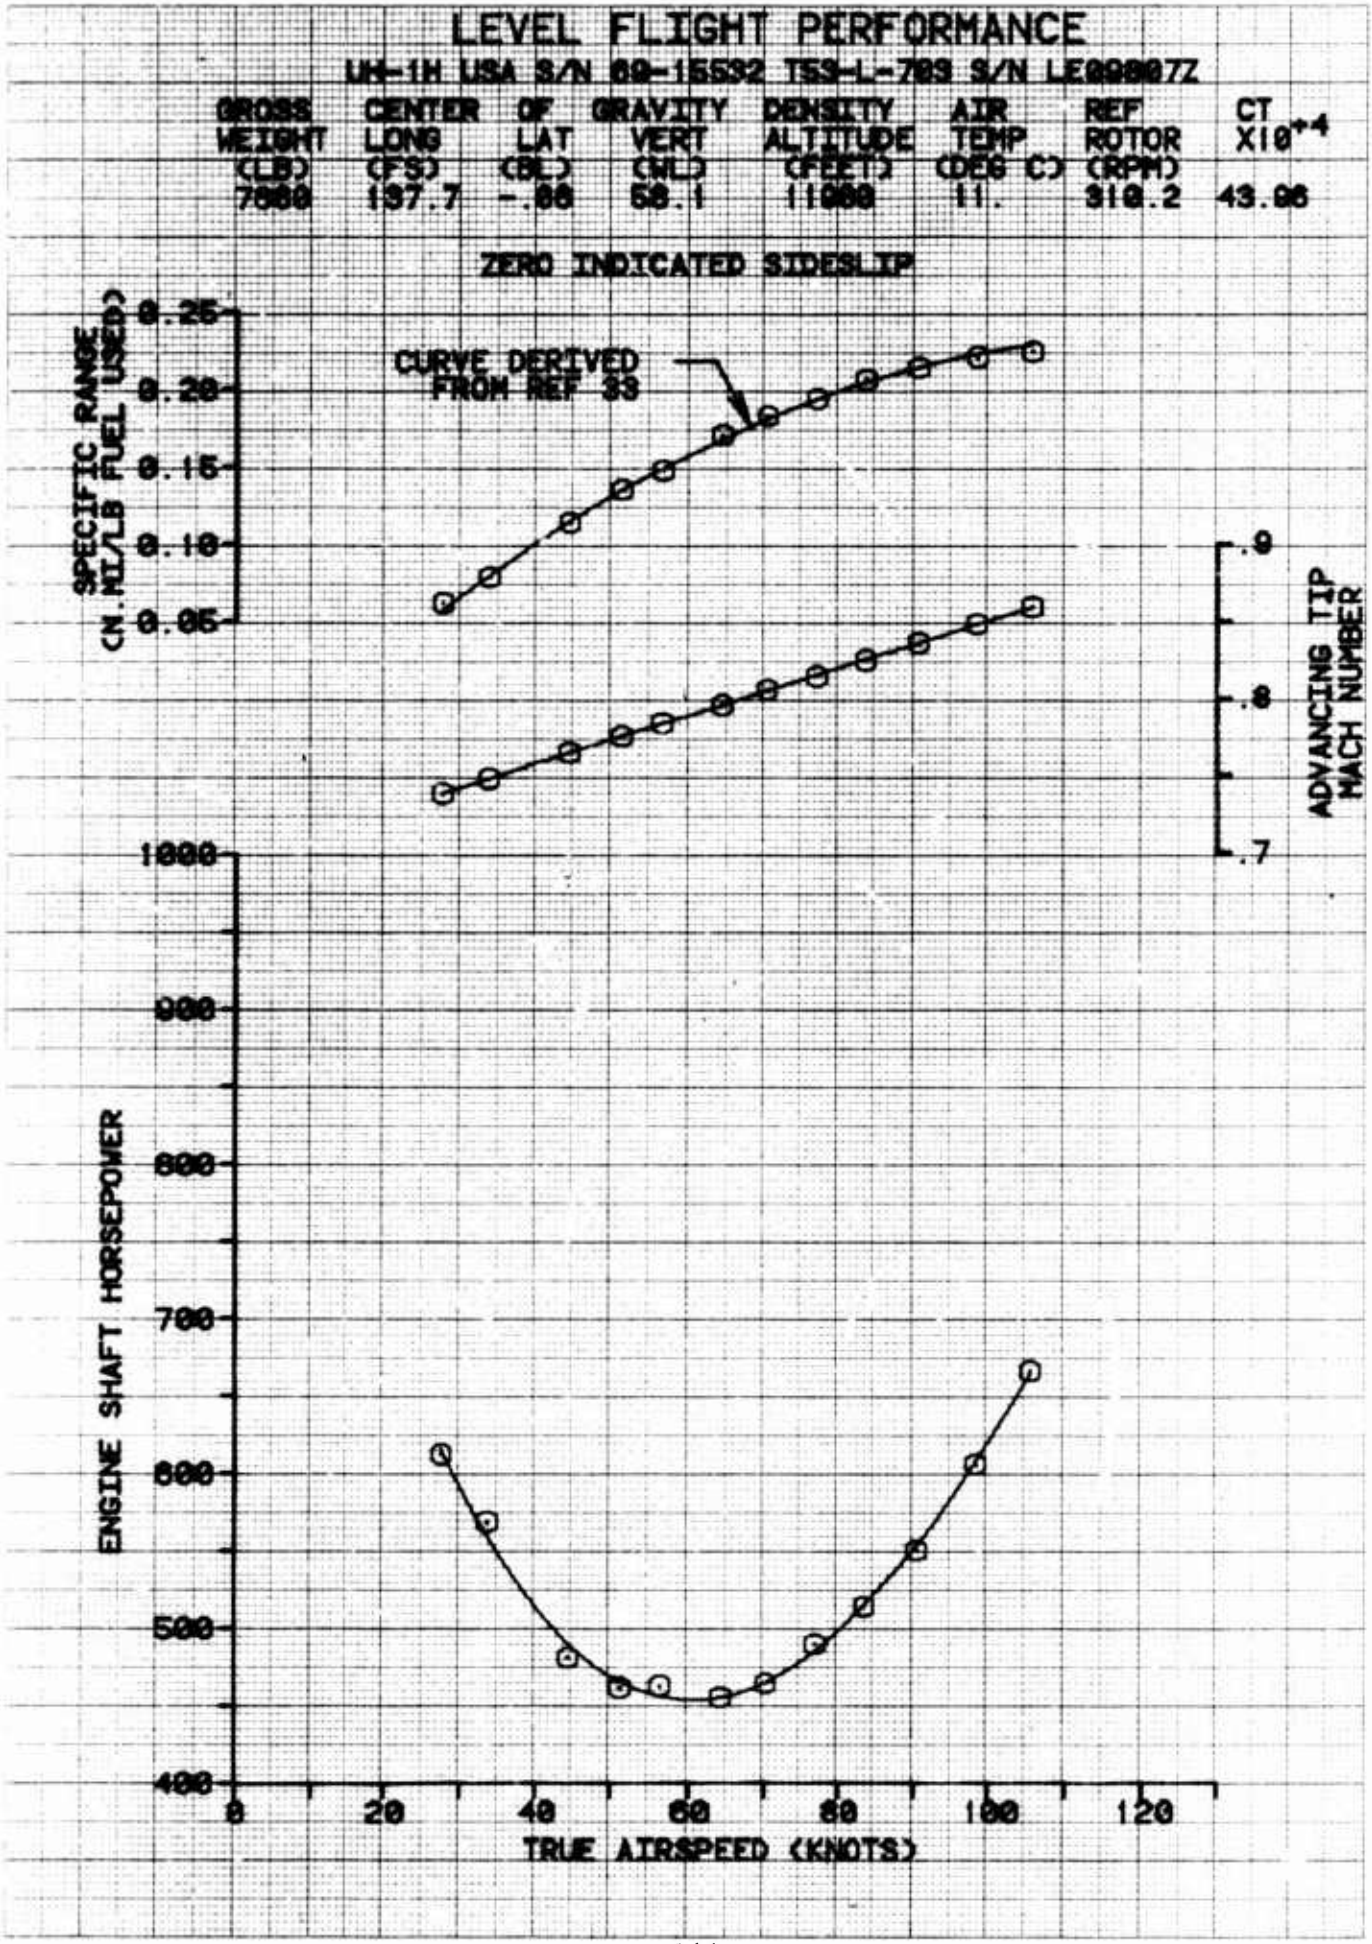

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15532 T53-L-703 S/N LE999077
GROSS WEIGHT (LB) 7000
CENTER OF GRAVITY LONG (FS) 137.7
LAT (BL) -.88
VERT (WL) 58.1
DENSITY ALTITUDE (FEET) 11000
AIR TEMP (DEG C) 11.
REF ROTOR (RPM) 310.2
CT X10**4 43.96
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
.9
.8
.7
ADVANCING TIP MACH NUMBER
1000
900
800
700
600
500
400
ENGINE SHAFT HORSEPOWER
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 28

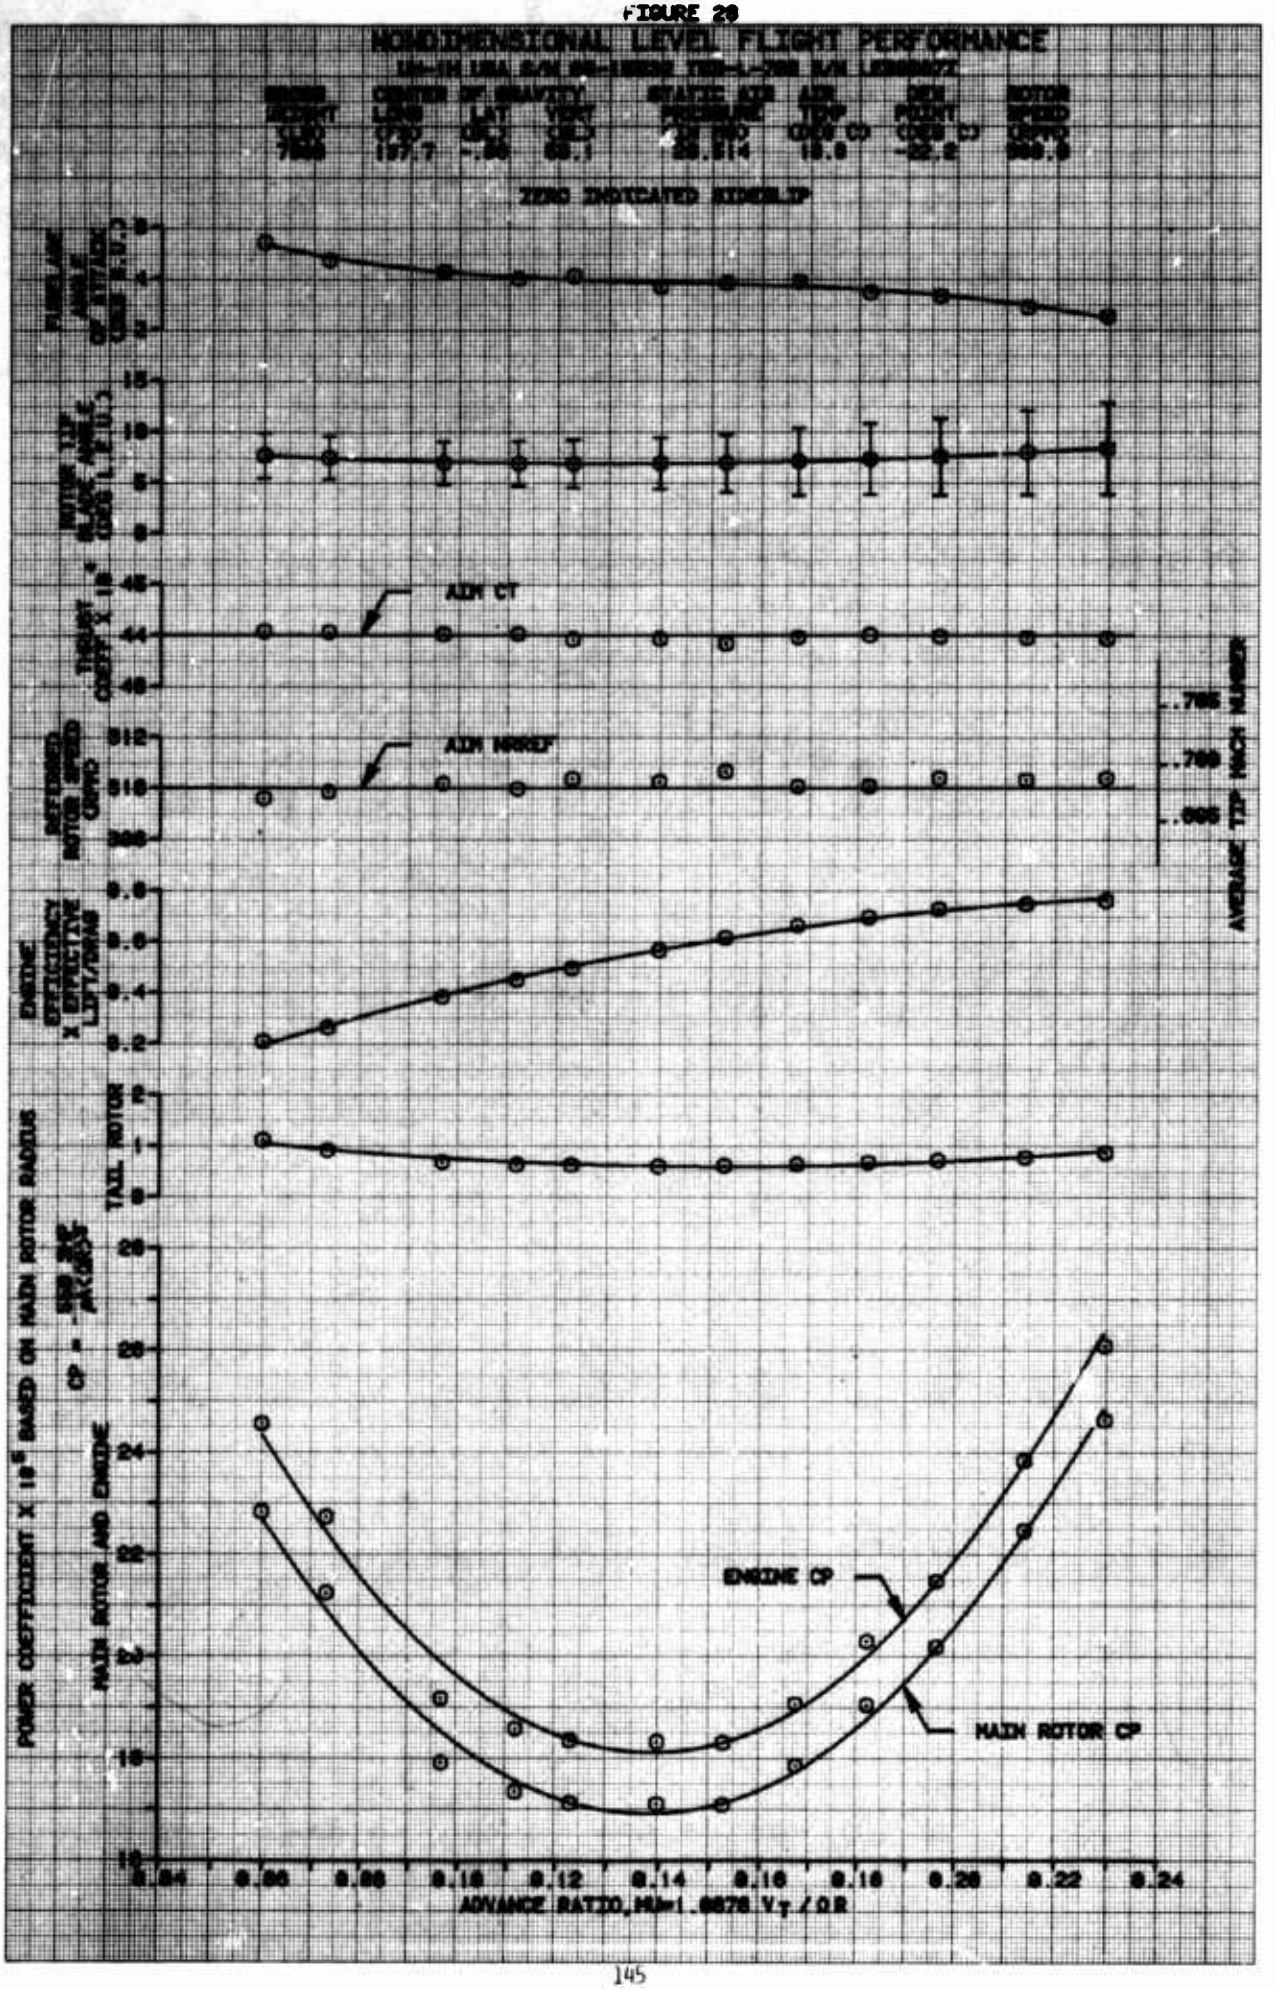

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN NOREP
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
TAIL ROTOR
MAIN ROTOR AND ENGINE
ADVANCE RATIO, M(b=1.0878 V_T / ΩR

FIGURE 28

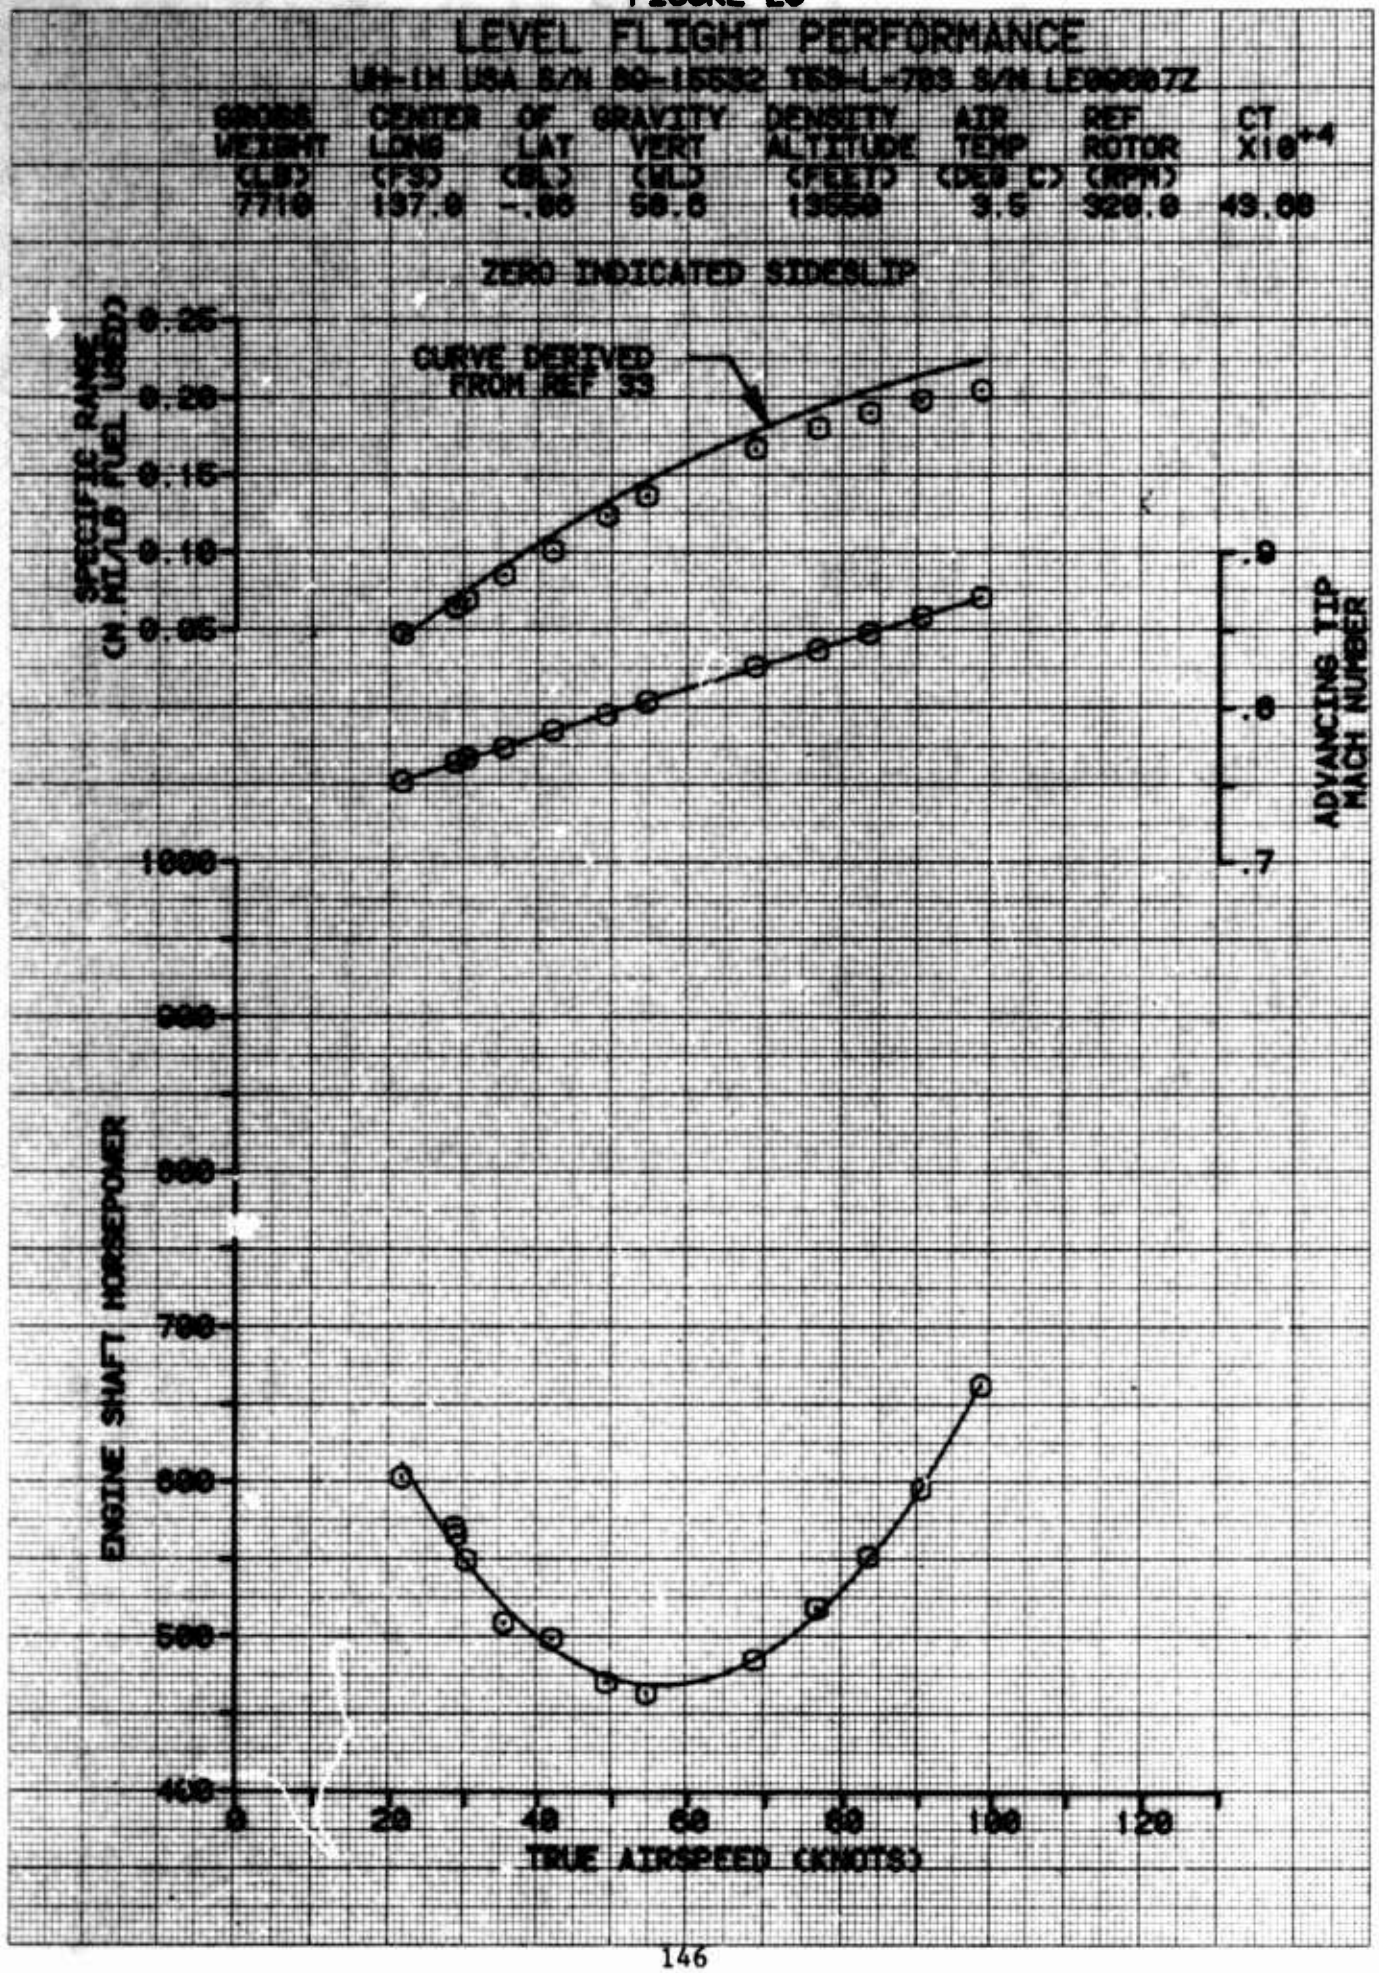

LEVEL FLIGHT PERFORMANCE
GROSS WEIGHT (LB) 7710
CENTER OF GRAVITY LONG (FS) 197.0
LAT (BL) -.66
VERT (WL) 58.6
DENSITY ALTITUDE (FEET) 15650
AIR TEMP (DEG C) 3.5
REF ROTOR (RPM) 320.0
CT X10**4 49.66
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC RANGE (N.M./LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 30

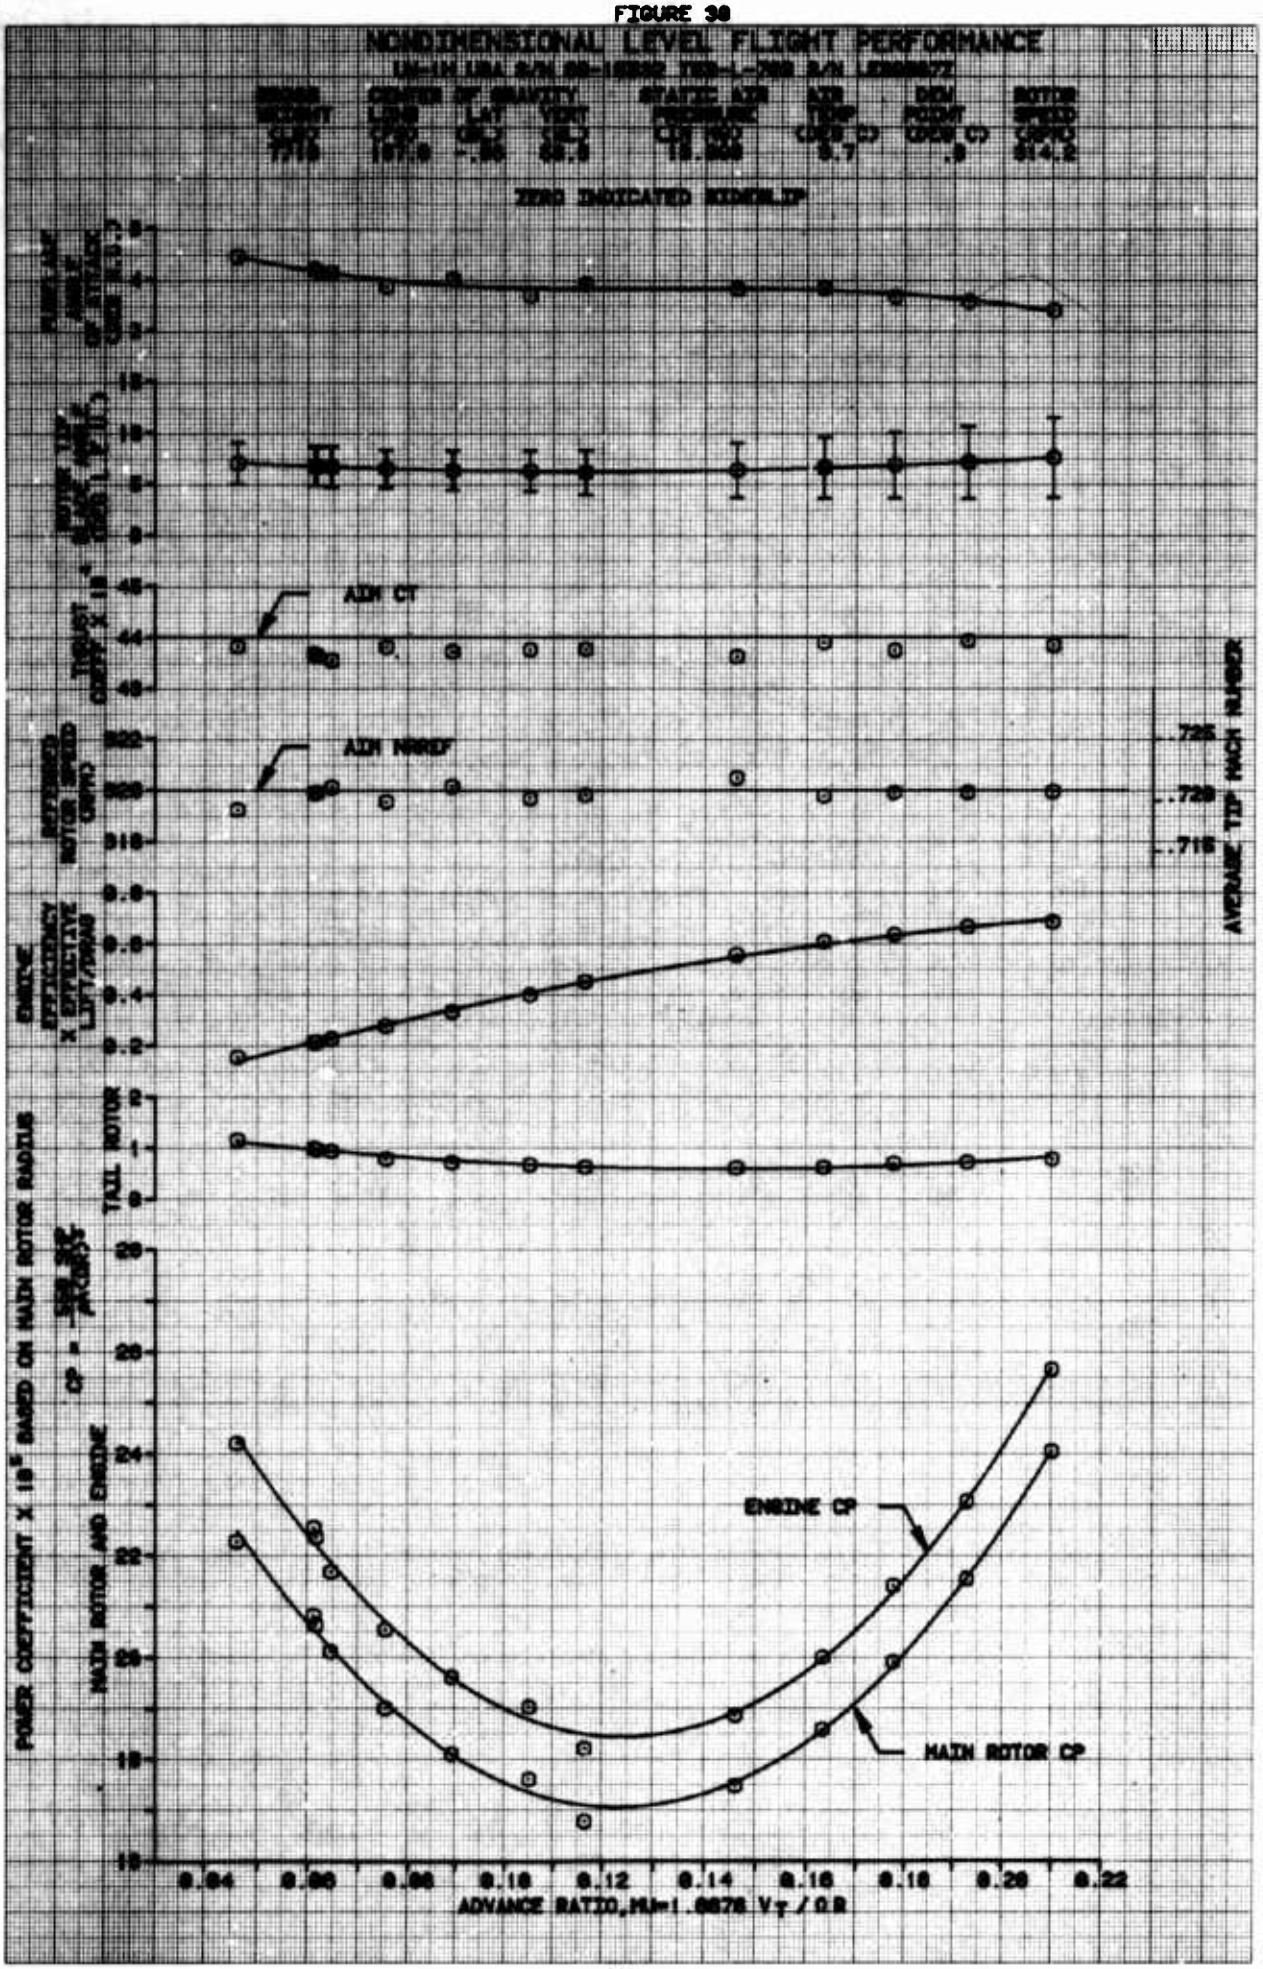

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN NRREF
ENGINE CP
MAIN ROTOR CP
ADVANCE RATIO, MH=1.6876 VT / ΩR

FIGURE 31

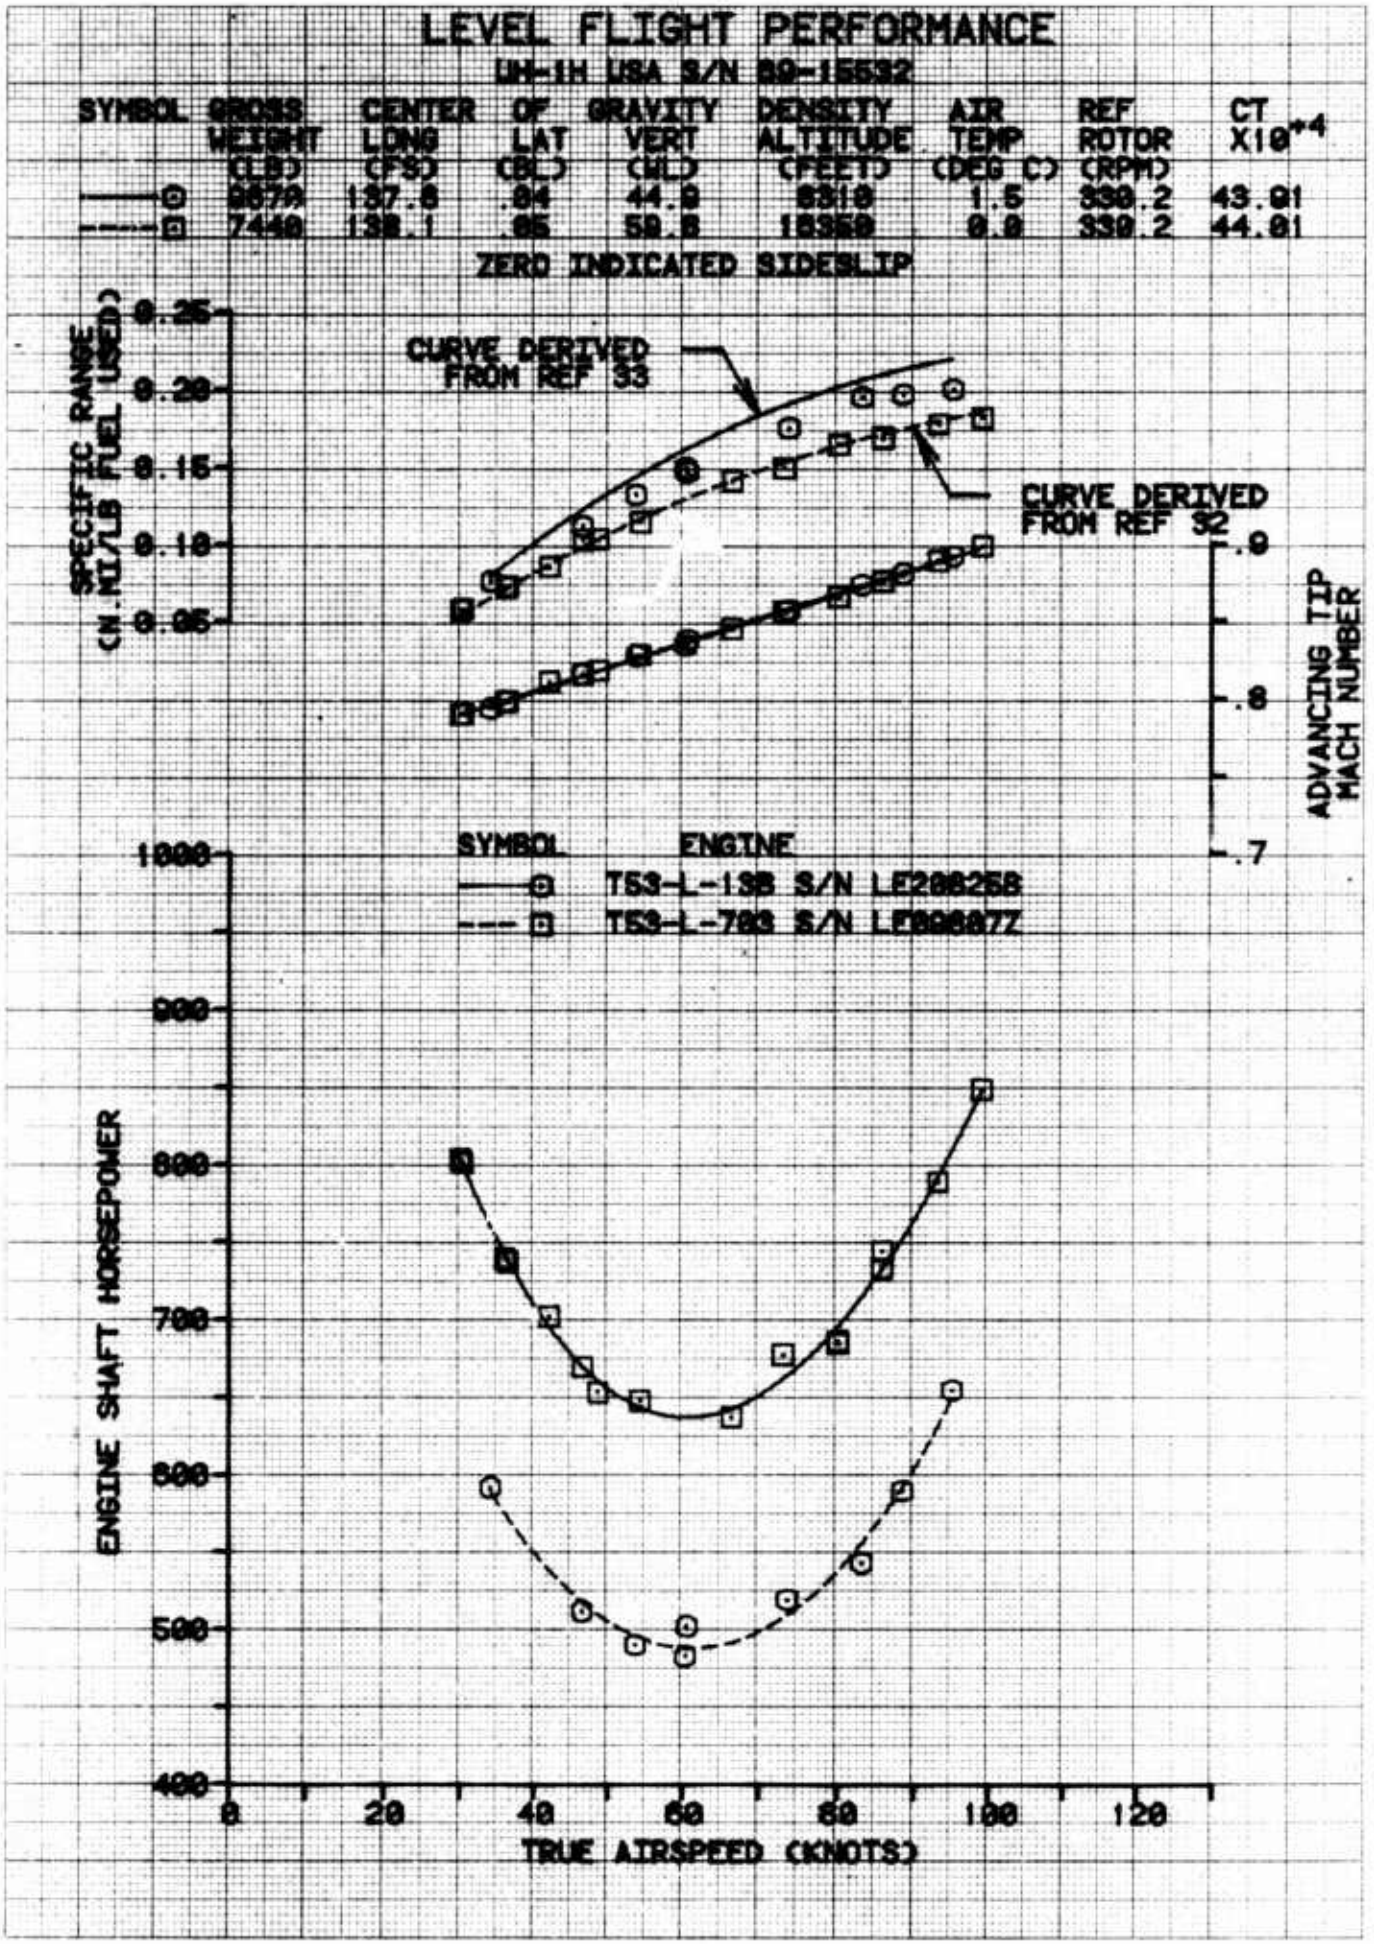

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15532
SYMBOL GROSS WEIGHT (LB) CENTER OF GRAVITY LONG (FS) LAT (BL) VERT (WL) DENSITY ALTITUDE (FEET) AIR TEMP (DEG C) REF ROTOR (RPM) CT X10**4
8679 137.8 .04 44.9 6310 1.5 338.2 43.01
7440 138.1 .05 59.8 10350 0.0 338.2 44.01
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
CURVE DERIVED FROM REF 32
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
.9
.8
.7
SYMBOL ENGINE
T53-L-13B S/N LE208258
T53-L-703 S/N LE206877
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 32

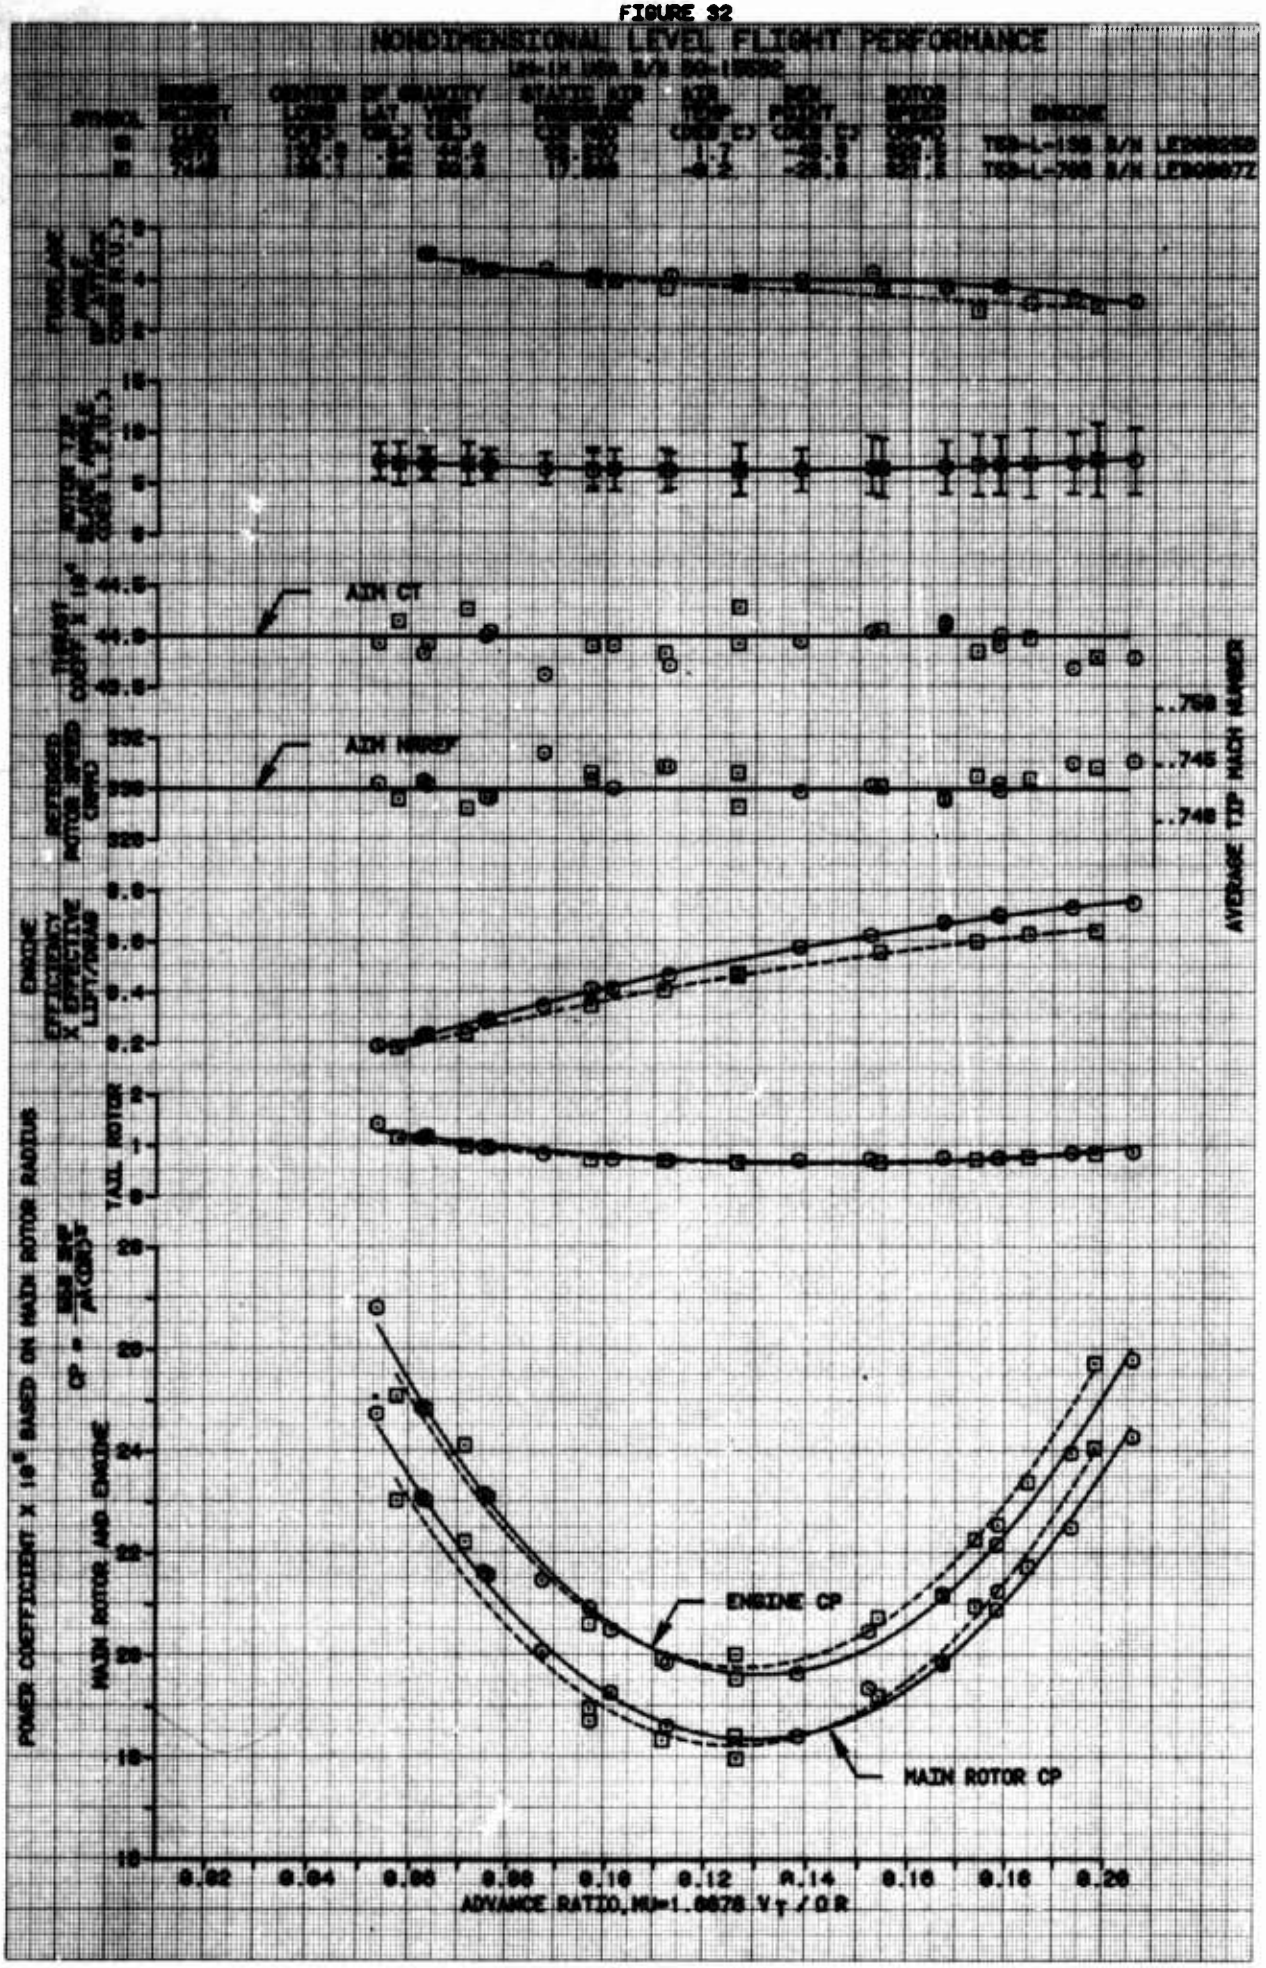

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
AIN CT
AIN MRSF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
ADVANCE RATIO, MU=1.6878 Vt / ΩR

FIGURE 33

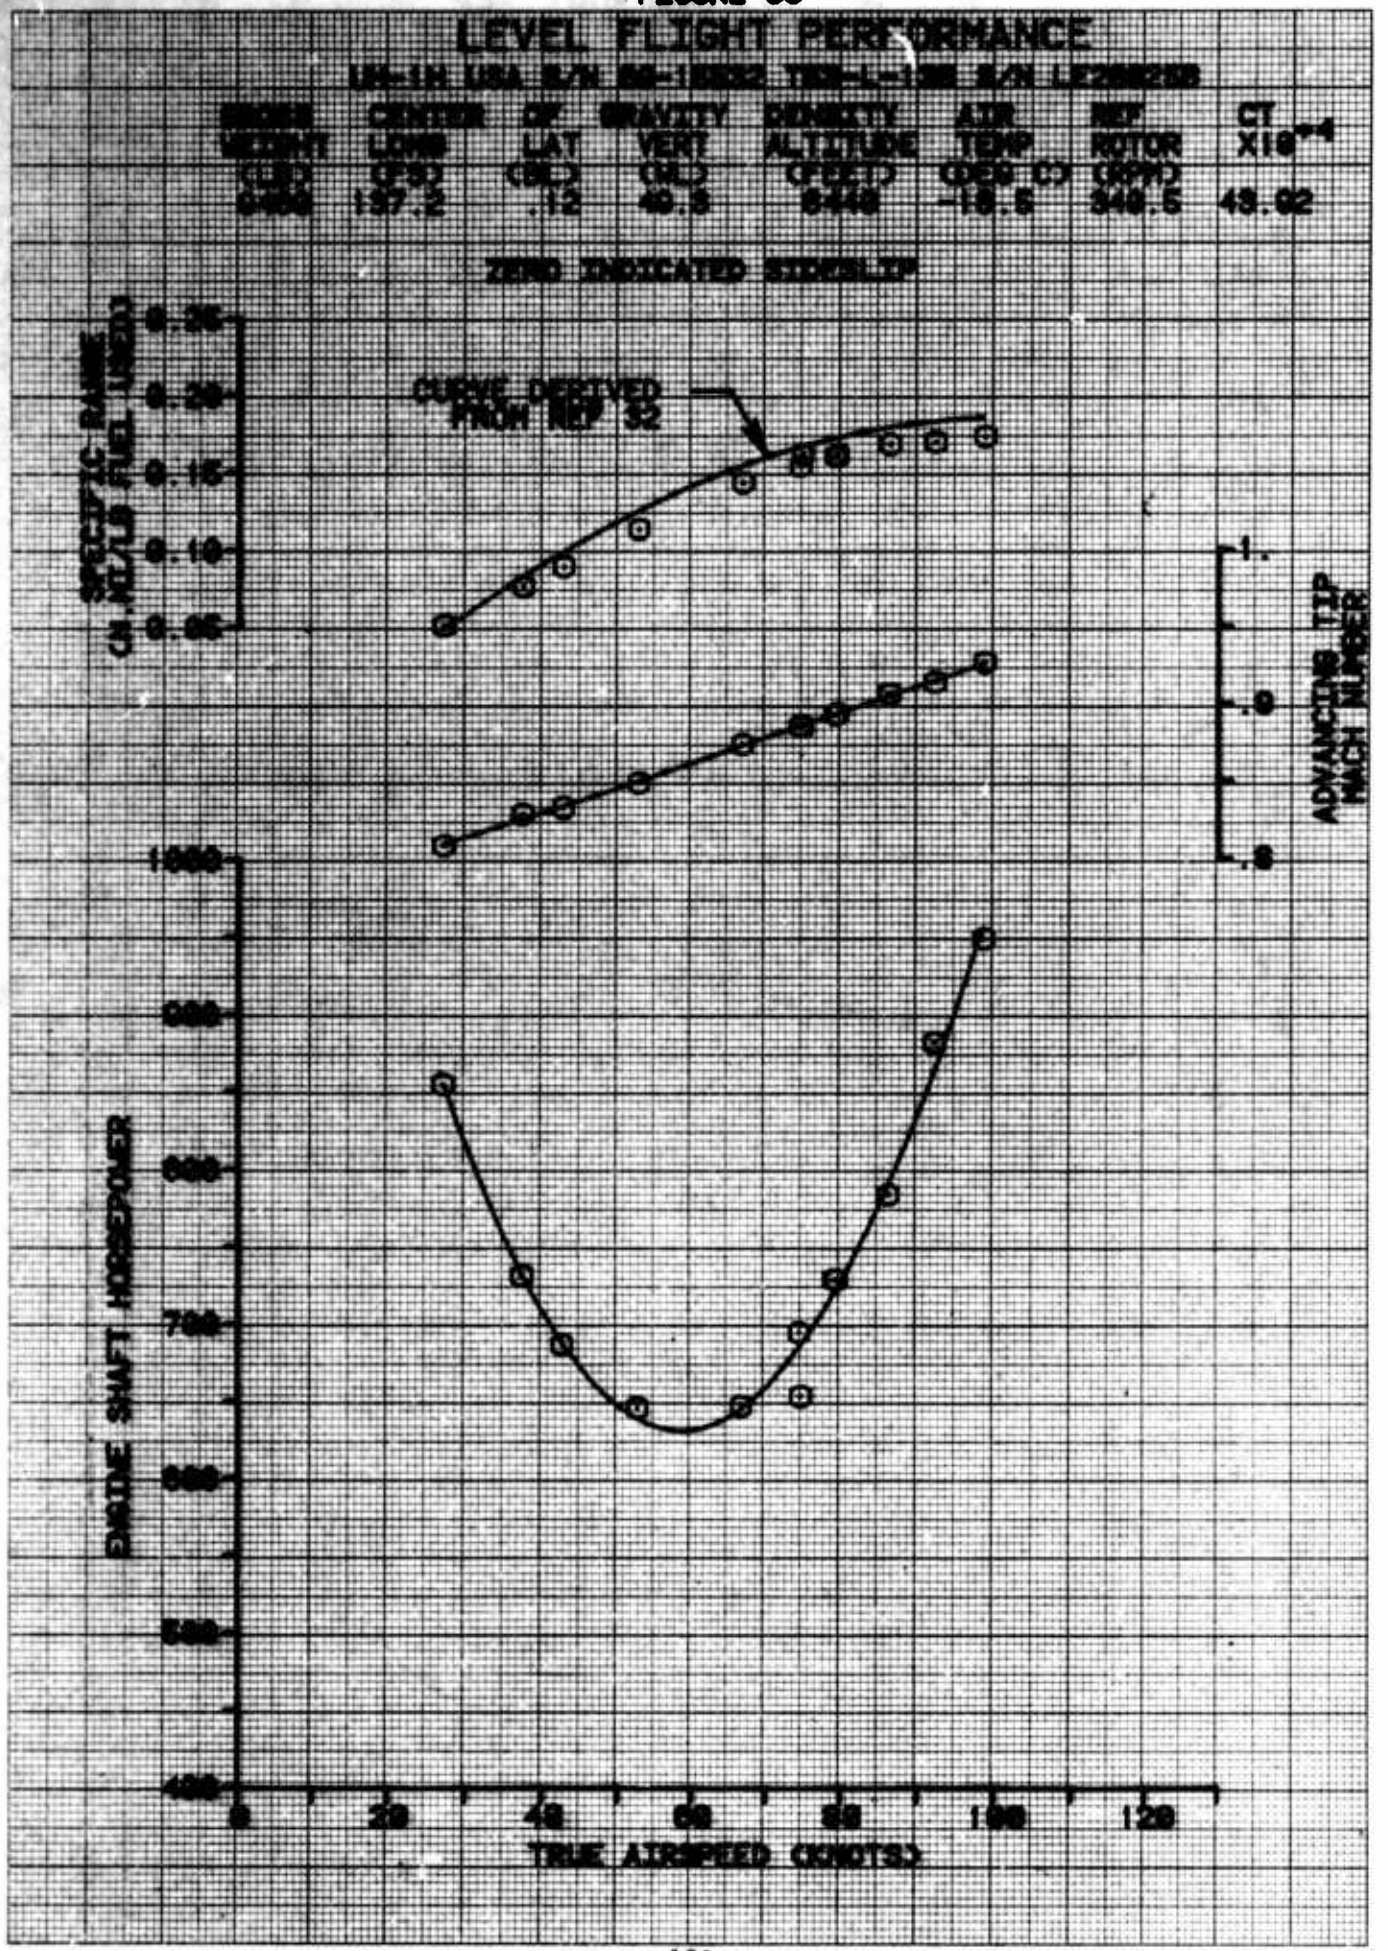

LEVEL FLIGHT PERFORMANCE
CENTER OF GRAVITY
LONG LAT VERT
(FS) (BL) (WL)
197.2 .12 46.5
DENSITY ALTITUDE
6448
AIR TEMP
-16.6
REF ROTOR (RPM)
348.5
CT X10**4
49.02
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 32
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
DRIVE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
ADVANCING TIP MACH NUMBER
1.
.9
.8
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 34

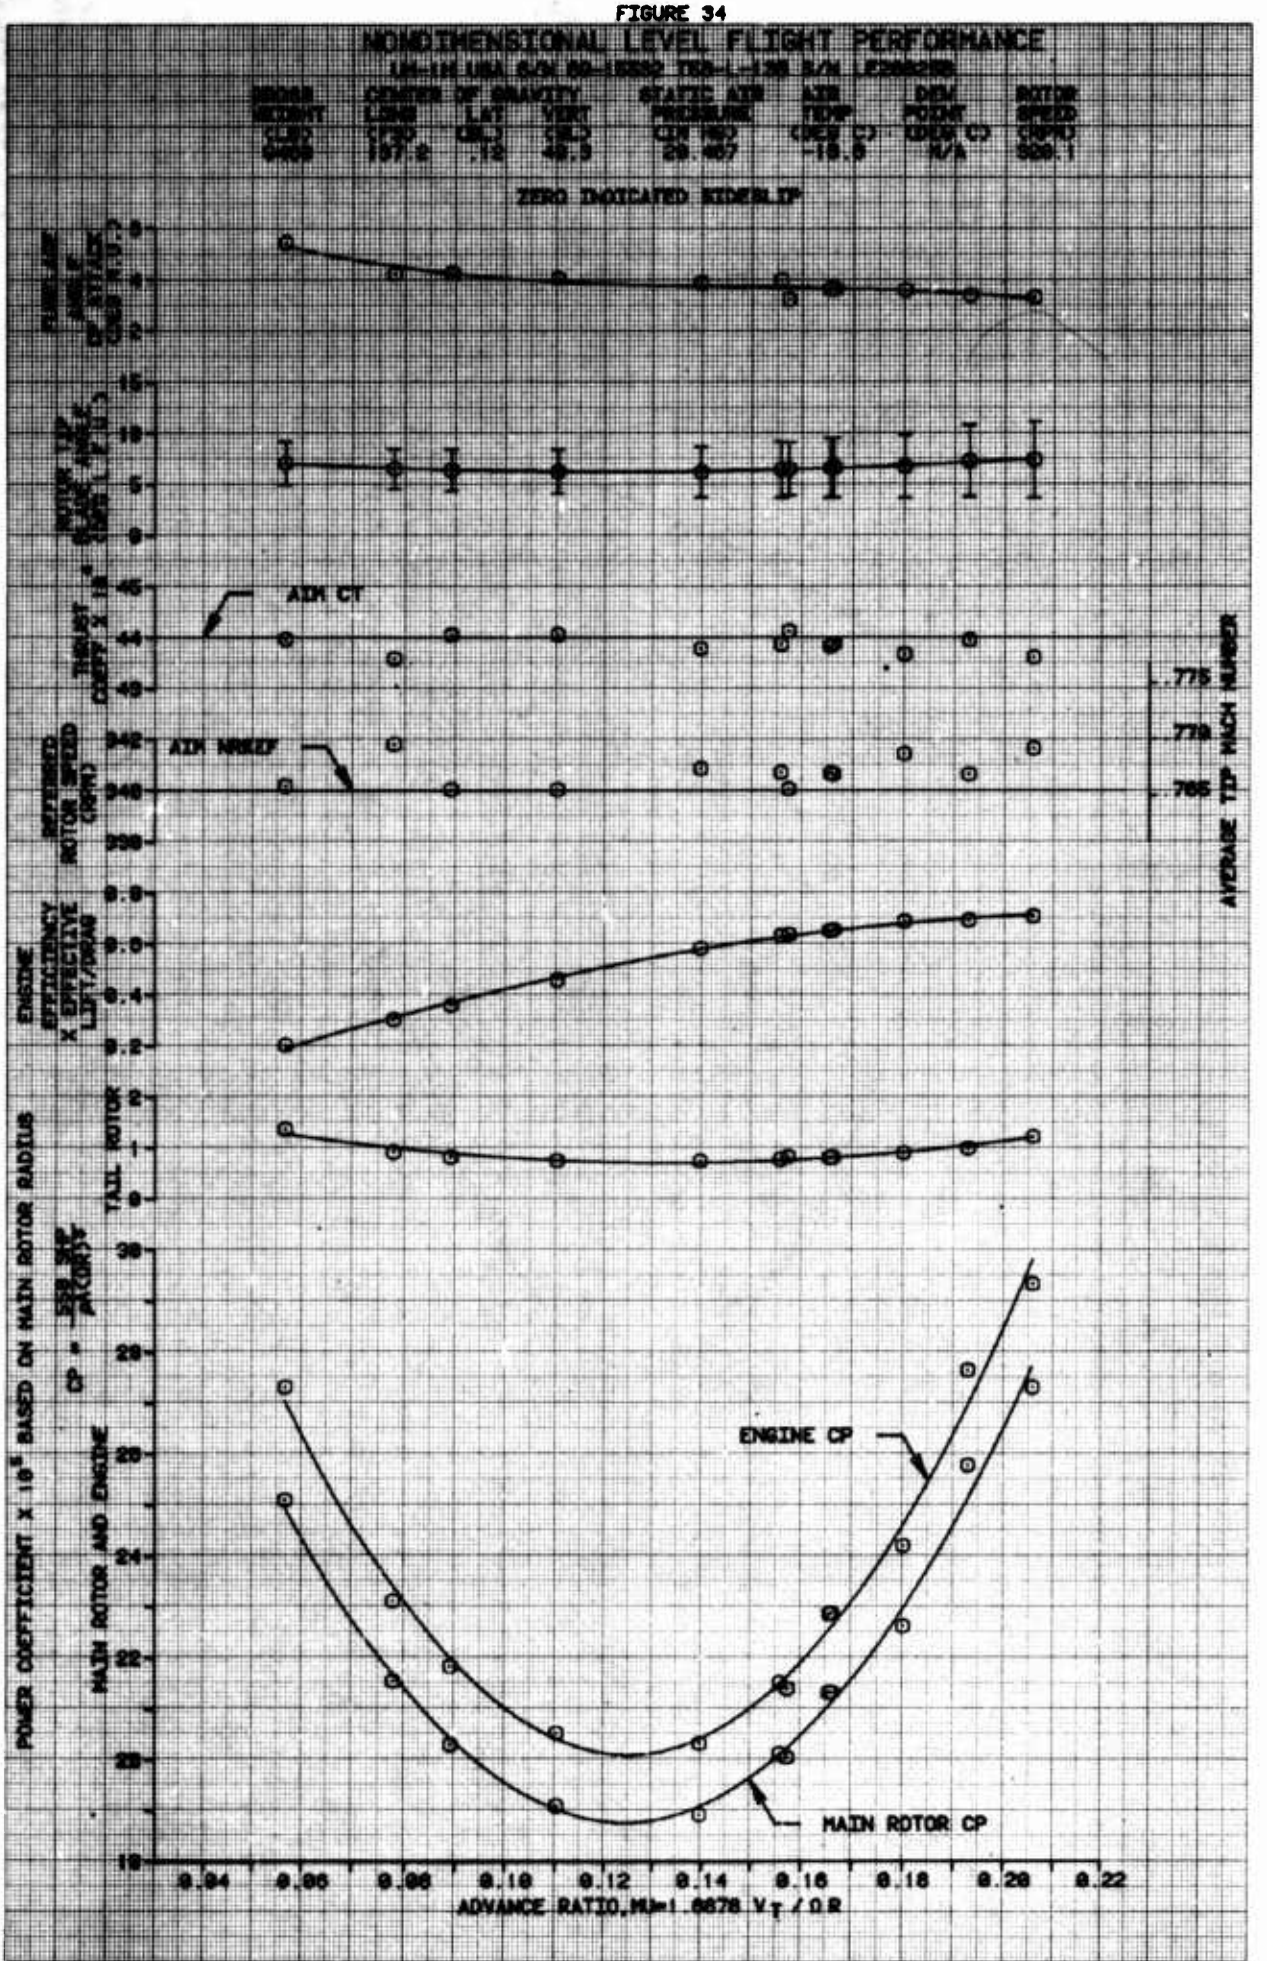

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
ADM CT
ADM MREF
AVERAGE TIP MACH NUMBER
.775
.770
.765
ENGINE CP
MAIN ROTOR CP
POWER COEFFICIENT X 10⁵ BASED ON MAIN ROTOR RADIUS
MAIN ROTOR AND ENGINE
TAIL ROTOR
ENGINE EFFICIENCY X EFFECTIVE LIFT/DRAG
REFERRED ROTOR SPEED (RPM)
ADVANCE RATIO, MU=1.6878 V_T / Ω R

FIGURE 35

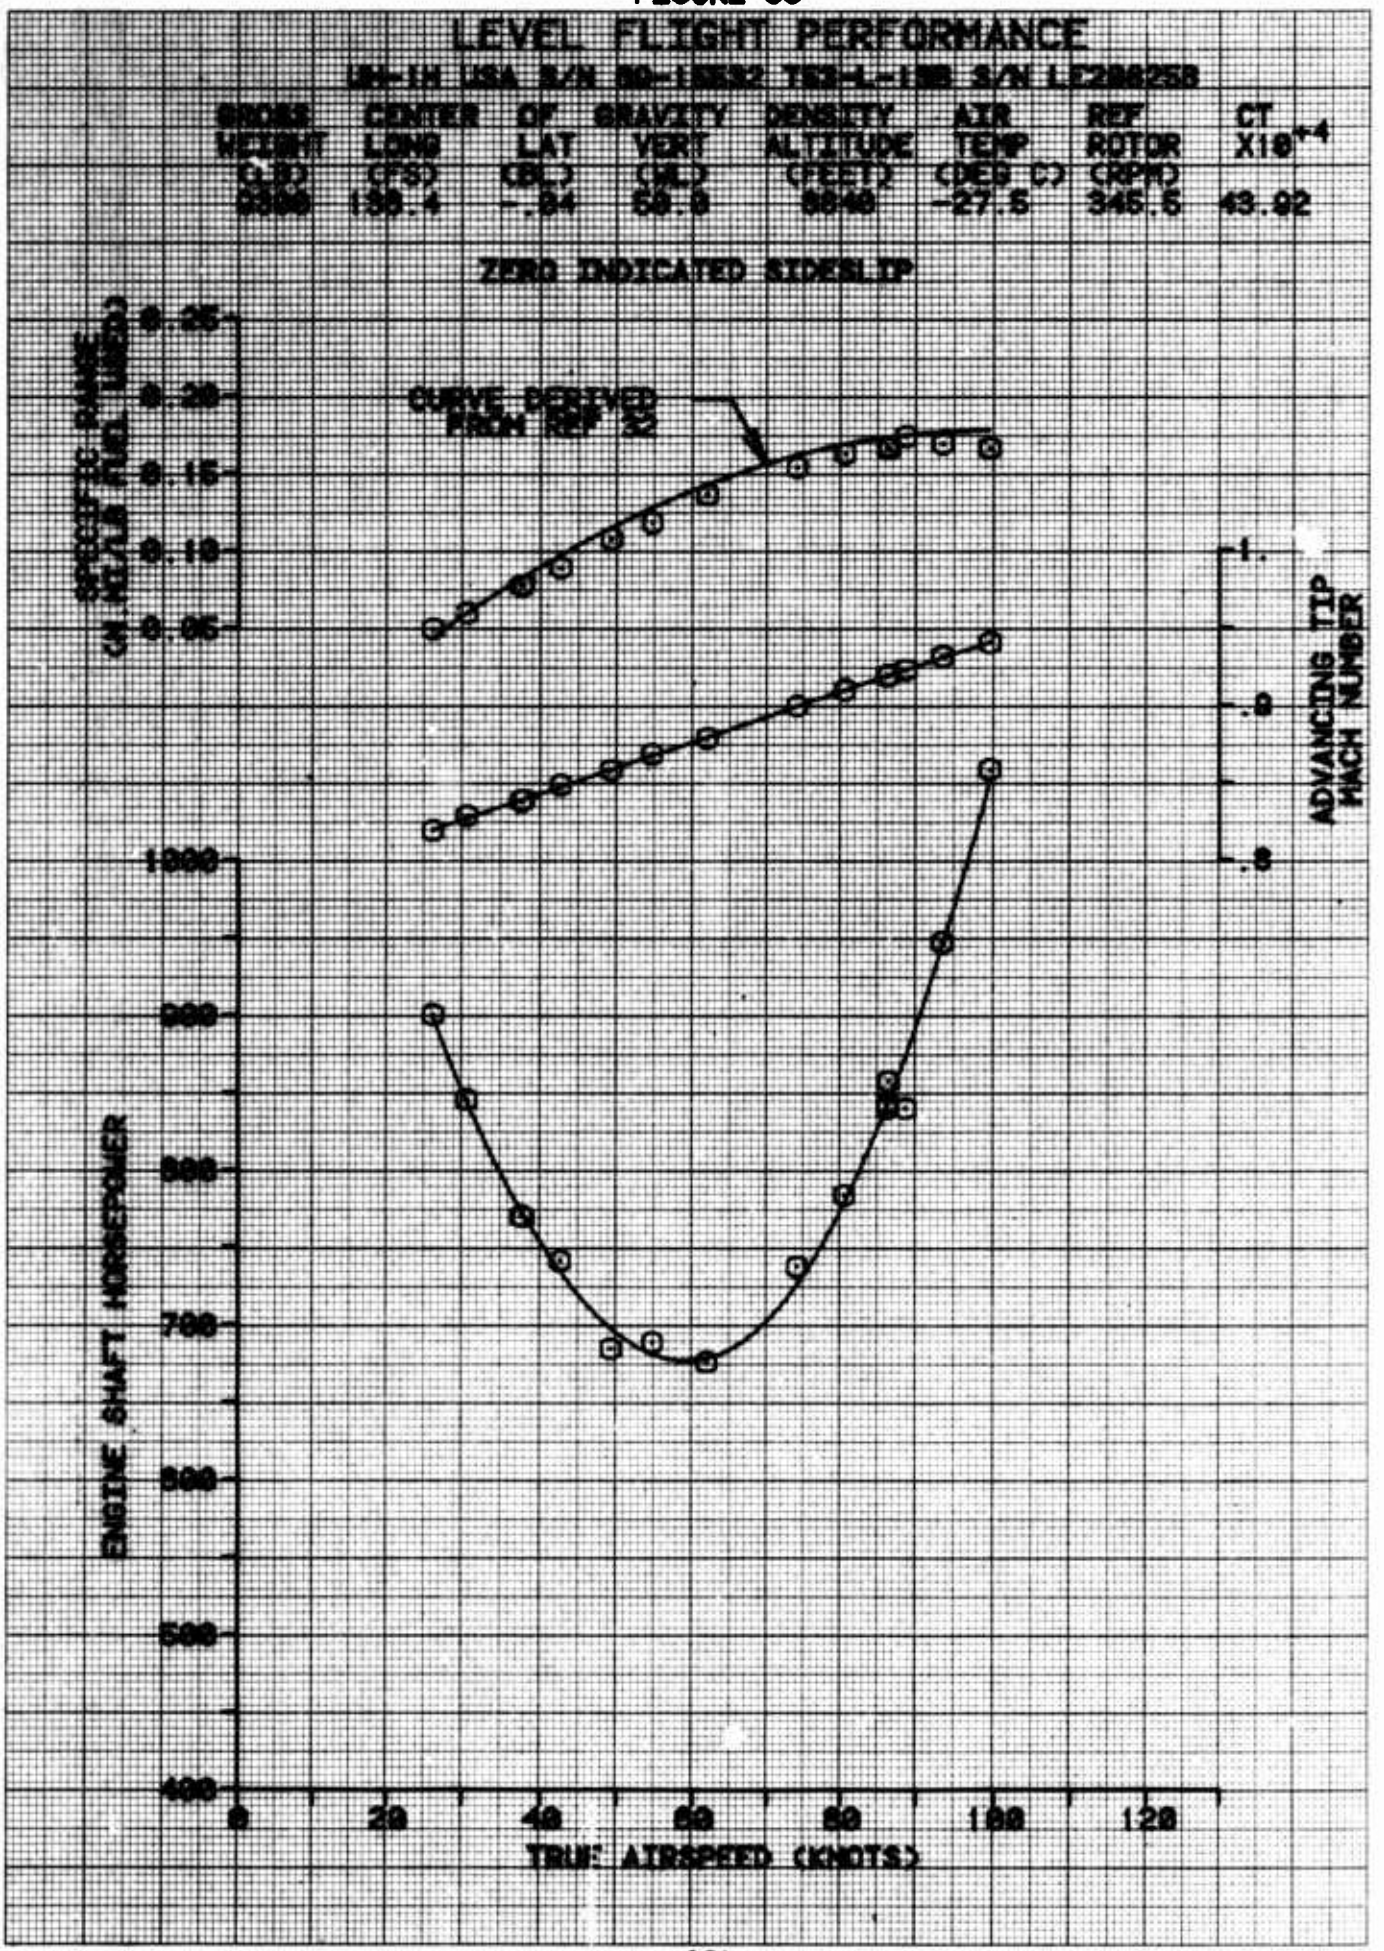

LEVEL FLIGHT PERFORMANCE
GROSS WEIGHT (LB)
CENTER OF GRAVITY LONG (FS)
LAT (BL)
VERT (WL)
DENSITY ALTITUDE (FEET)
AIR TEMP (DEG C)
REF ROTOR (RPM)
CT X10**-4
-27.5
345.6
43.92
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 32
ADVANCING TIP MACH NUMBER
ENGINE SHAFT HORSEPOWER
TRUE AIRSPEED (KNOTS)

FIGURE 38

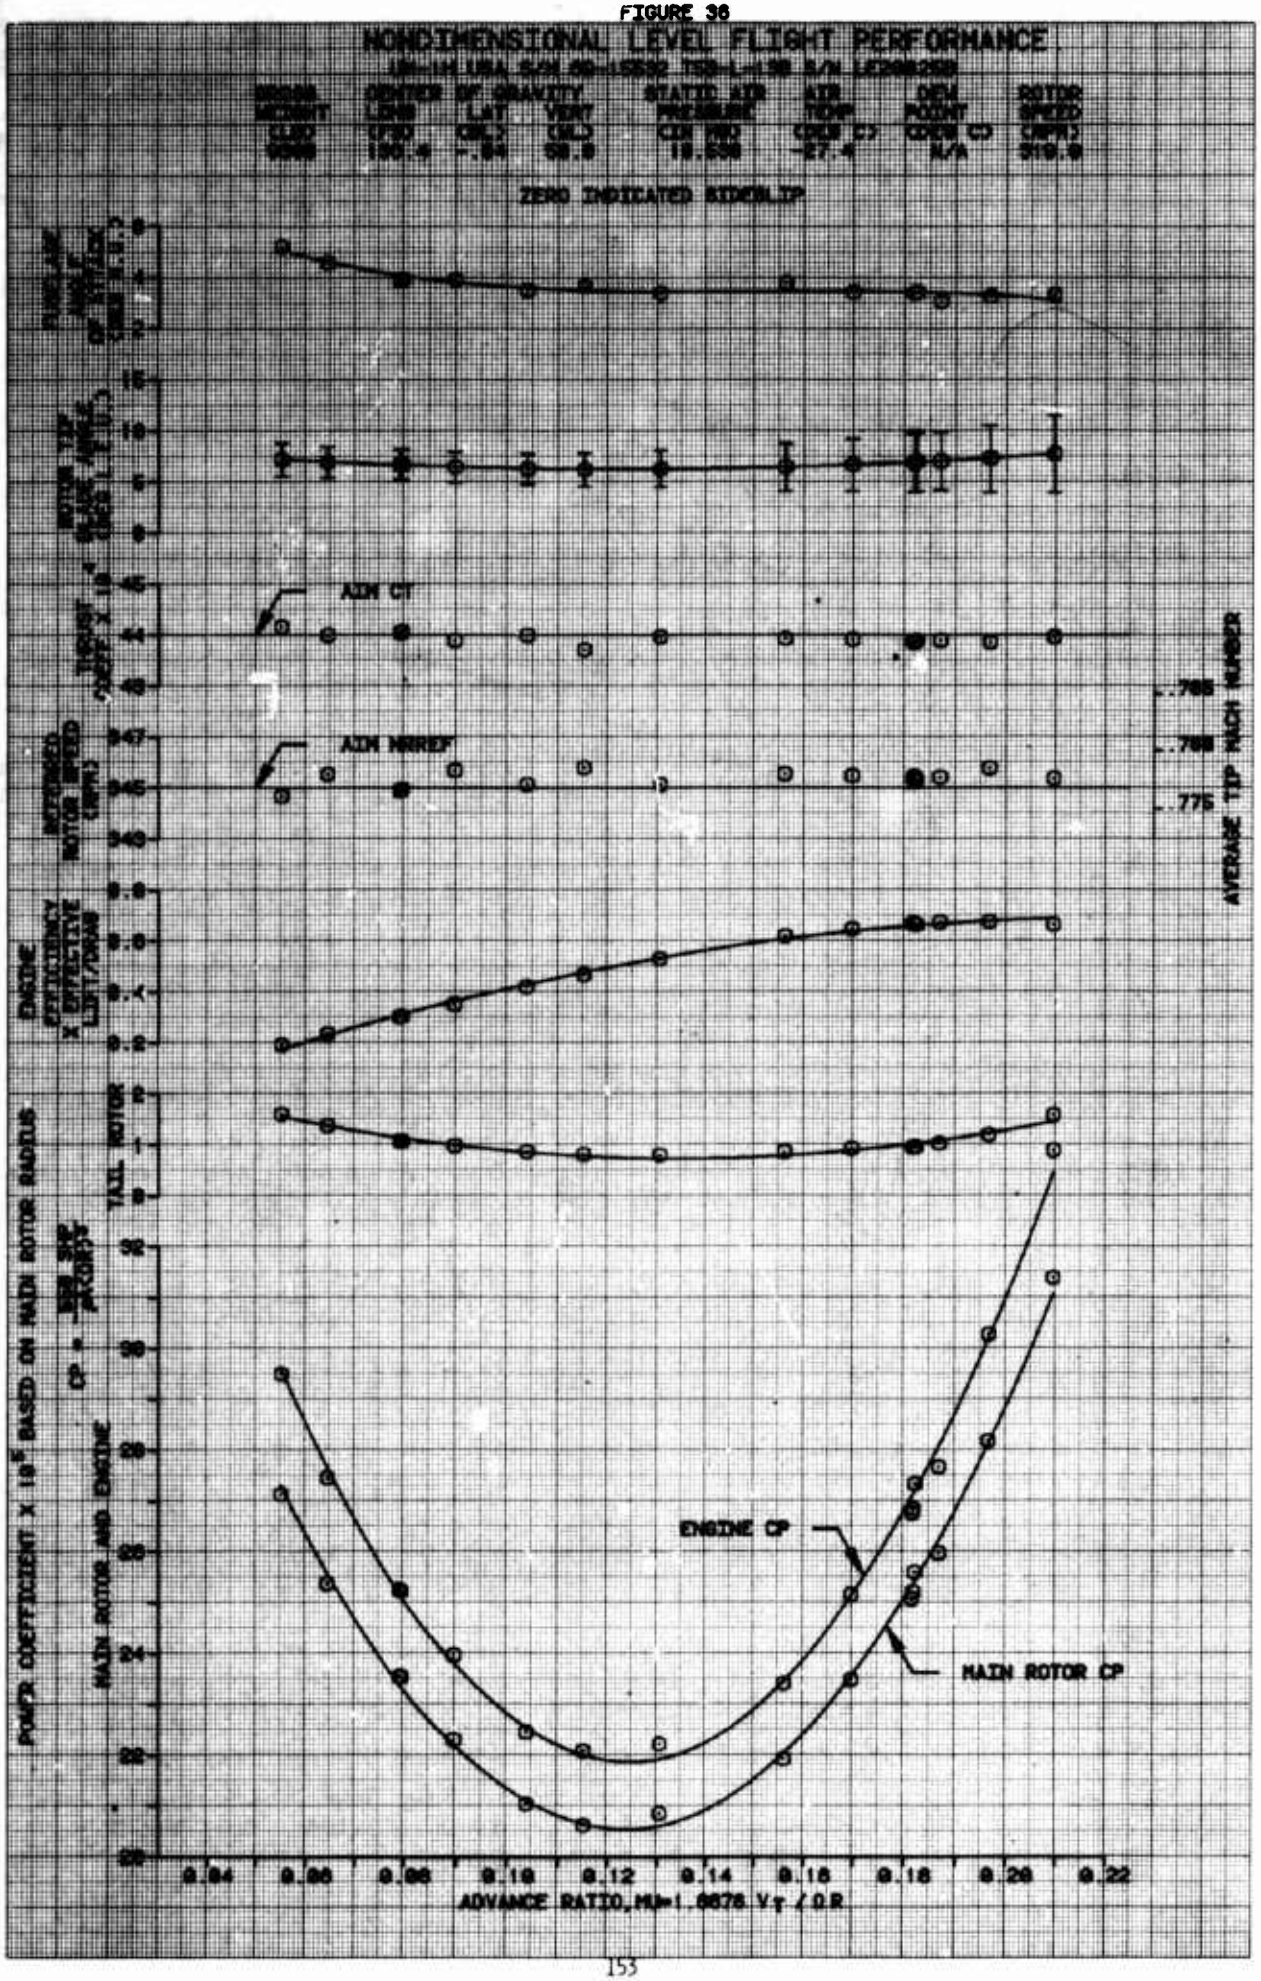

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AVERAGE TIP MACH NUMBER
.765
.770
.775
AXIN CT
AXIN MEREF
ENGINE CP
MAIN ROTOR CP
ADVANCE RATIO, MU=1.6678 V∞ / Ω R
0.04
0.06
0.08
0.10
0.12
0.14
0.16
0.18
0.20
0.22

FIGURE 37

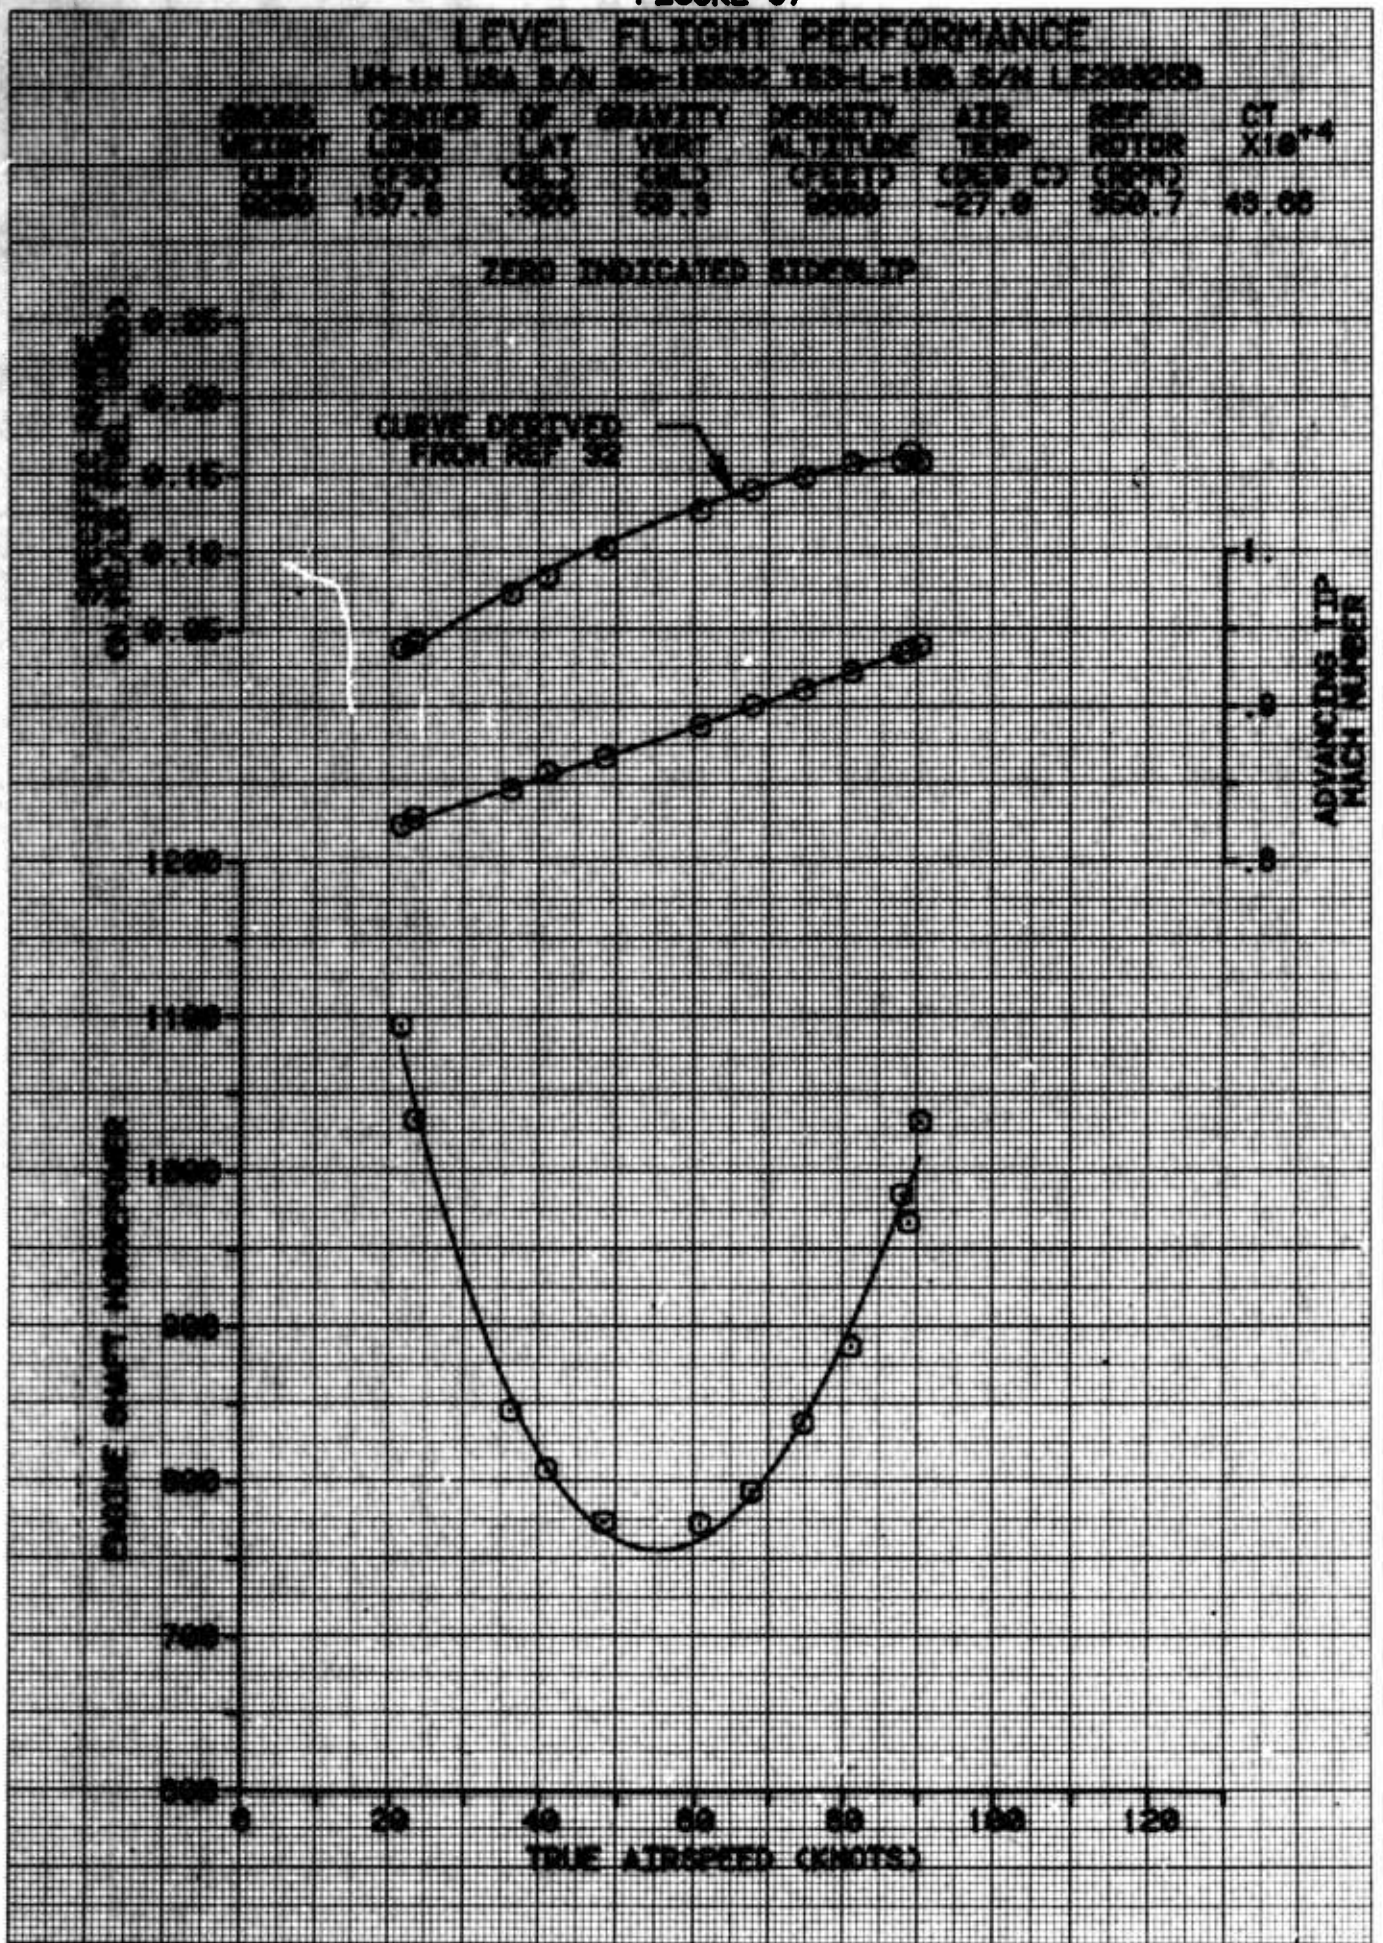

LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 32
ADVANCING TIP MACH NUMBER
TRUE AIRSPEED (KNOTS)
0
20
40
60
80
100
120

FIGURE 38

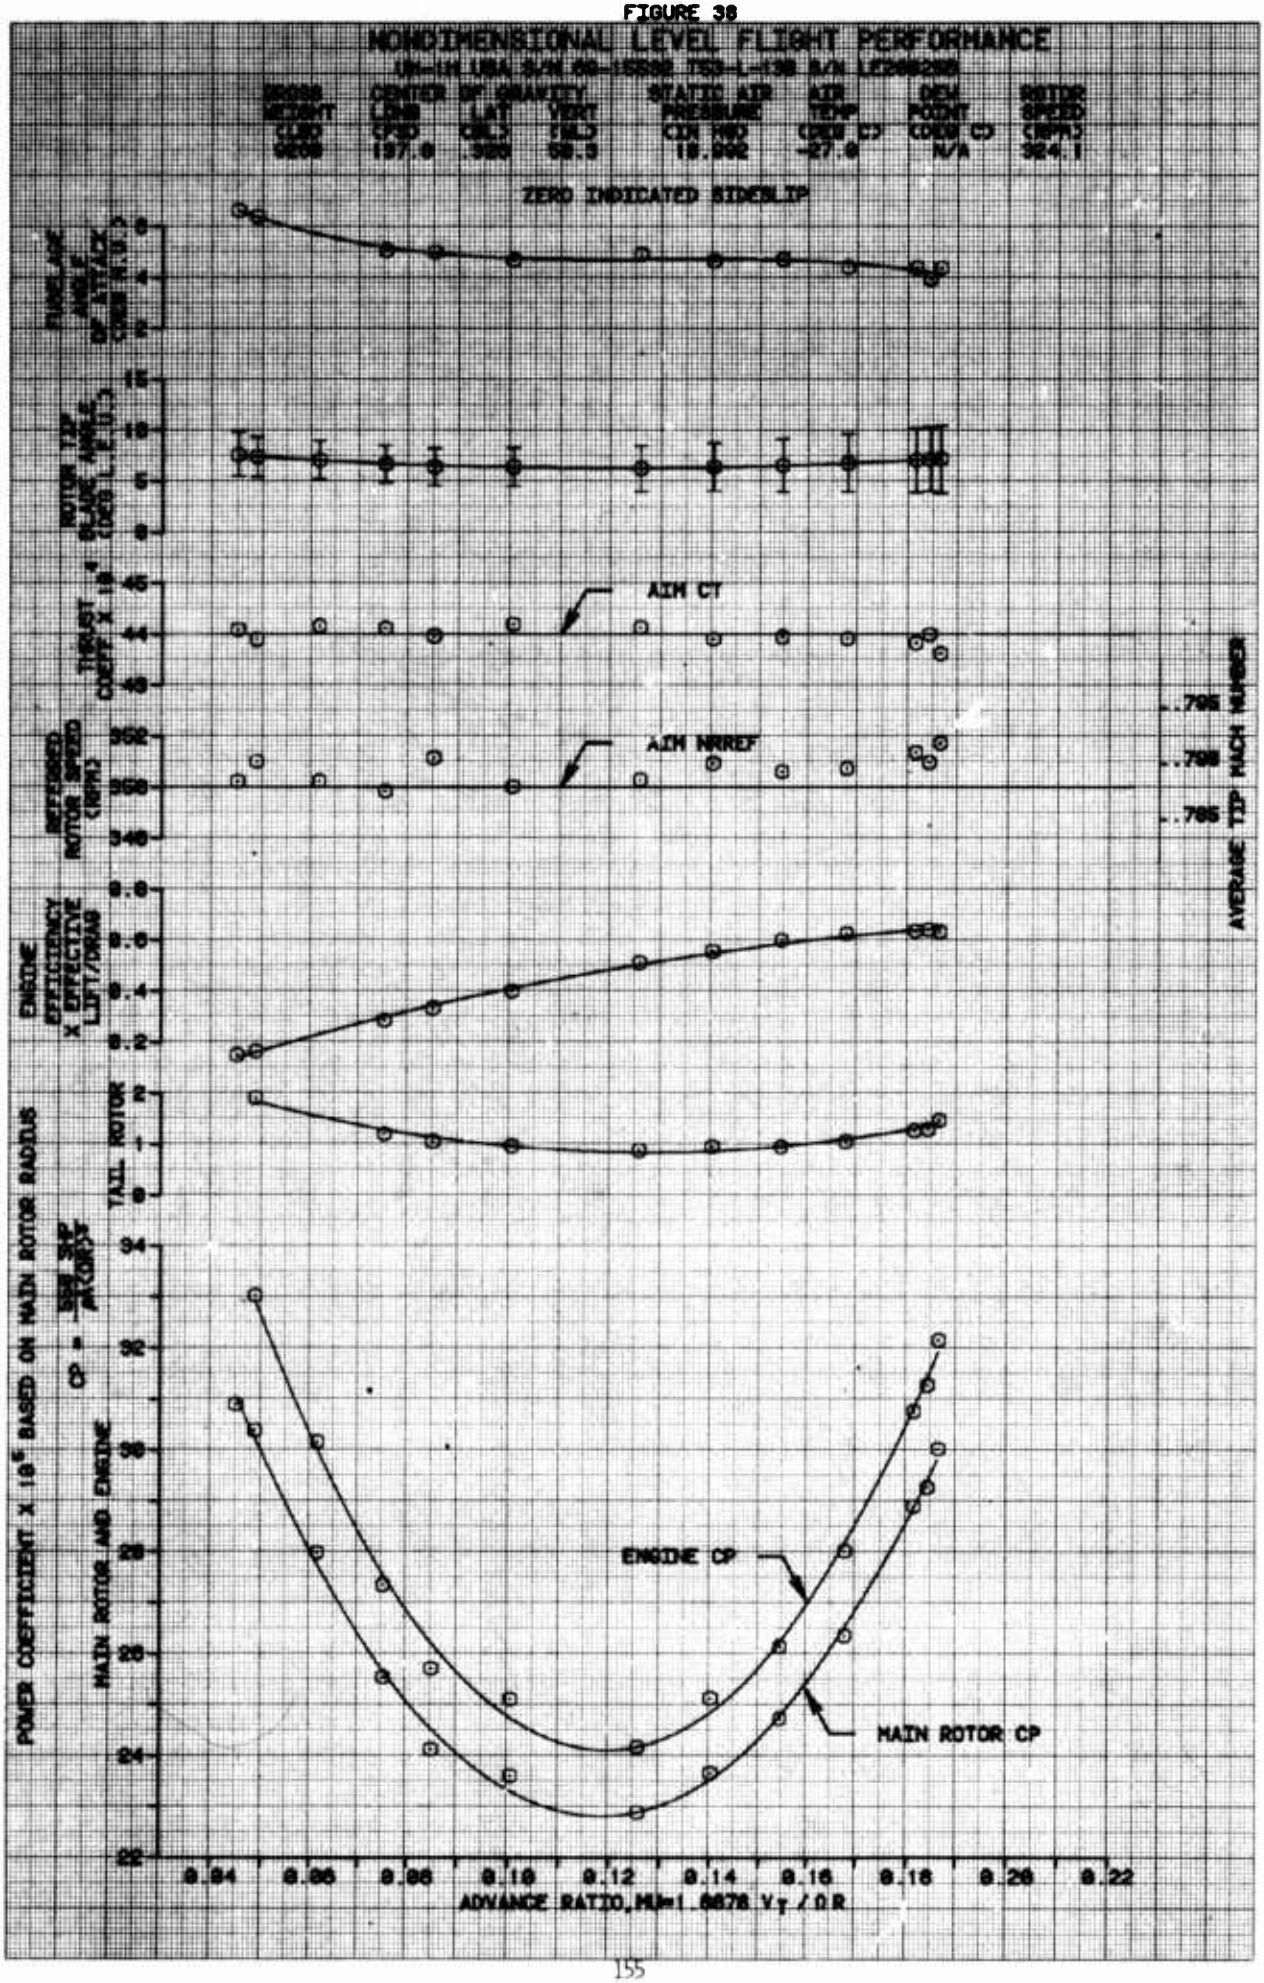

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIM CT
AIM NRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
ADVANCE RATIO, MU=1.6878 VT / ΩR
POWER COEFFICIENT X 10^5 BASED ON MAIN ROTOR RADIUS
MAIN ROTOR AND ENGINE
TAIL ROTOR

FIGURE 39

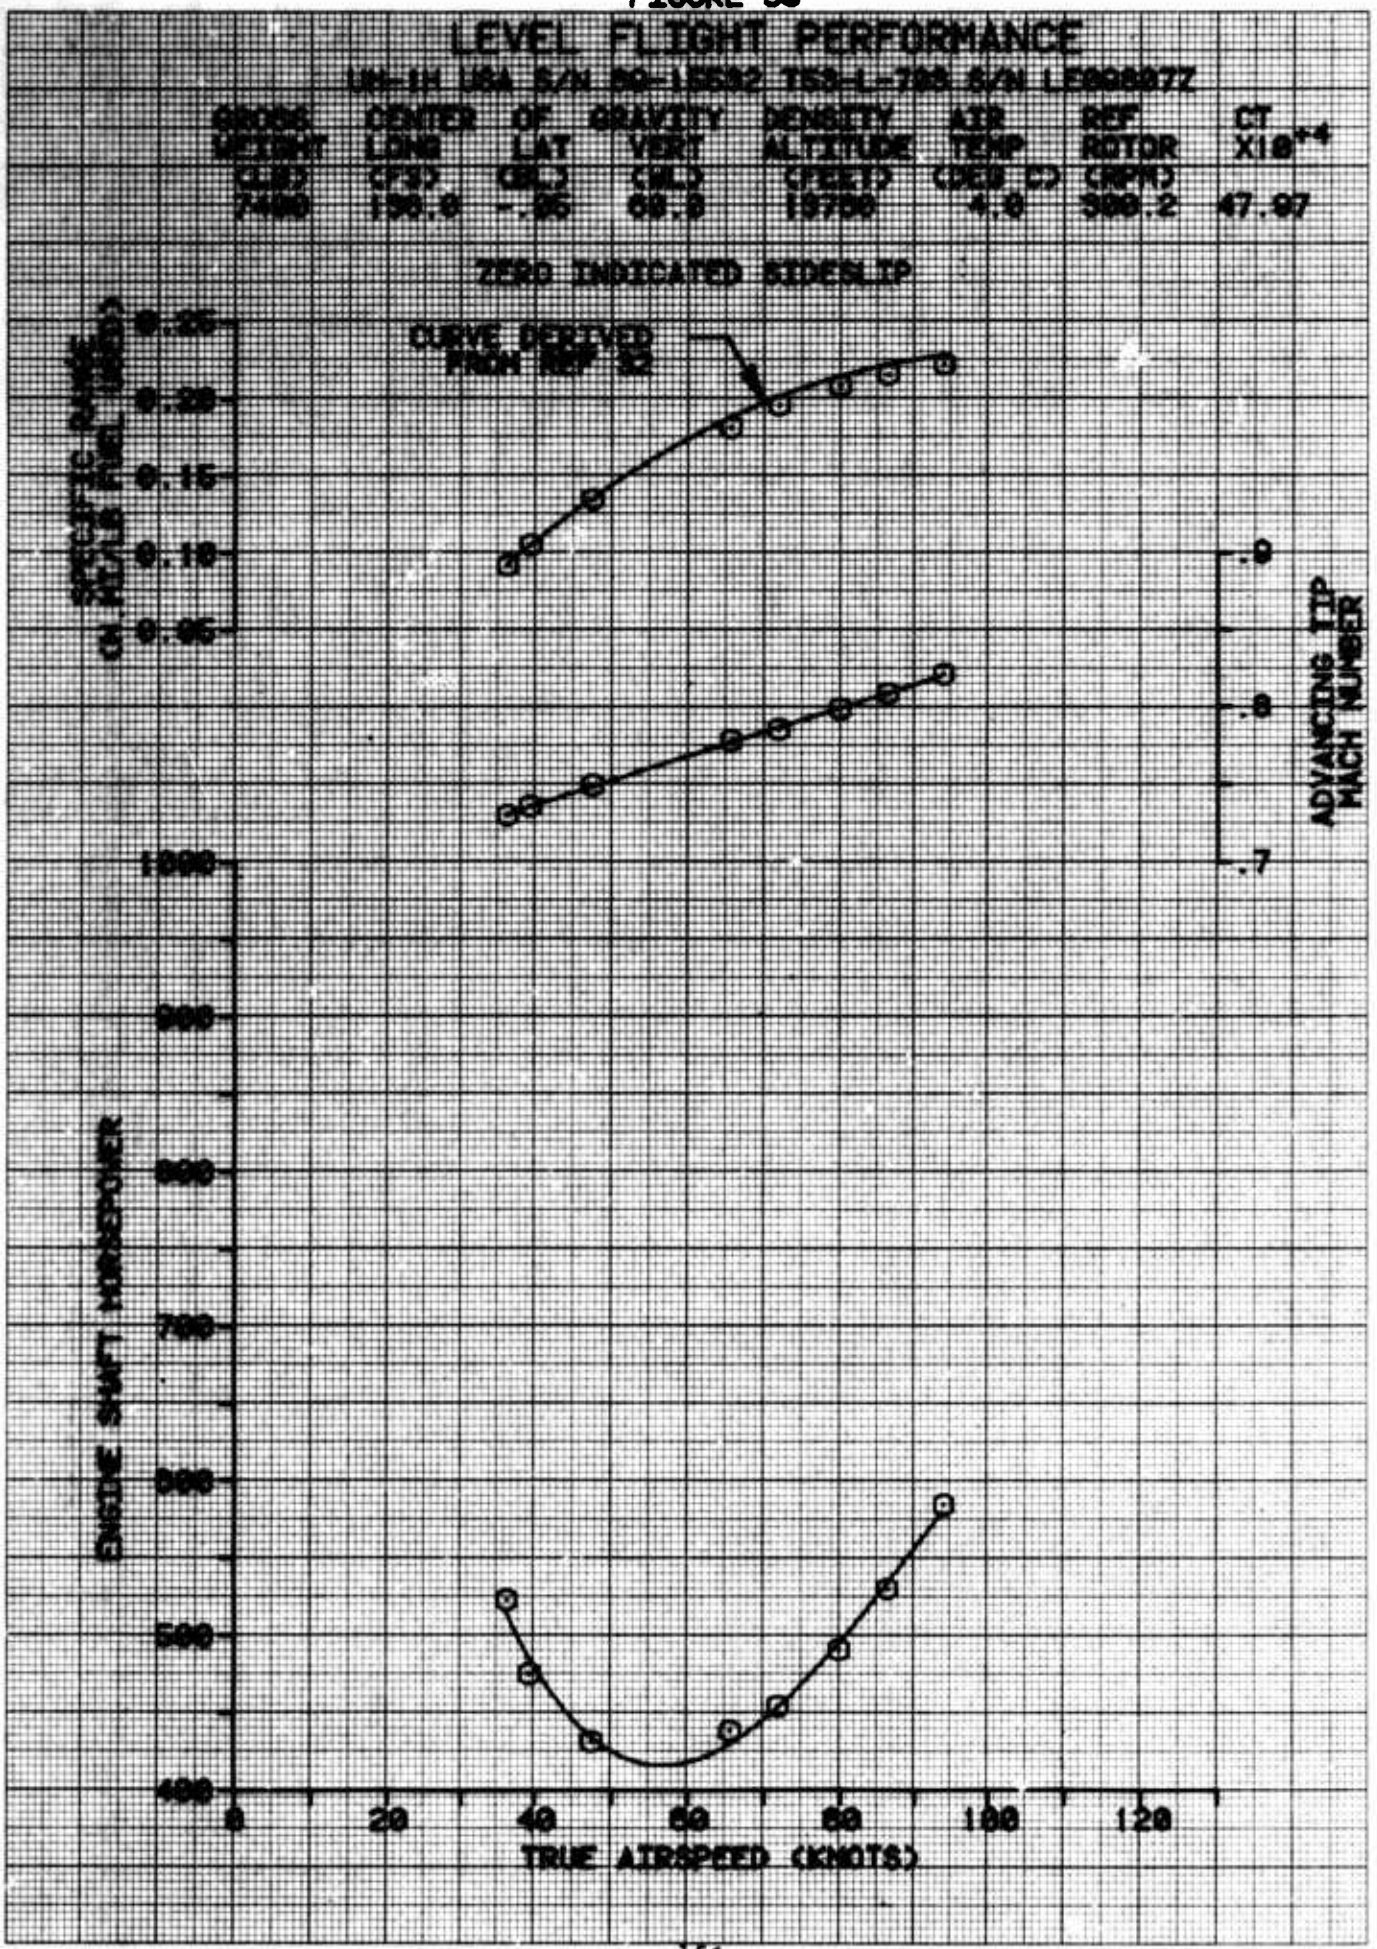

LEVEL FLIGHT PERFORMANCE
GROSS WEIGHT (LB)
CENTER OF GRAVITY LONG (FS)
LAT (BL)
VERT (BL)
DENSITY ALTITUDE (FEET)
AIR TEMP (DEG C)
REF ROTOR (RPM)
CT X10**4
7400
158.6
-.86
68.8
10750
4.0
380.2
47.97
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 12
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHP (EACH ENGINE)
TRUE AIRSPEED (KNOTS)
0
20
40
60
80
100
120

FIGURE 40

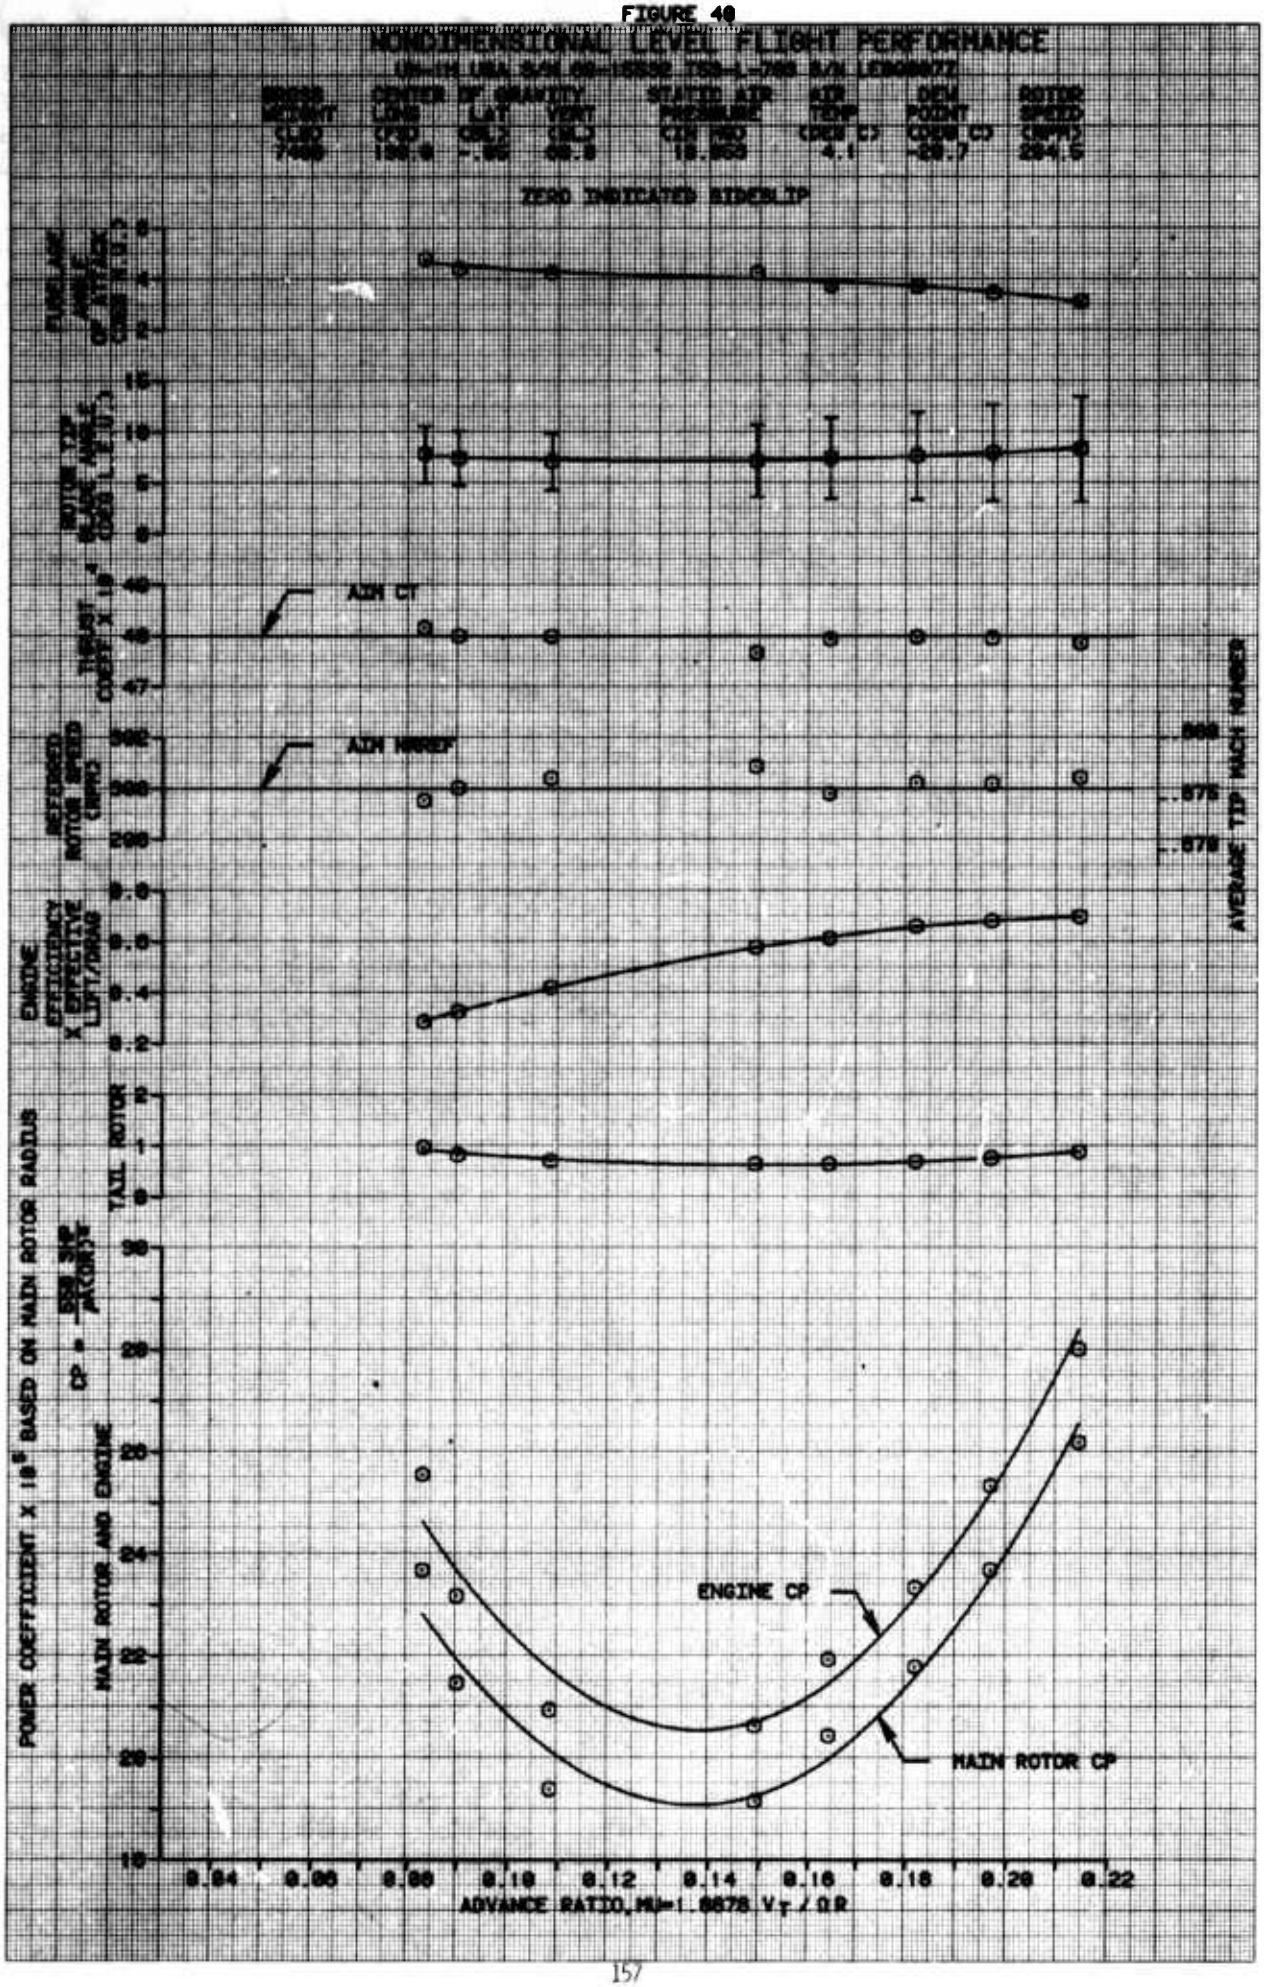

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN MREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
ADVANCE RATIO, MU=1.6678 V∞ / ΩR

FIGURE 41

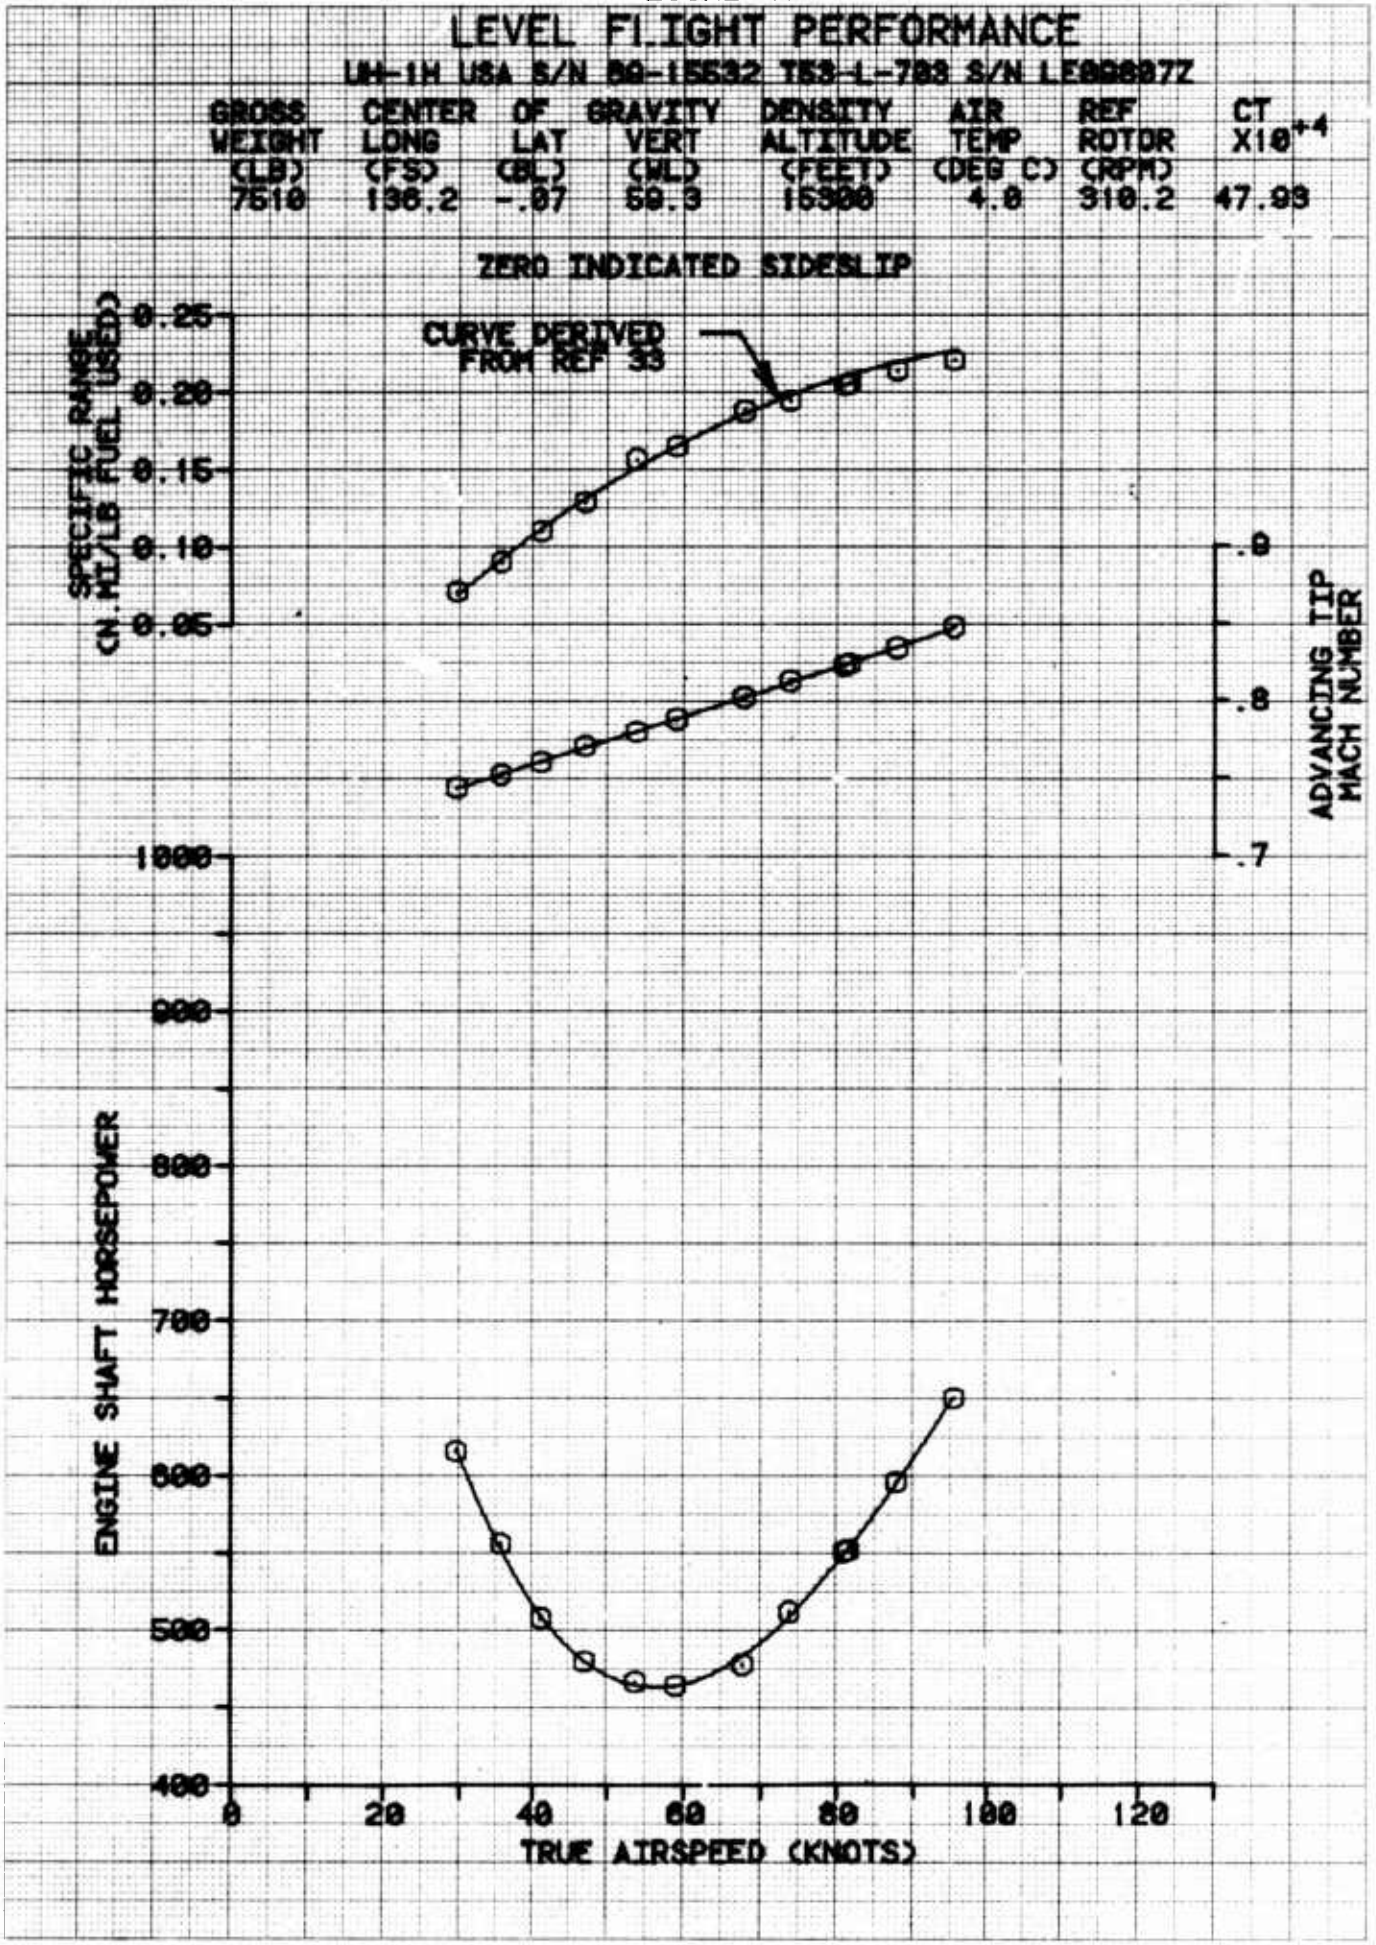

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 66-15532 T53-L-703 S/N LE606077
GROSS WEIGHT (LB) 7510
CENTER OF GRAVITY LONG (FS) 136.2
LAT (BL) -.07
VERT (WL) 59.3
DENSITY ALTITUDE (FEET) 15300
AIR TEMP (DEG C) 4.0
REF ROTOR (RPM) 310.2
CT X10**+4 47.93
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 33
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 42

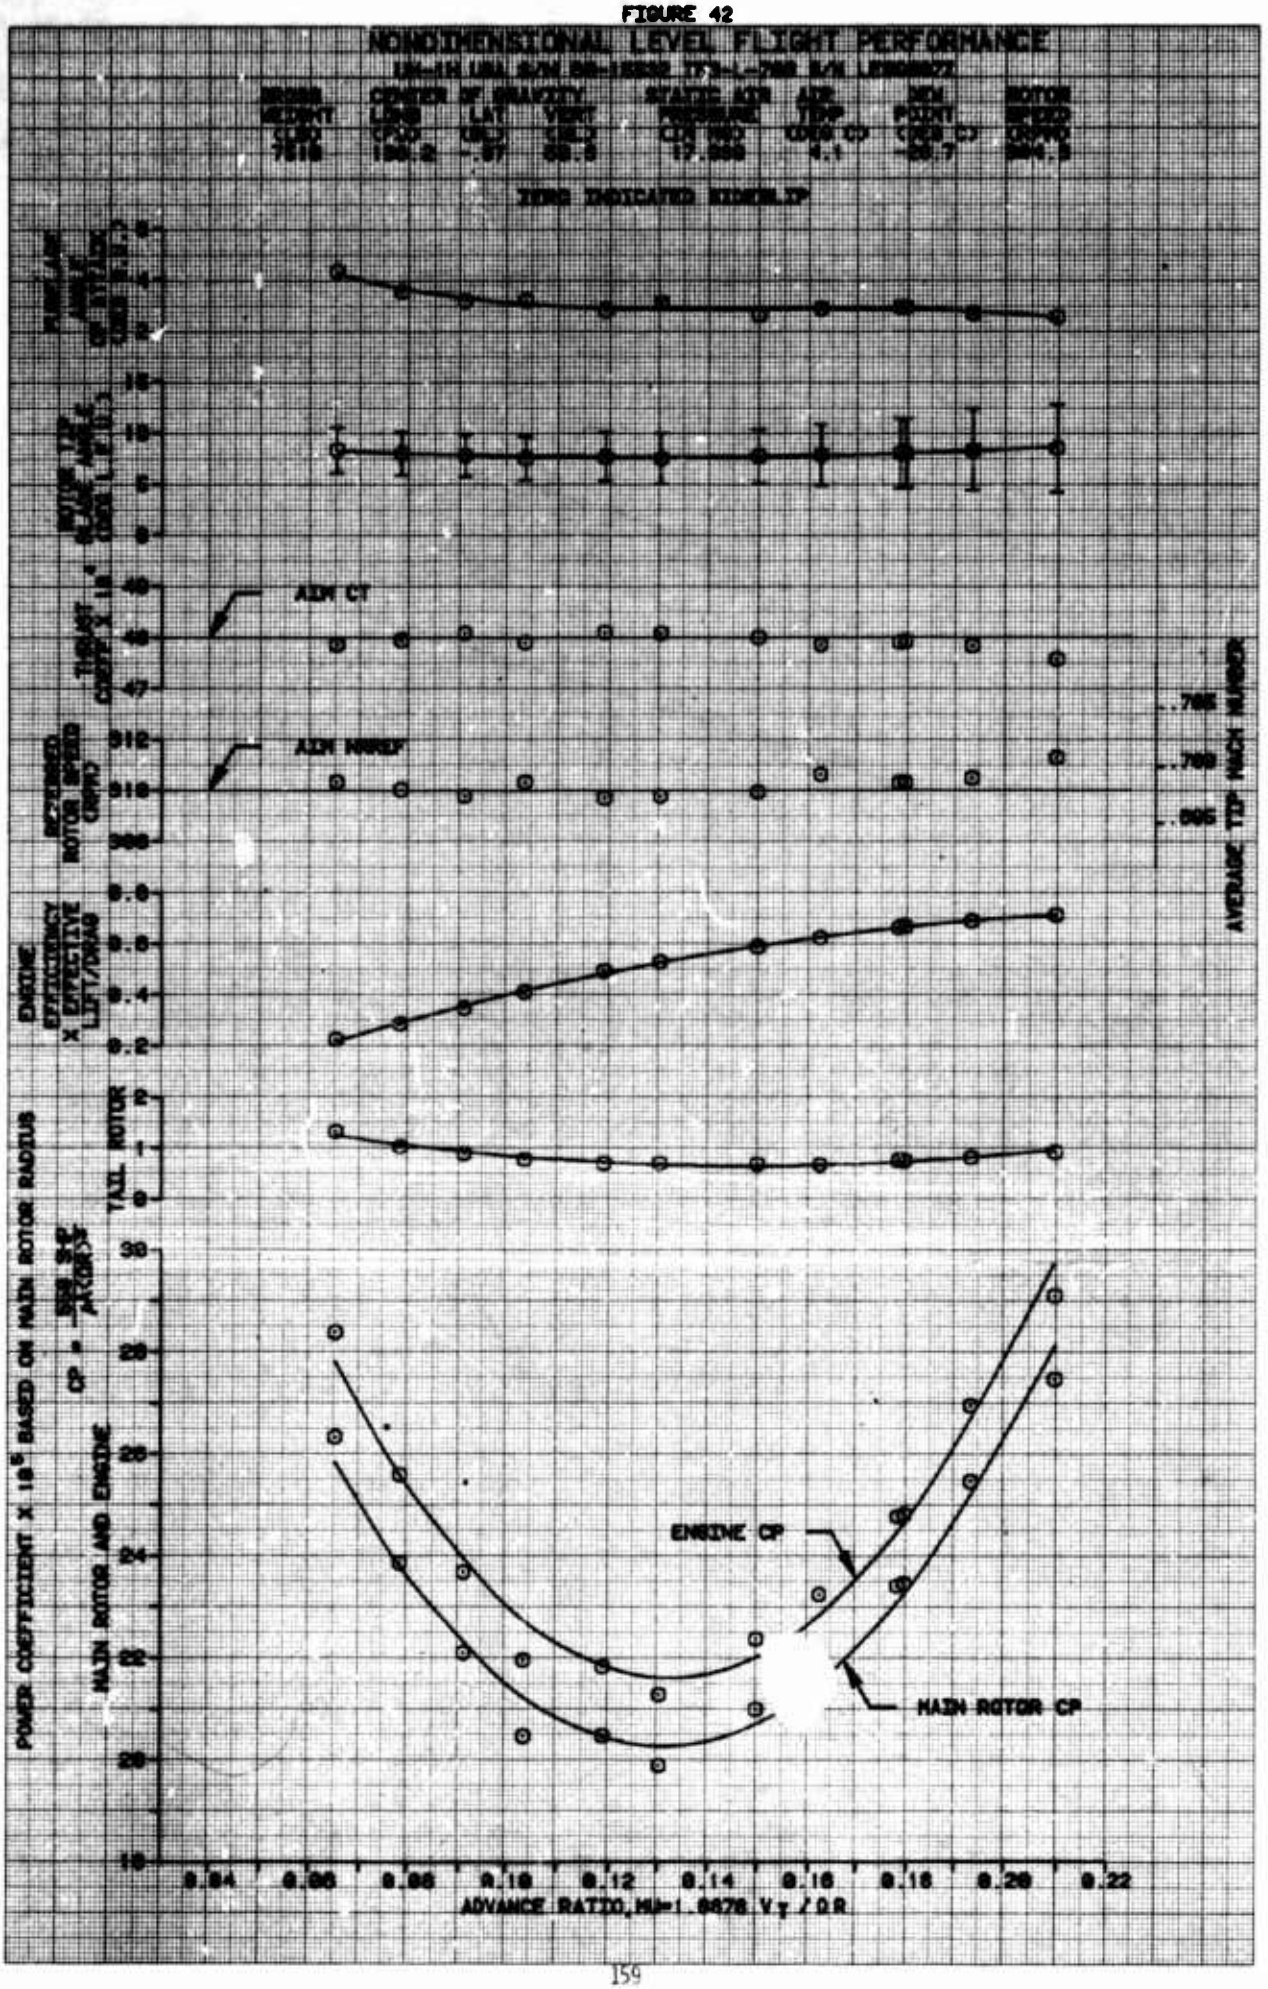

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ADVANCE RATIO, MU=1.0678 Vt / Q R
POWER COEFFICIENT X 10^5 BASED ON MAIN ROTOR RADIUS
MAIN ROTOR AND ENGINE
TAIL ROTOR
ENGINE CP
MAIN ROTOR CP
AIM CT
AIM RMRSP
AVERAGE TIP MACH NUMBER

FIGURE 43

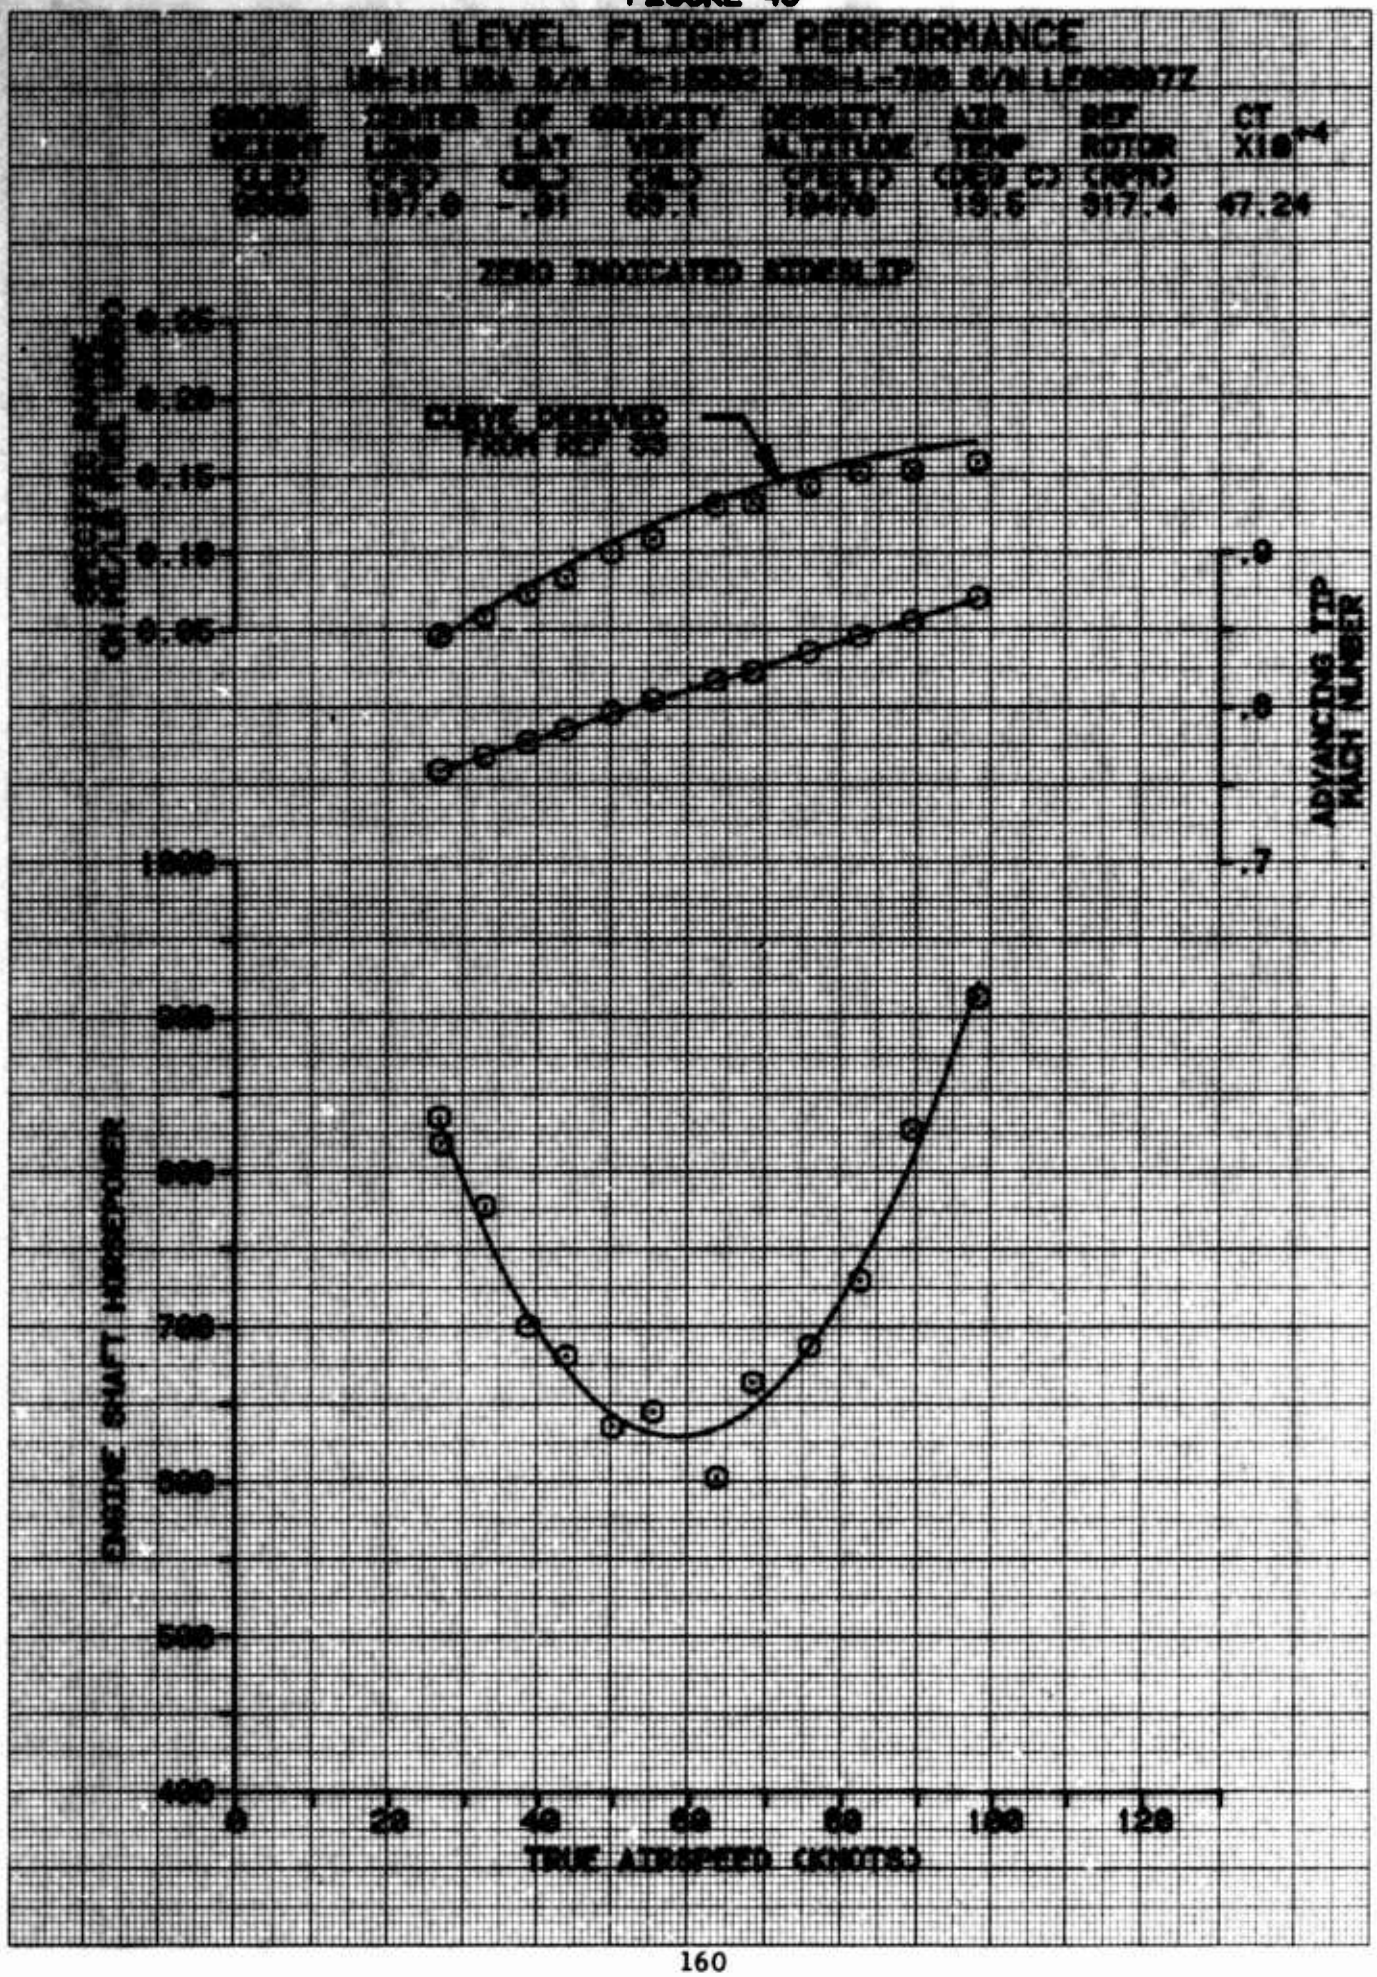

LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
ADVANCING TIP MACH NUMBER
TRUE AIRSPEED (KNOTS)

FIGURE 44

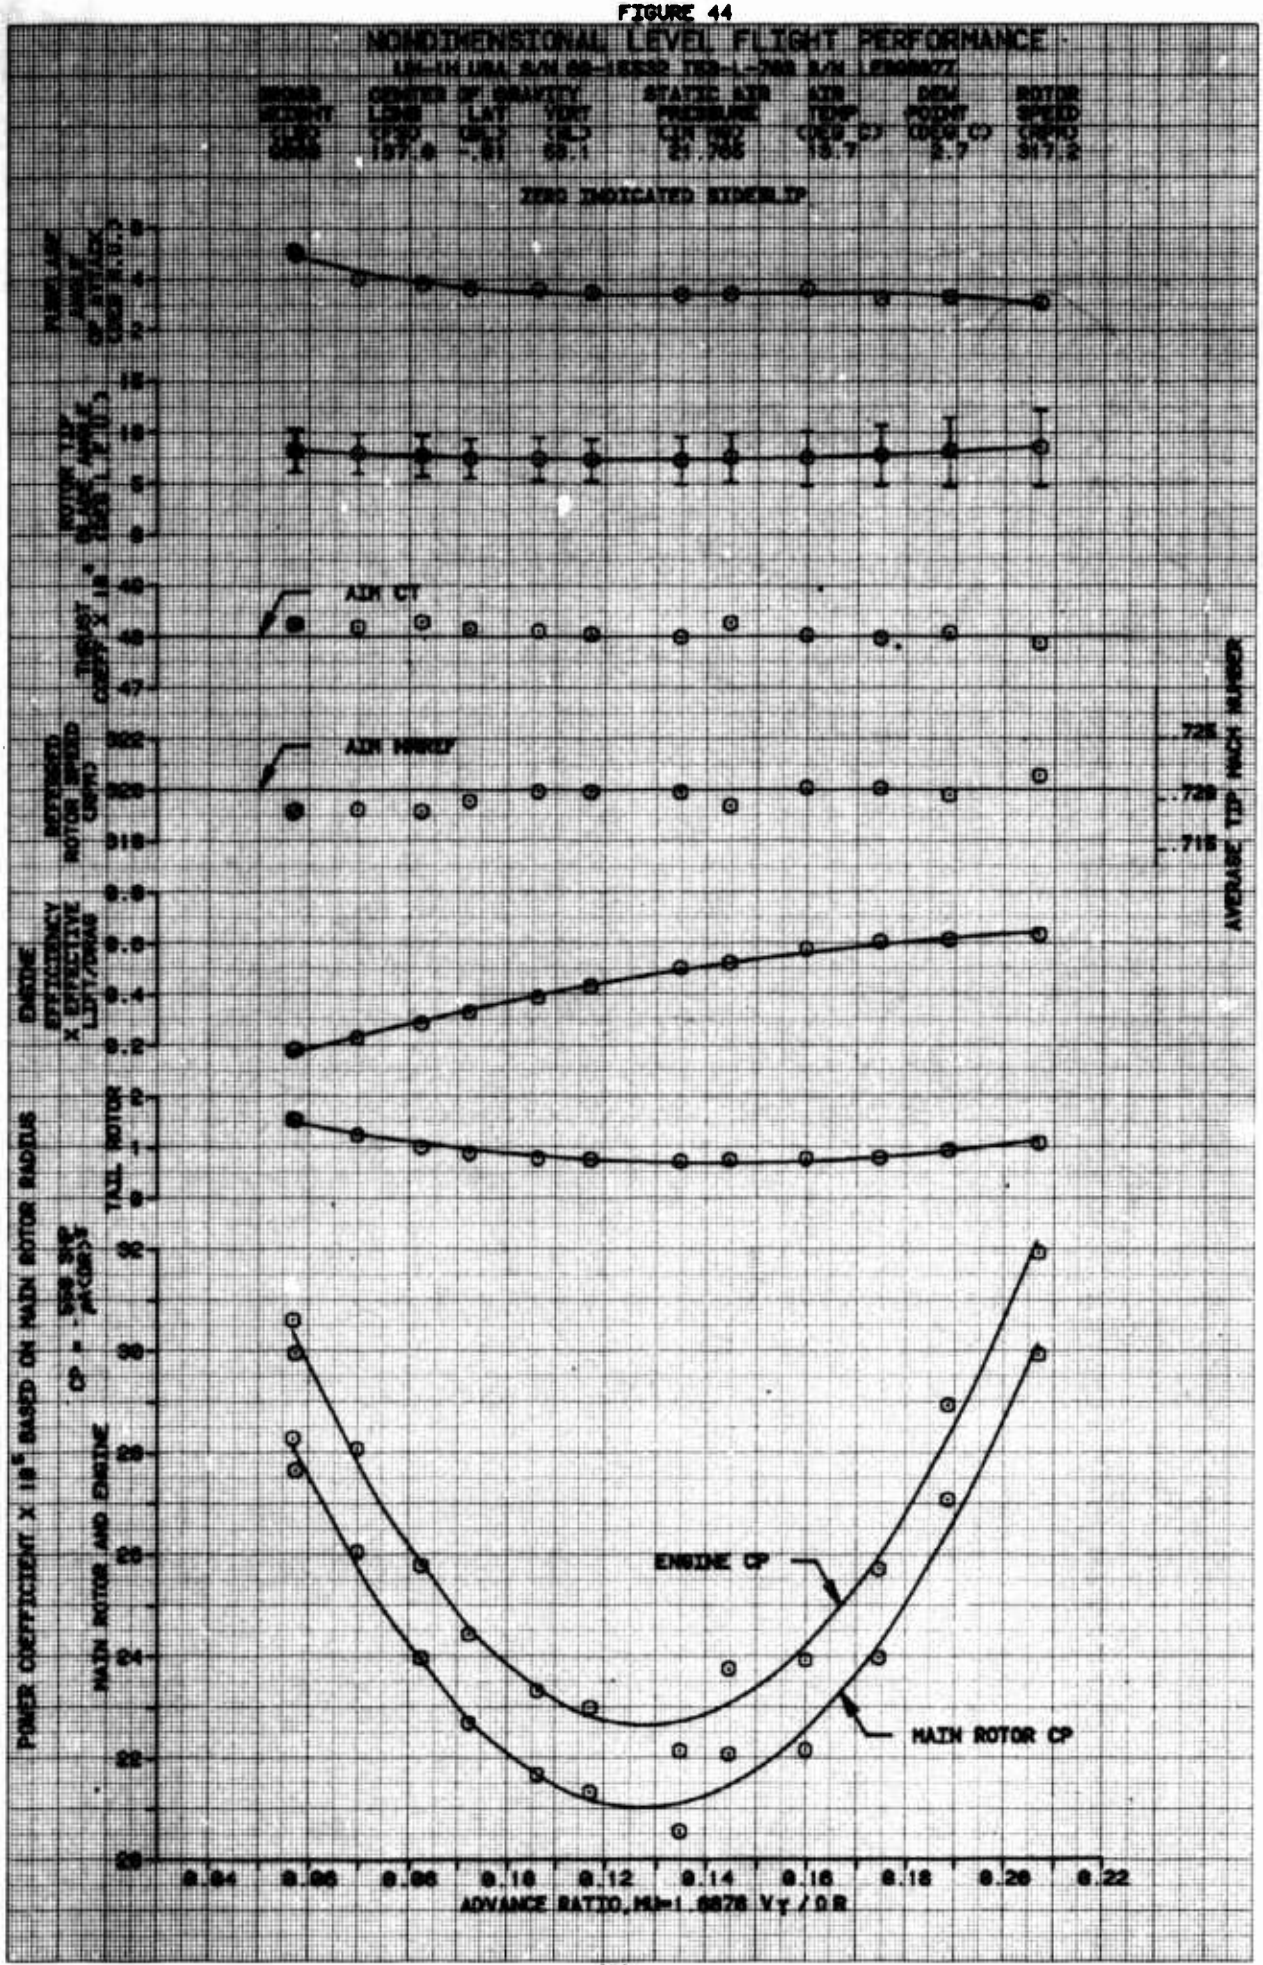

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIR CT
AIR MINUS
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
POWER COEFFICIENT X 10^5 BASED ON MAIN ROTOR RADIUS
ADVANCE RATIO, MU=1.6878 VT / Ω R

FIGURE 45

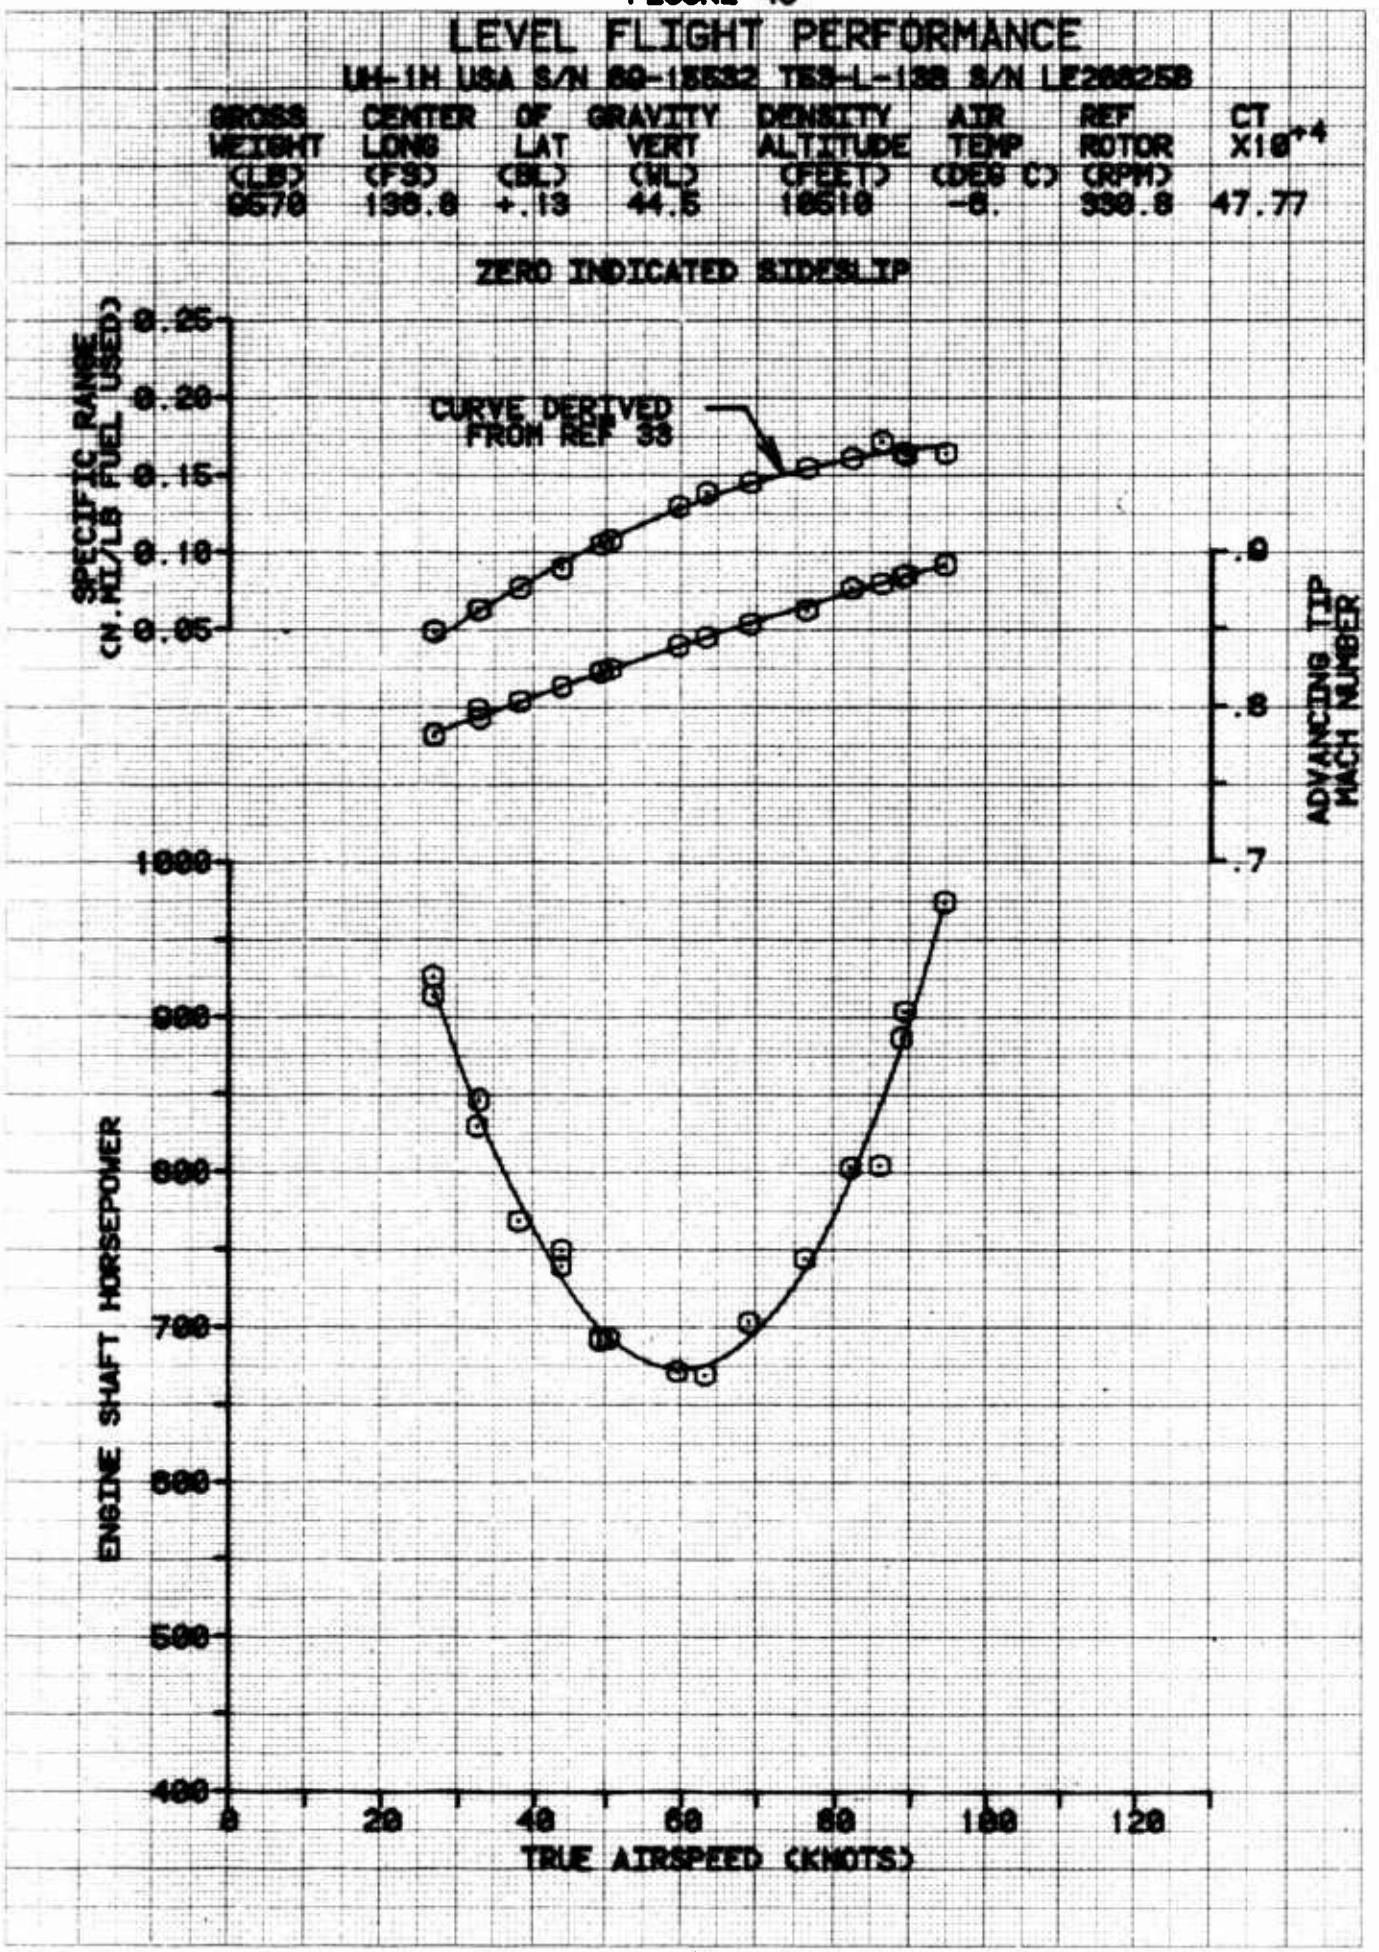

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15532 T53-L-13B S/N LE26825B
GROSS WEIGHT (LB) 9570
CENTER OF GRAVITY LONG (FS) 136.8
LAT (BL) +.13
VERT (WL) 44.5
DENSITY ALTITUDE (FEET) 10510
AIR TEMP (DEG C) -8.
REF ROTOR (RPM) 338.8
CT X10**4 47.77
ZERO INDICATED SIDESLIP
SPECIFIC RANGE CN.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
CURVE DERIVED FROM REF 33
.9
.8
.7
ADVANCING TIP MACH NUMBER
ENGINE SHAFT HORSEPOWER
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 48

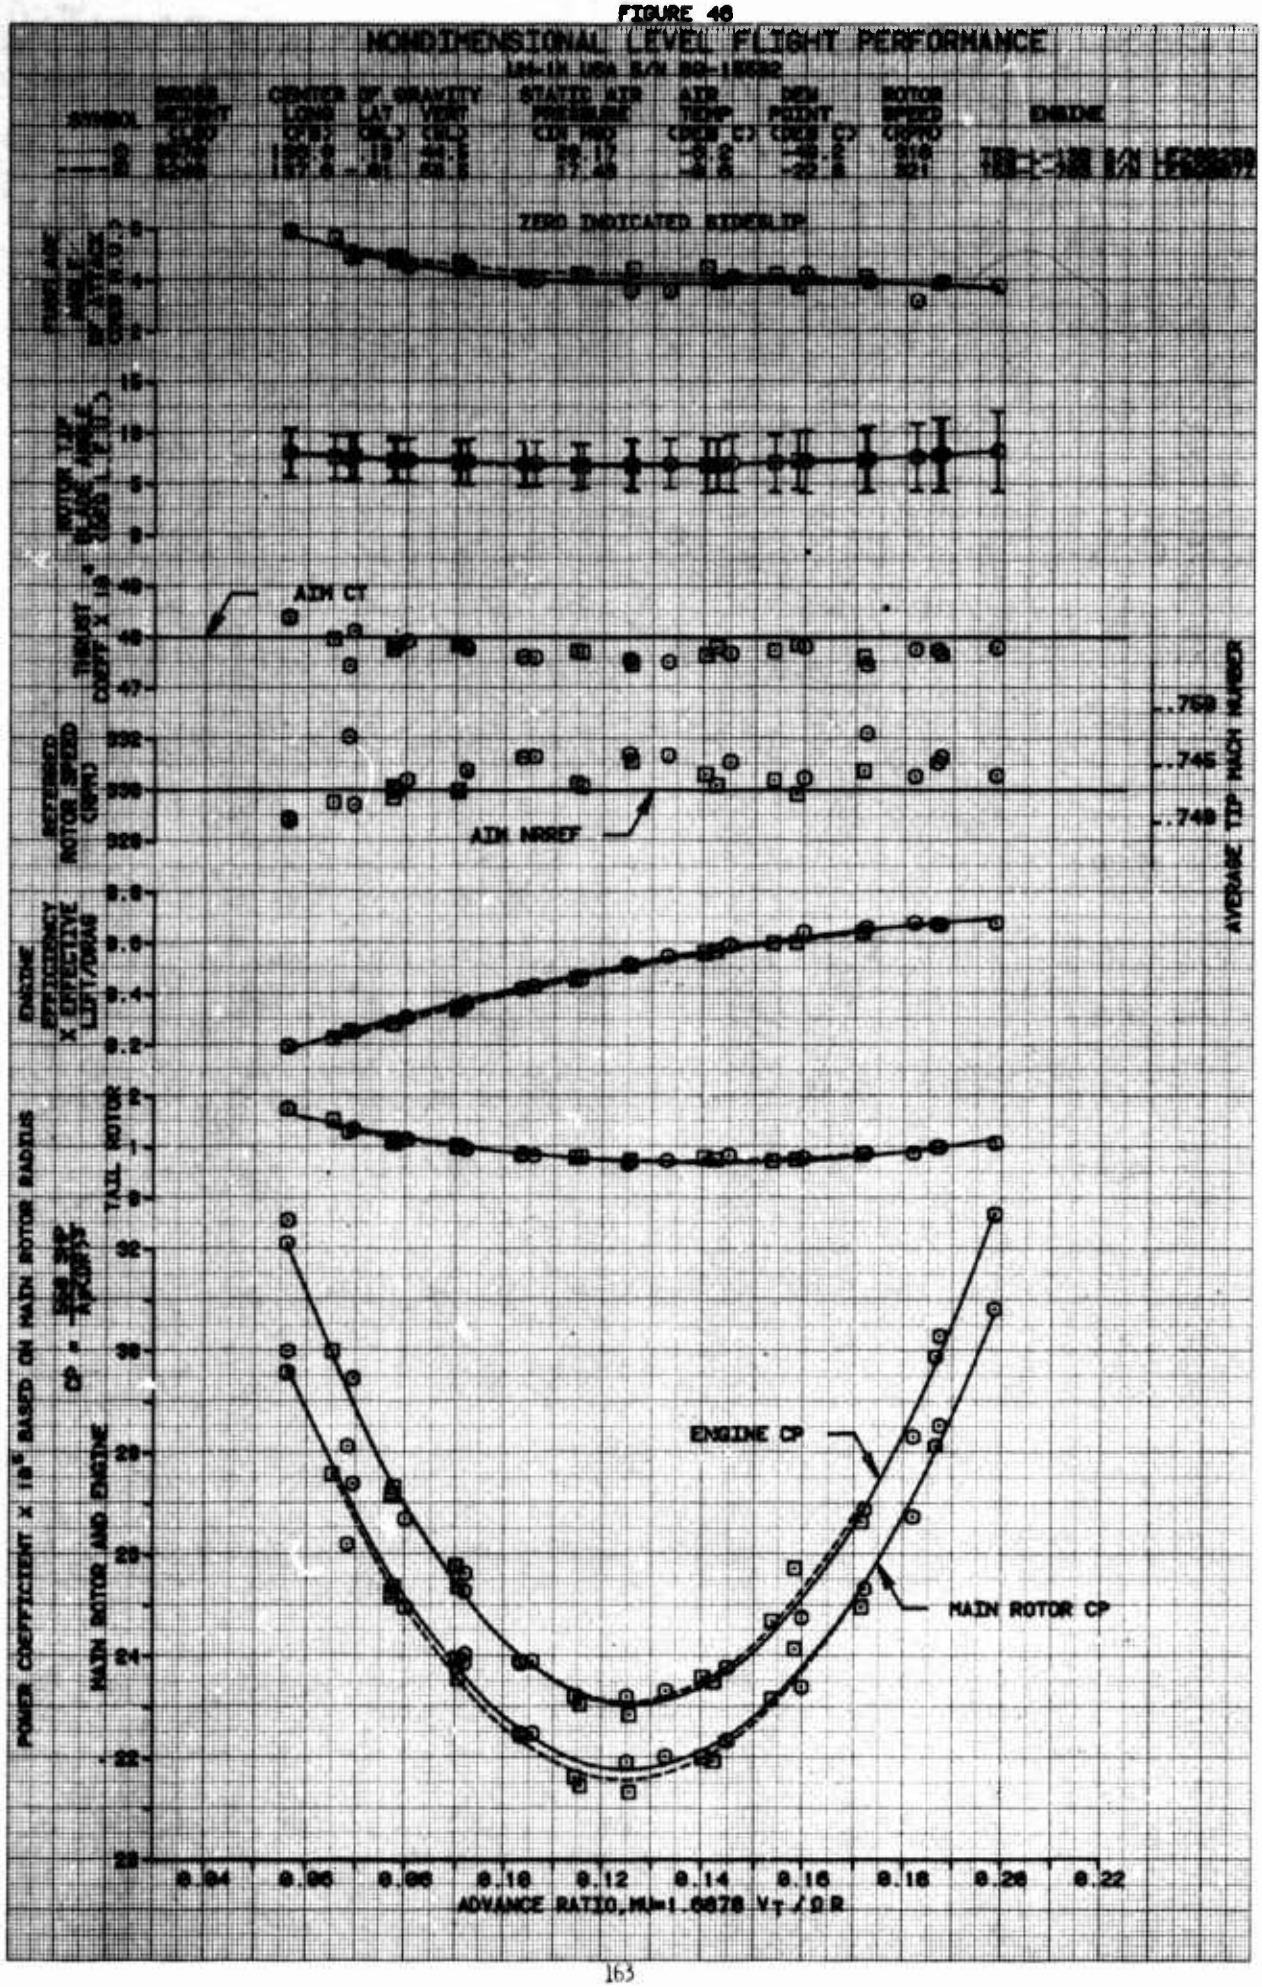

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED RUDDER TRIM
AIM CT
AIM NRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
.759
.745
.749
ADVANCE RATIO, MU=1.6878 V∞ / ΩR
0.04
0.06
0.08
0.10
0.12
0.14
0.16
0.18
0.20
0.22

FIGURE 47

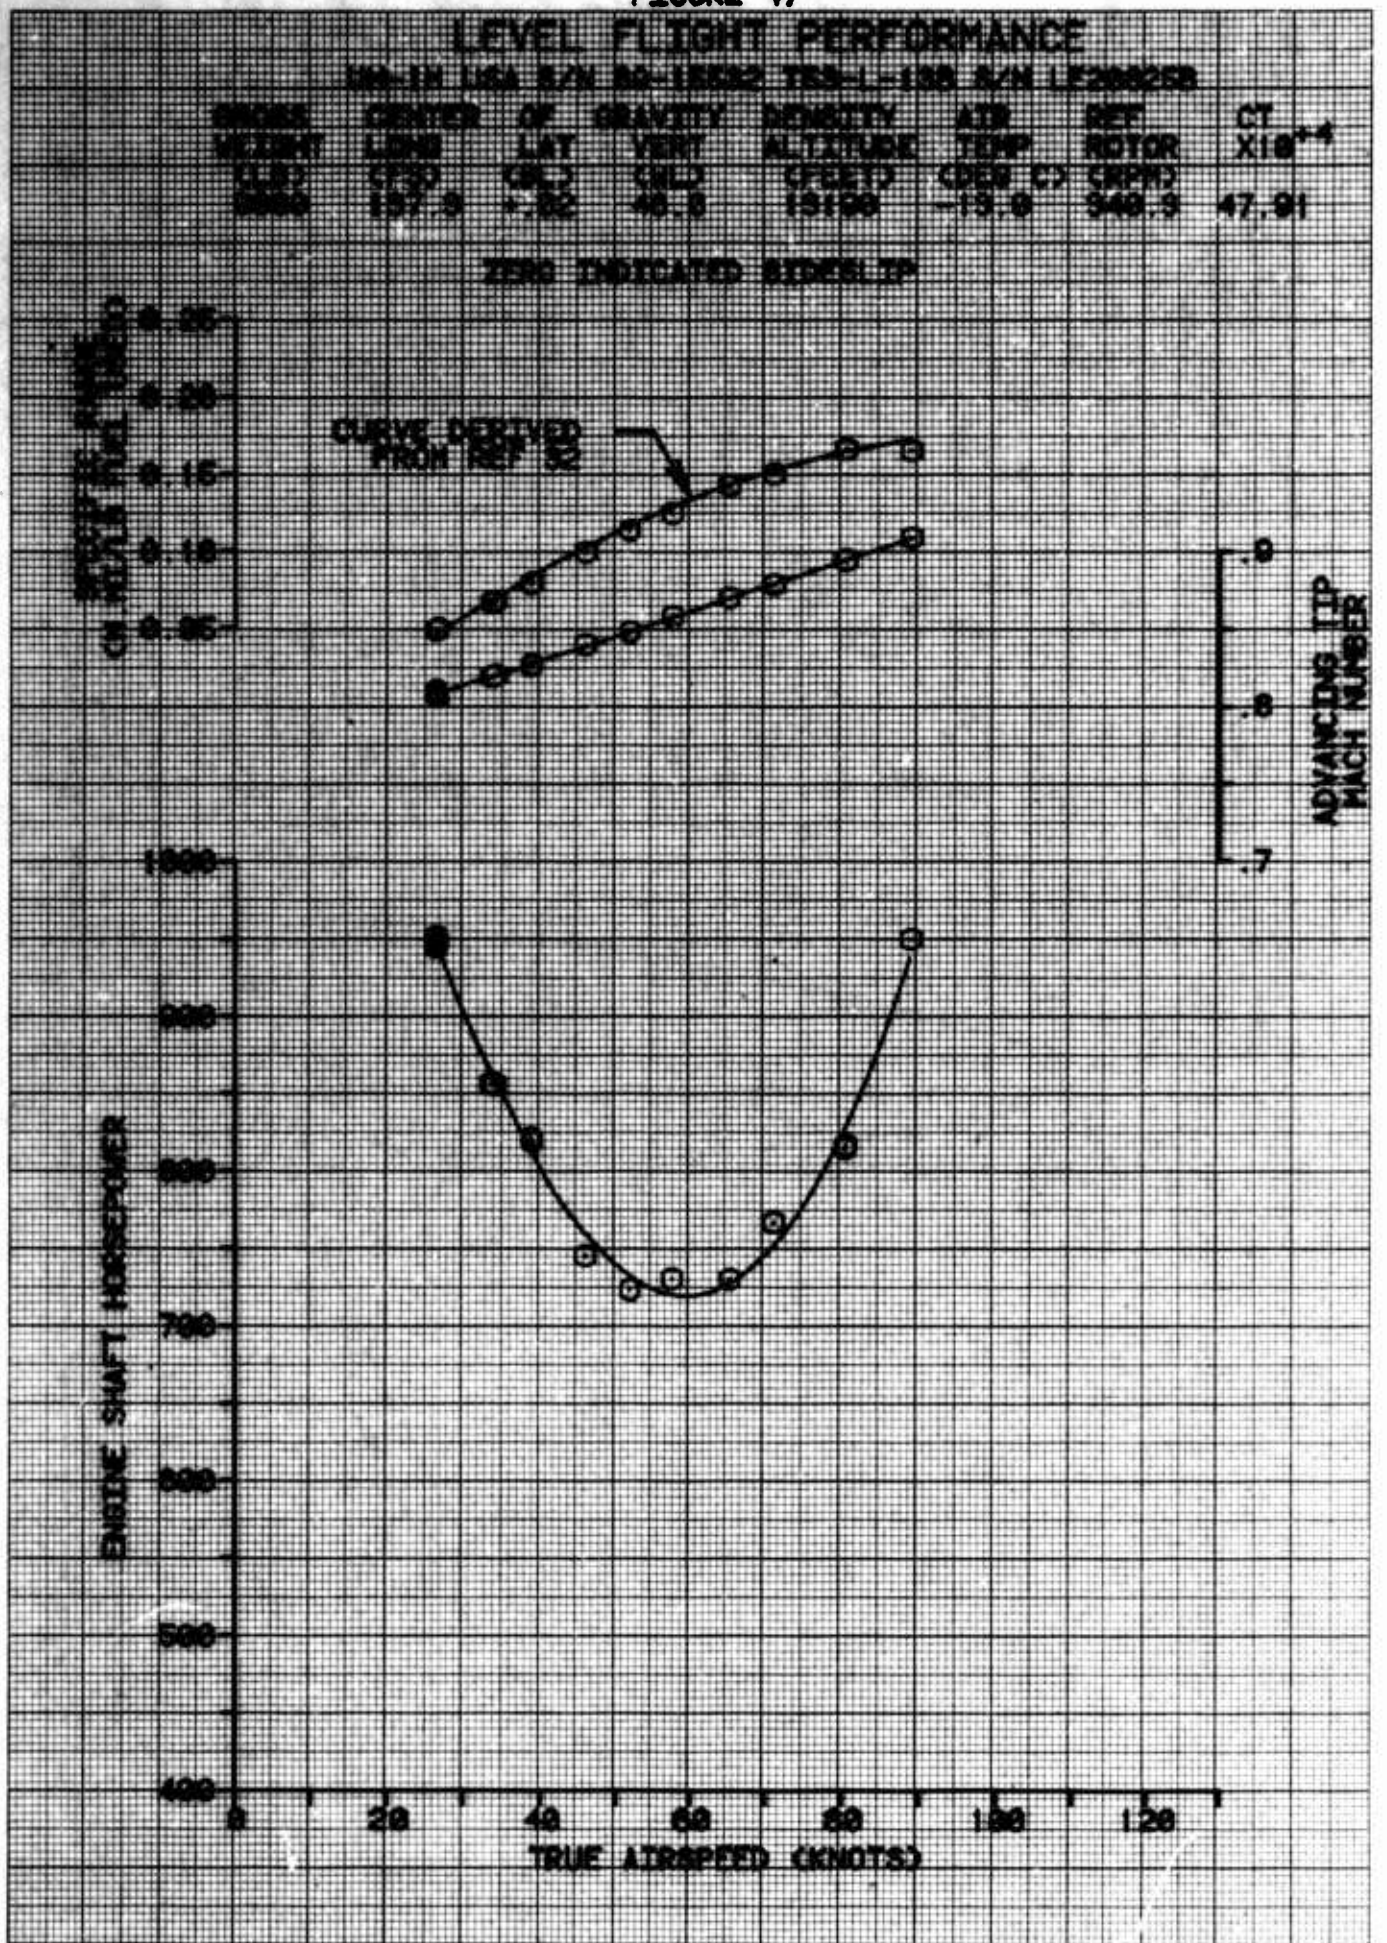

LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 32
ADVANCING TIP MACH NUMBER
.9
.8
.7
ENGINE SHAFT HORSEPOWER
TRUE AIRSPEED (KNOTS)
0
20
40
60
80
100
120

FIGURE 48

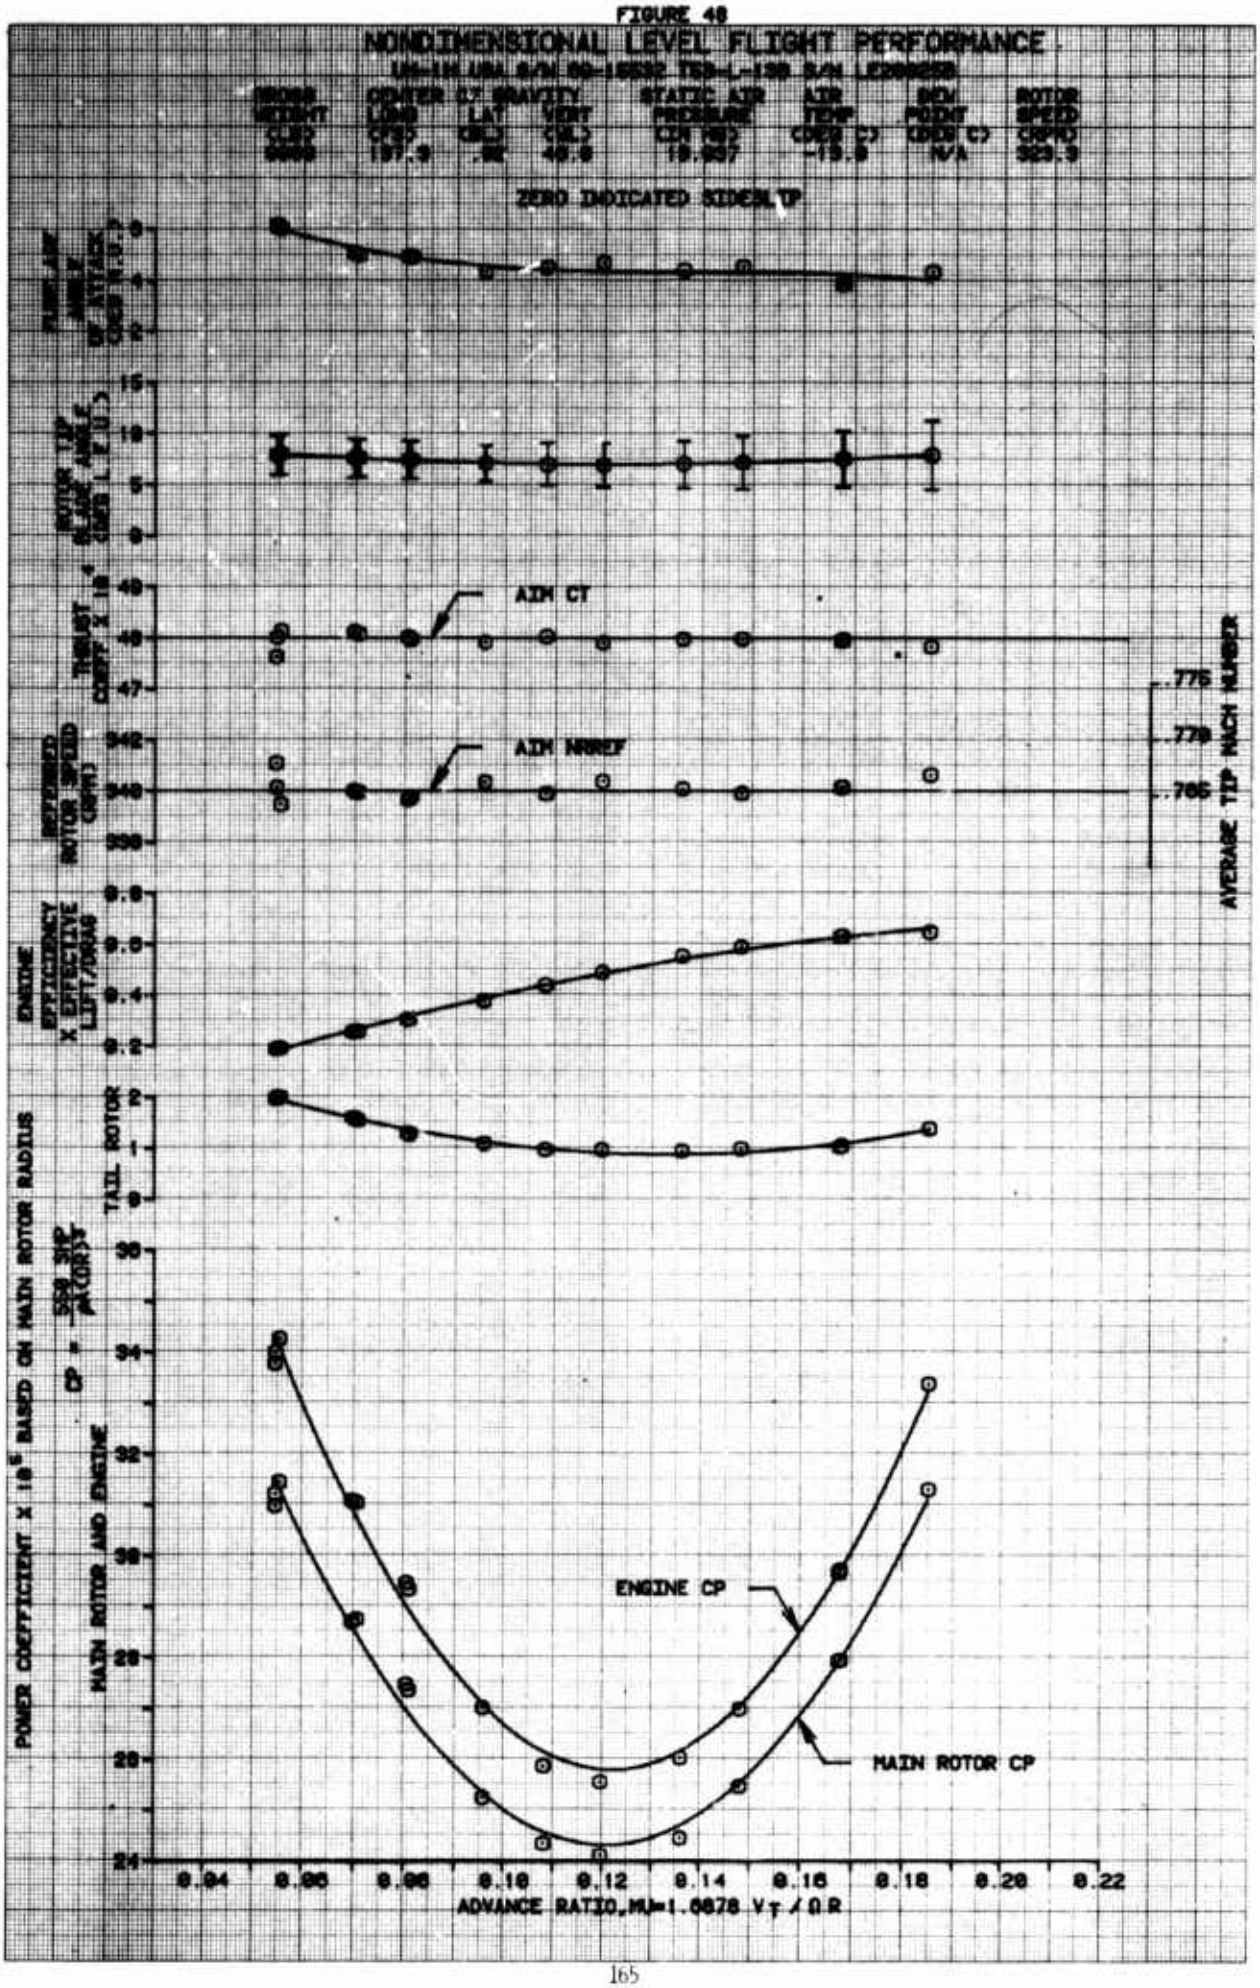

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIM CT
AIM NRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
.776
.770
.766
POWER COEFFICIENT X 10^6 BASED ON MAIN ROTOR RADIUS
MAIN ROTOR AND ENGINE
TAIL ROTOR
ADVANCE RATIO, MU=1.0678 VT / ΩR
0.04
0.06
0.08
0.10
0.12
0.14
0.16
0.18
0.20
0.22

FIGURE 40

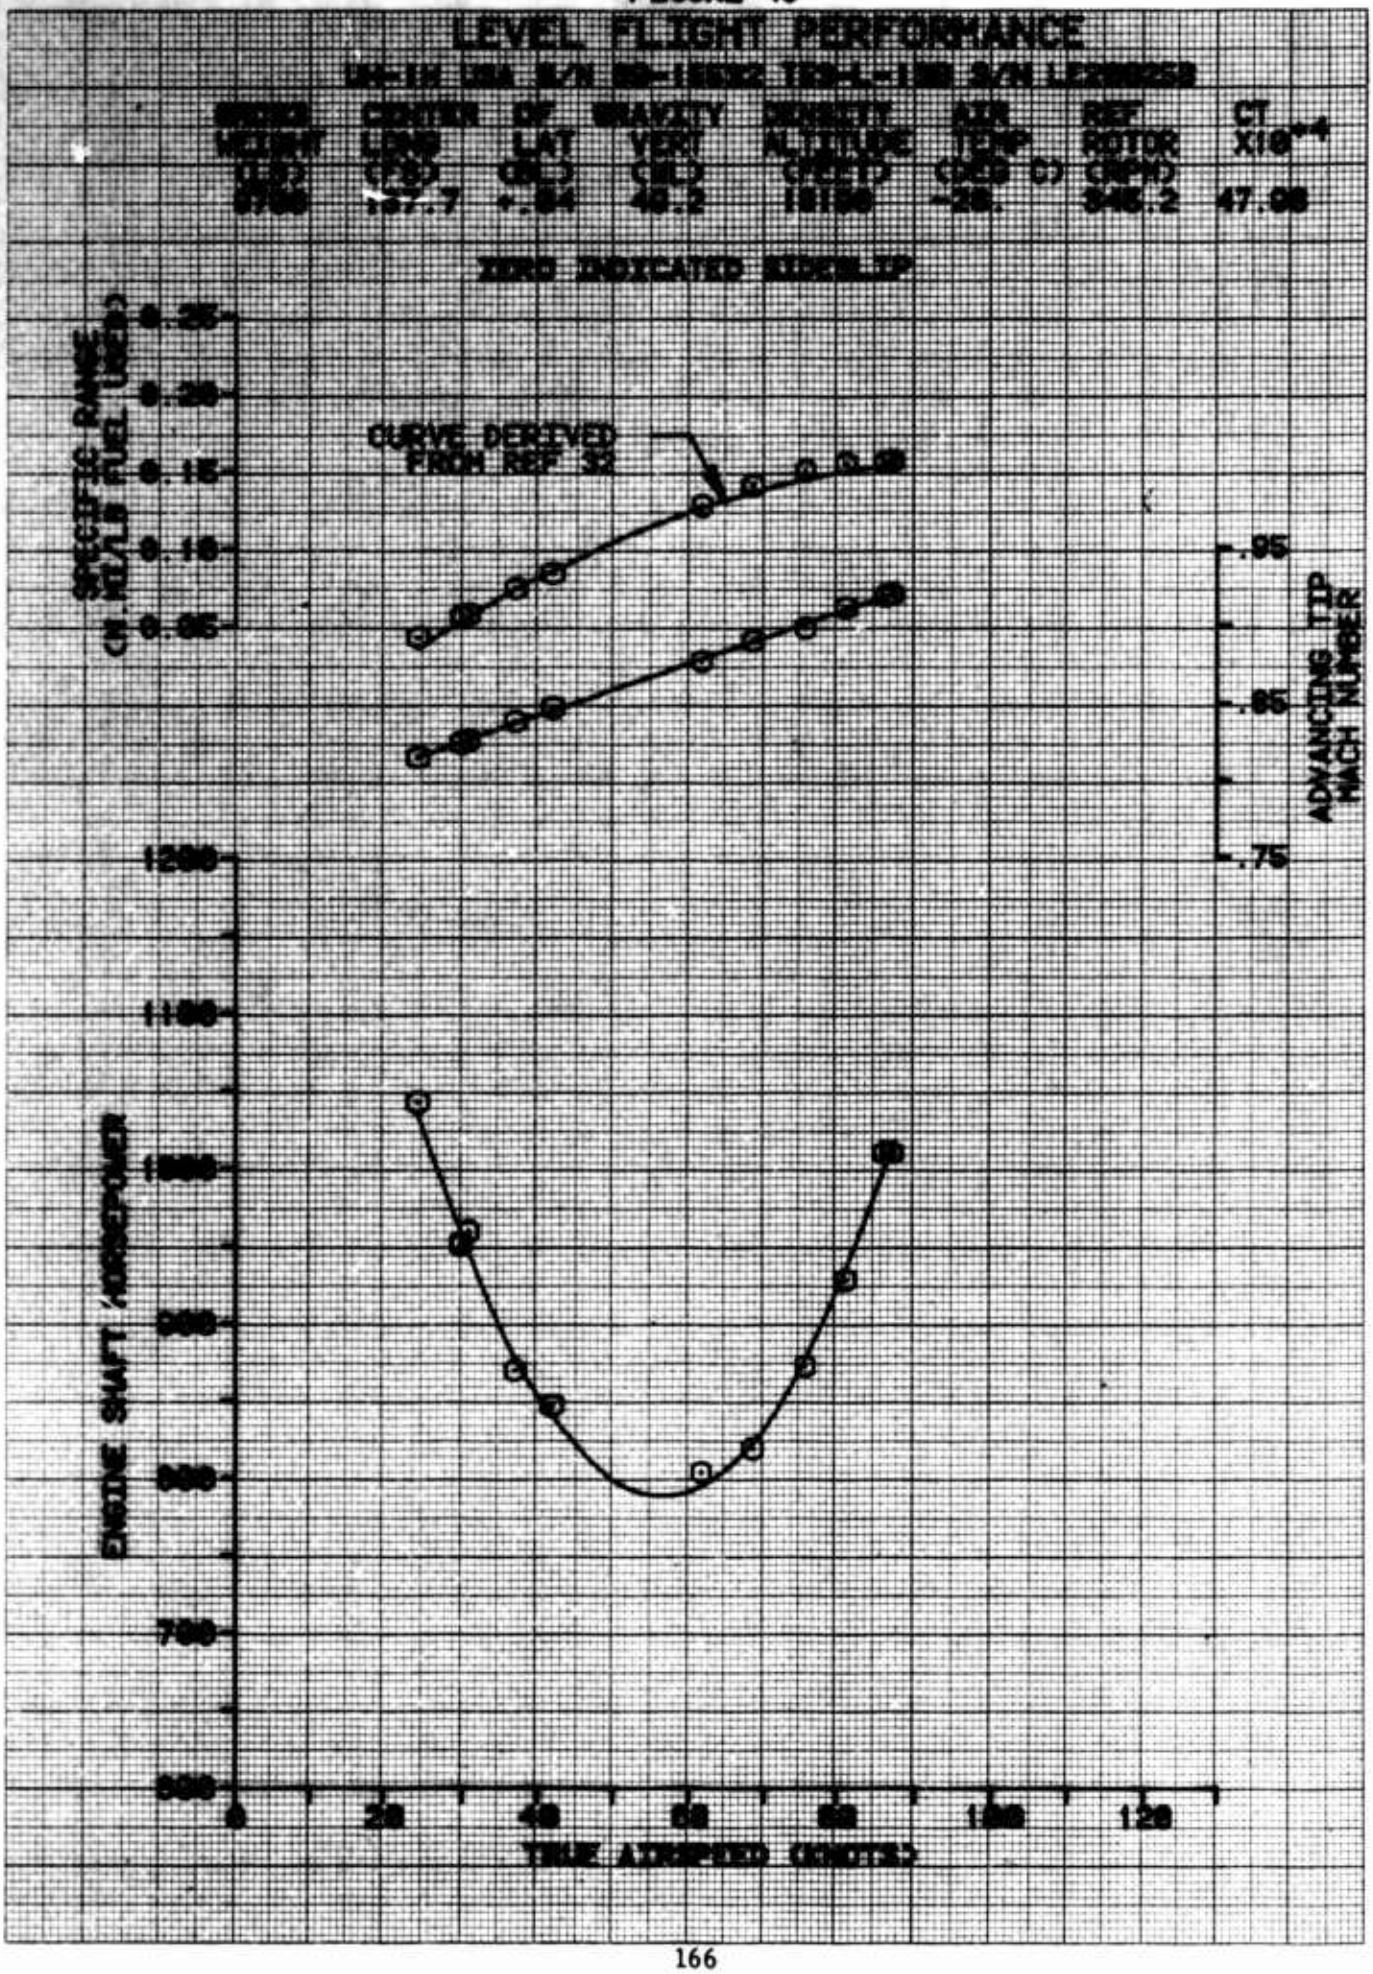

LEVEL FLIGHT PERFORMANCE
CENTER OF GRAVITY
LONG
LAT
VERT
PRESSURE ALTITUDE
AIR TEMP
REF ROTOR
CT X10**-4
47.96
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 32
SPECIFIC RANGE (NAUT MILES/LB FUEL USED)
ENGINE SHAFT HORSEPOWER
ADVANCING TIP MACH NUMBER
.95
.85
.75
TRUE AIRSPEED (KNOTS)

FIGURE 59

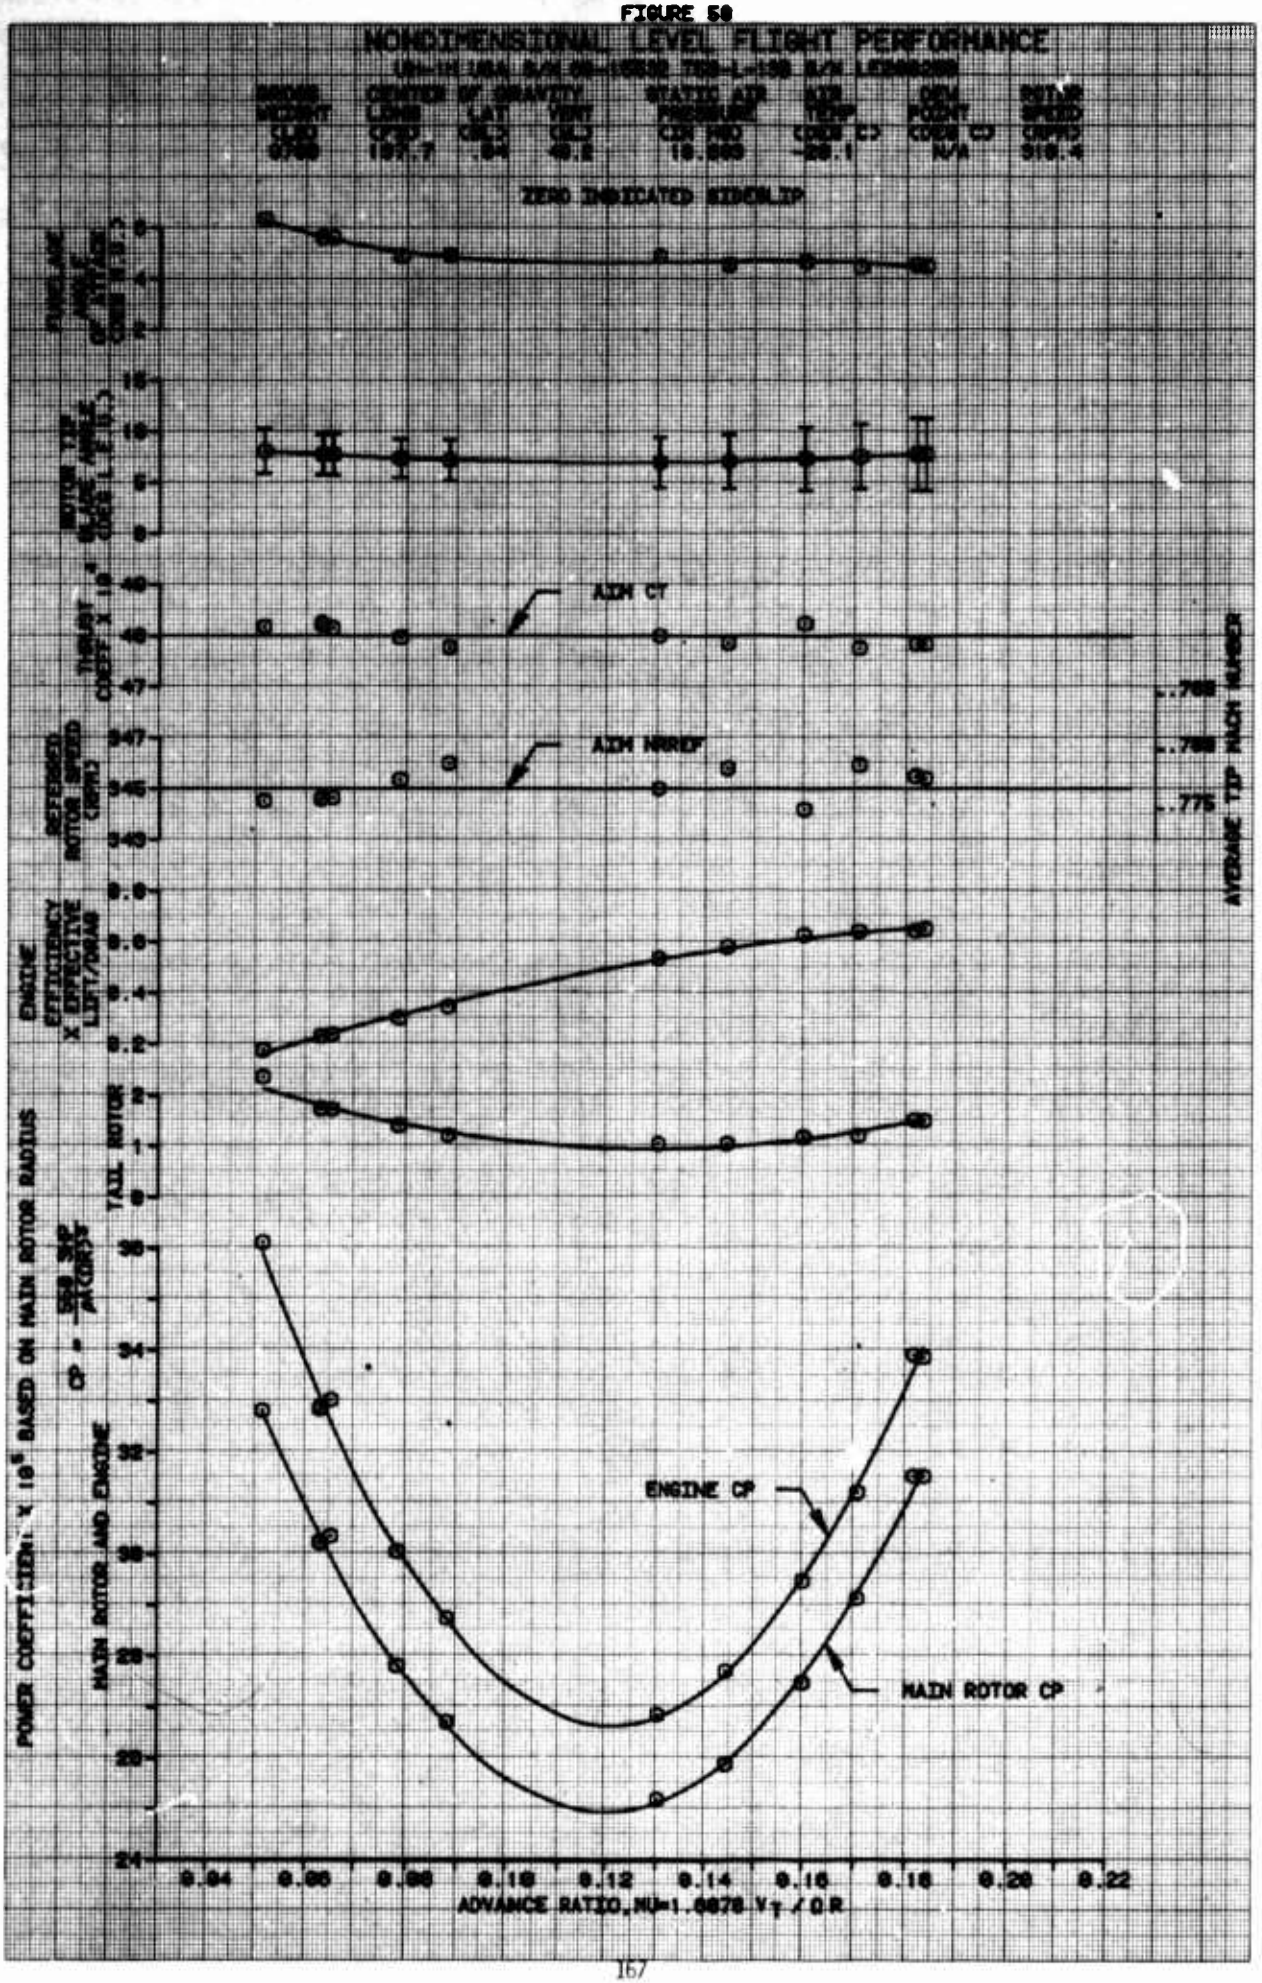

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIM CT
AIM MRRDF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
ADVANCE RATIO, MU=1.6878 V_T / Q.R

FIGURE 51

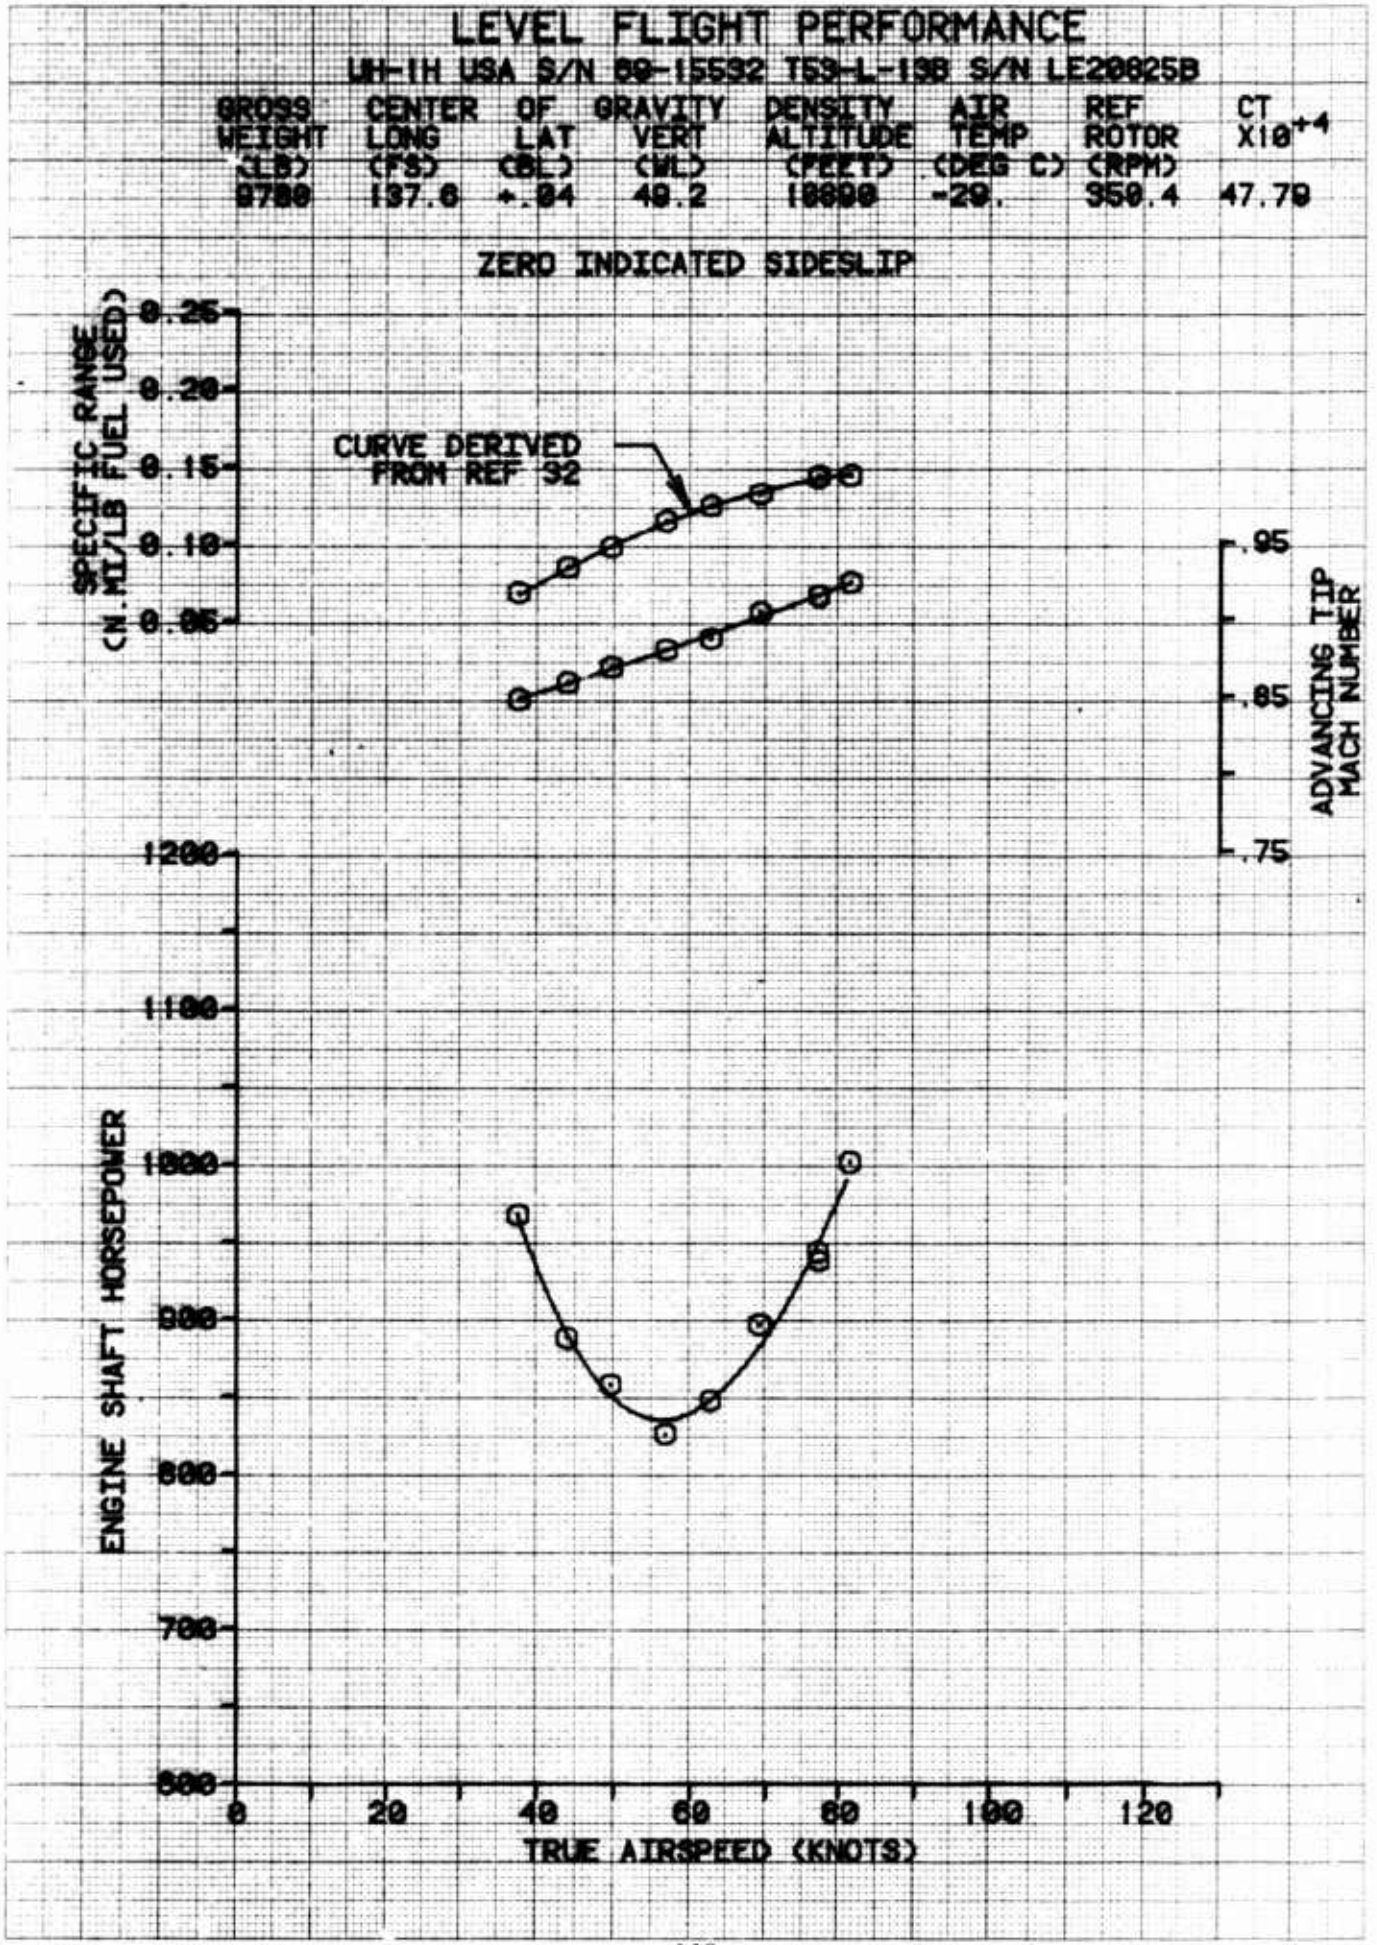

LEVEL FLIGHT PERFORMANCE
UH-1H USA S/N 69-15592 T53-L-13B S/N LE20825B
GROSS WEIGHT (LB) 9700
CENTER OF GRAVITY LONG (FS) 137.6
LAT (BL) +.04
VERT (WL) 49.2
DENSITY ALTITUDE (FEET) 10000
AIR TEMP (DEG C) -20.
REF ROTOR (RPM) 350.4
CT X10+4 47.79
ZERO INDICATED SIDESLIP
SPECIFIC RANGE (N.MI/LB FUEL USED)
0.25
0.20
0.15
0.10
0.05
CURVE DERIVED FROM REF 32
.95
.85
.75
ADVANCING TIP MACH NUMBER
ENGINE SHAFT HORSEPOWER
1200
1100
1000
900
800
700
600
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 52

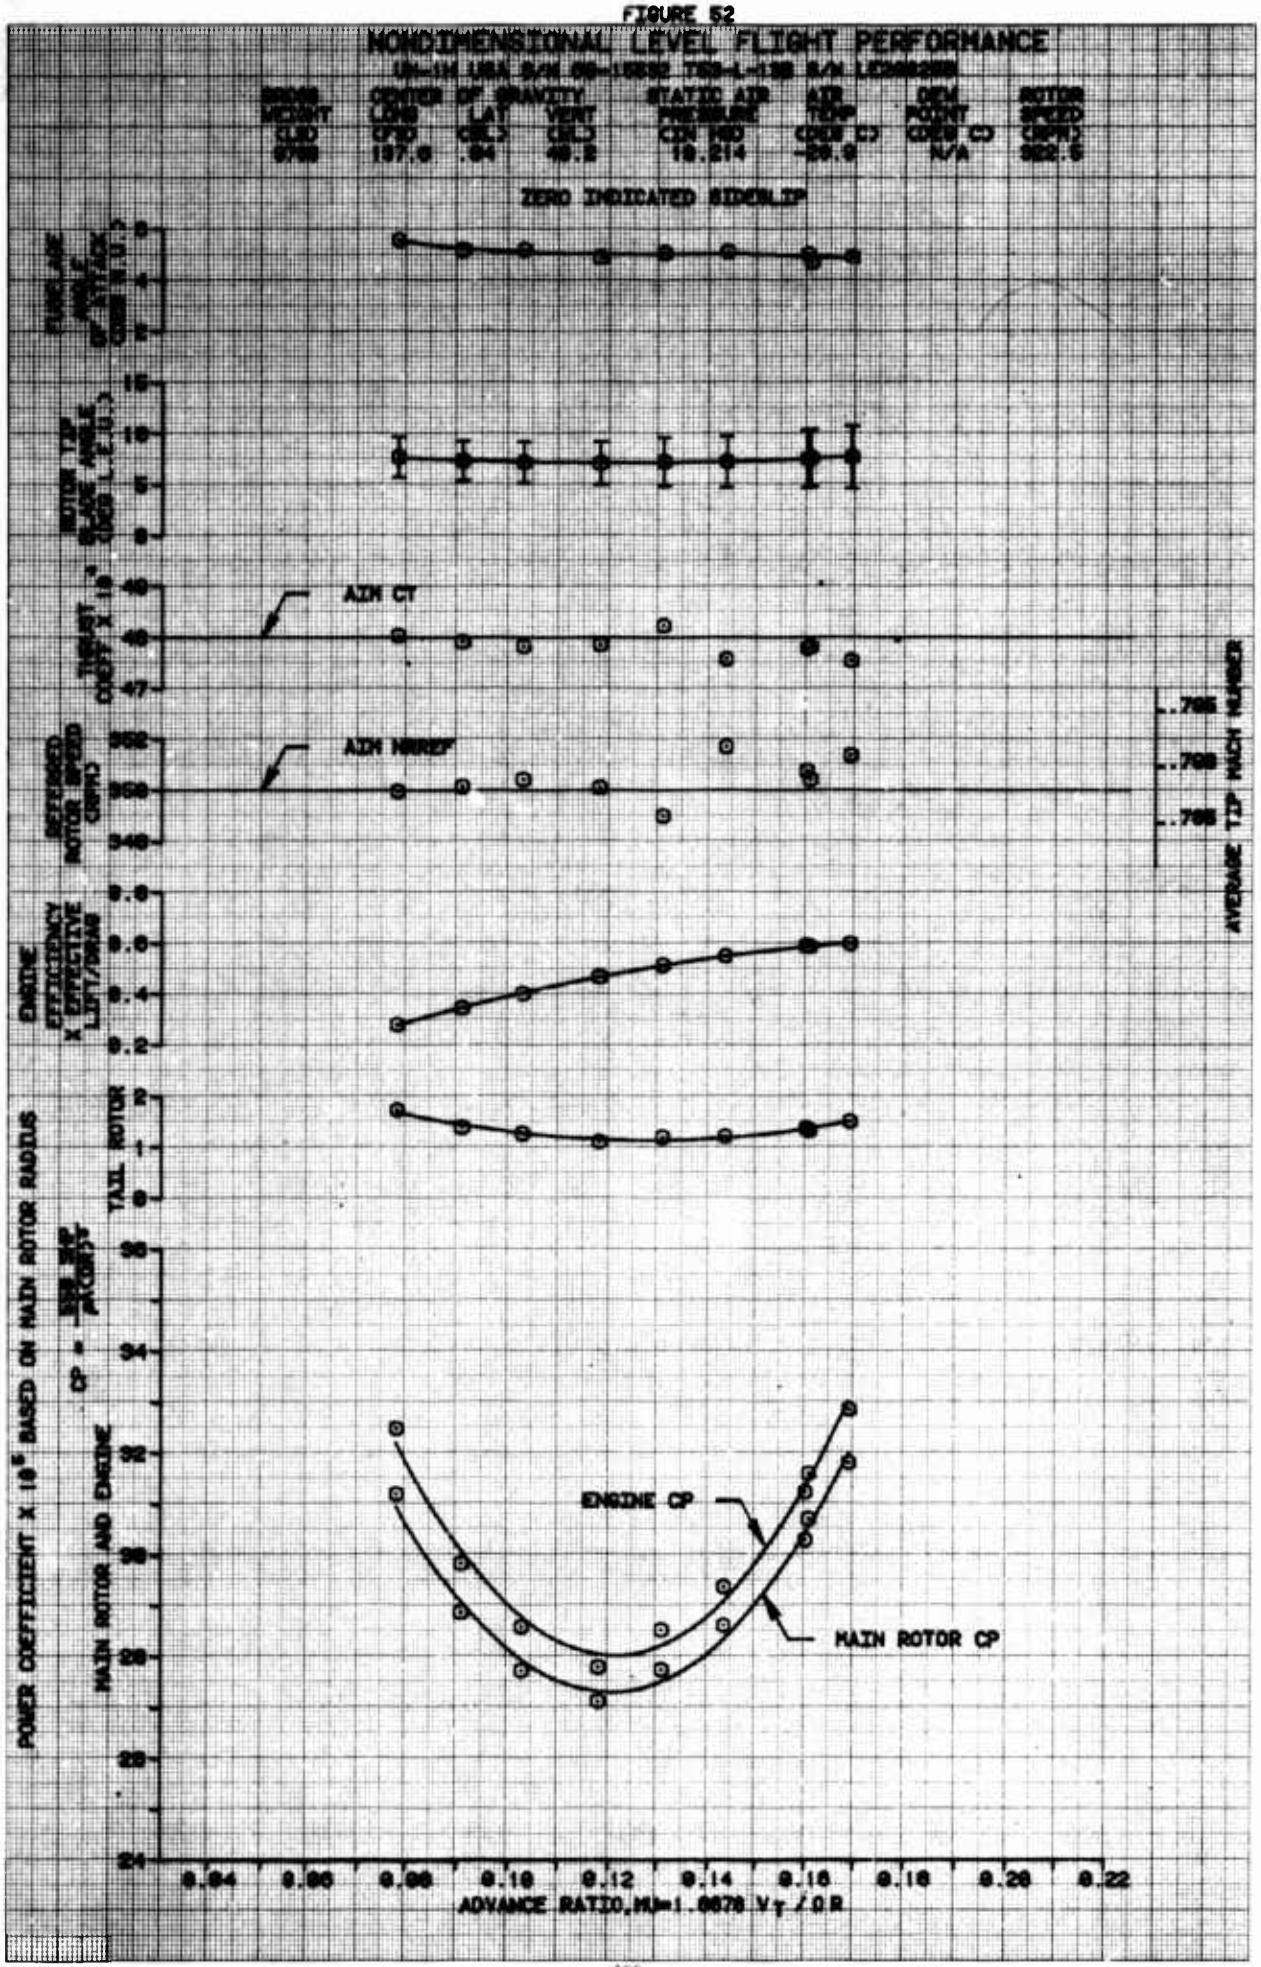

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN MRRP
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
ADVANCE RATIO, MA=1.0070 V_T / Ω R

FIGURE 53

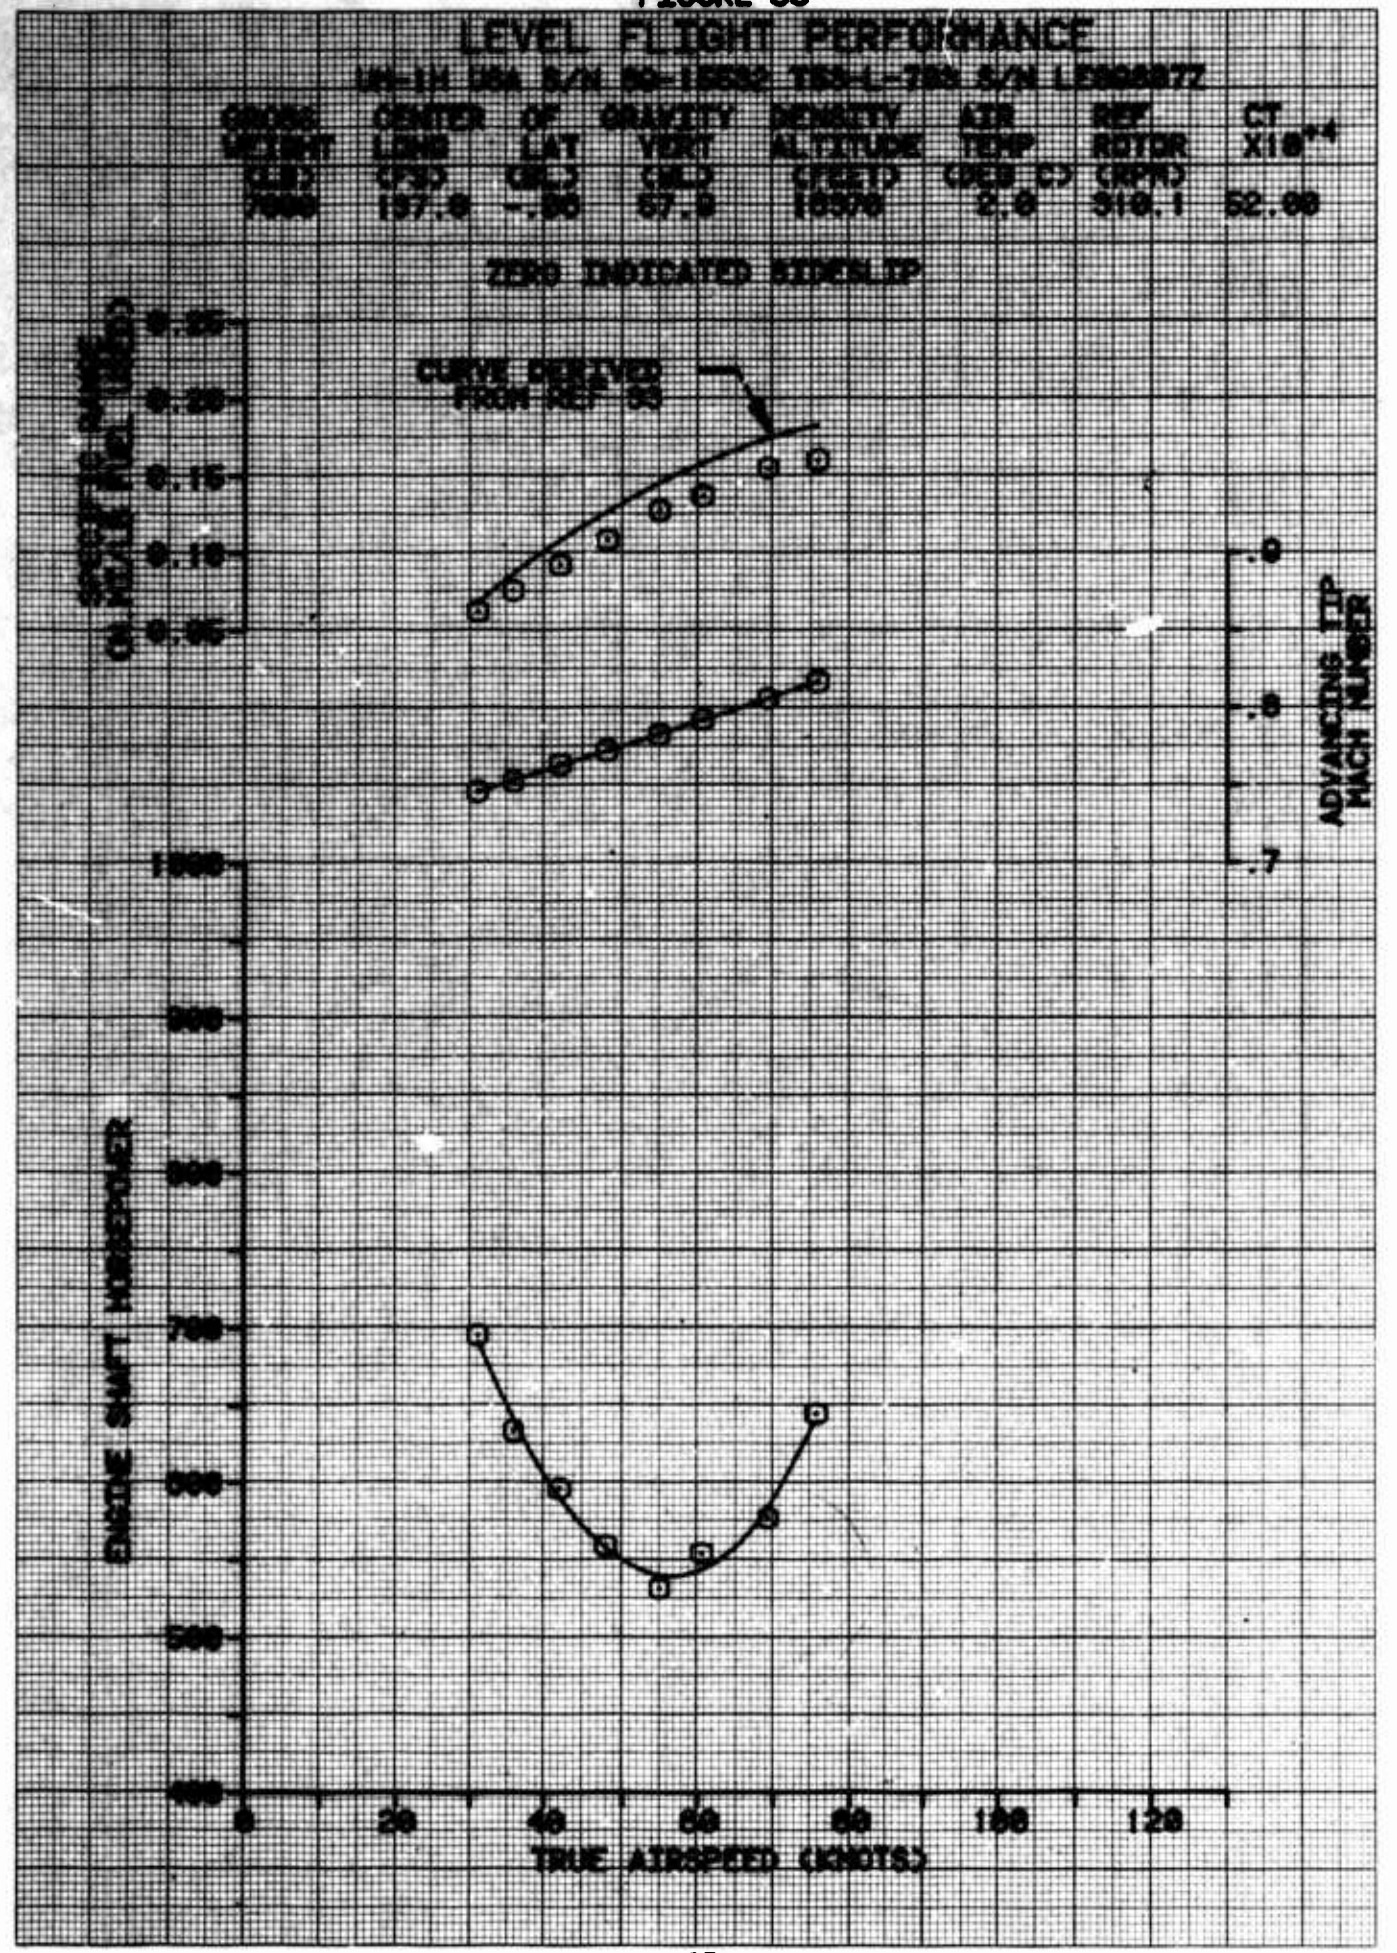

LEVEL FLIGHT PERFORMANCE
GROSS WEIGHT (LB)
CENTER OF GRAVITY LONG (IN)
CENTER OF GRAVITY LAT (IN)
CENTER OF GRAVITY VERT (IN)
DENSITY ALTITUDE (FEET)
AIR TEMP (DEG C)
REF ROTOR (RPM)
CT X10**4
7000 197.0 -.50 67.0 10000 2.0 318.1 52.00
ZERO INDICATED SIDESLIP
CURVE DERIVED FROM REF 55
ADVANCING TIP MACH NUMBER
.9
.8
.7
.25
.20
.15
.10
.05
0
1000
900
800
700
600
500
400
0
20
40
60
80
100
120
TRUE AIRSPEED (KNOTS)

FIGURE 54

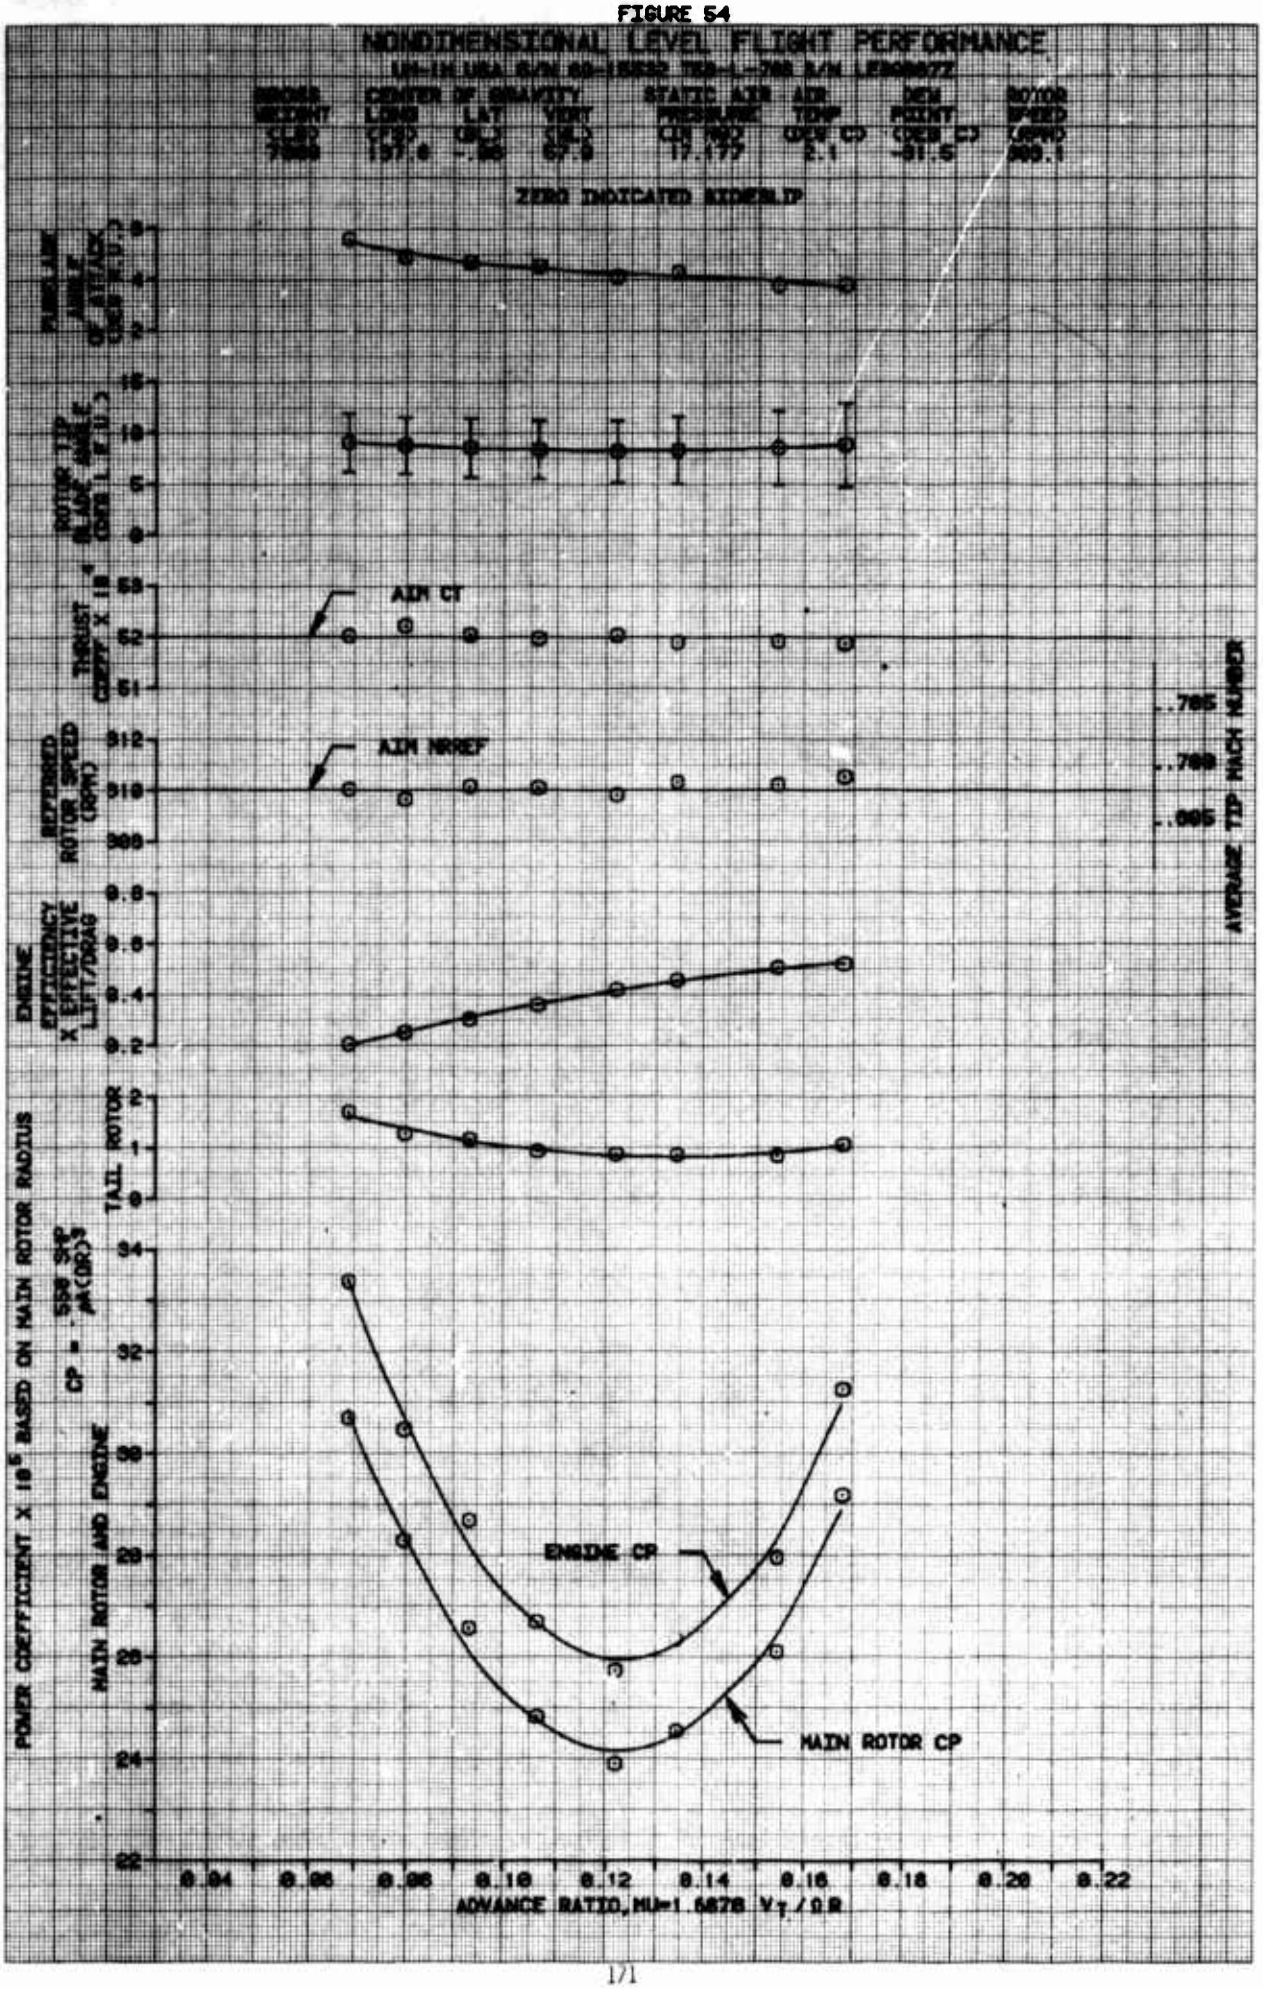

NONDIMENSIONAL LEVEL FLIGHT PERFORMANCE
ZERO INDICATED SIDESLIP
AIN CT
AIN NRREF
ENGINE CP
MAIN ROTOR CP
AVERAGE TIP MACH NUMBER
.785
.789
.885
POWER COEFFICIENT X 10^5 BASED ON MAIN ROTOR RADIUS
MAIN ROTOR AND ENGINE
TAIL ROTOR
ADVANCE RATIO, MU=1.6878 V∞/ΩR

FIGURE 55

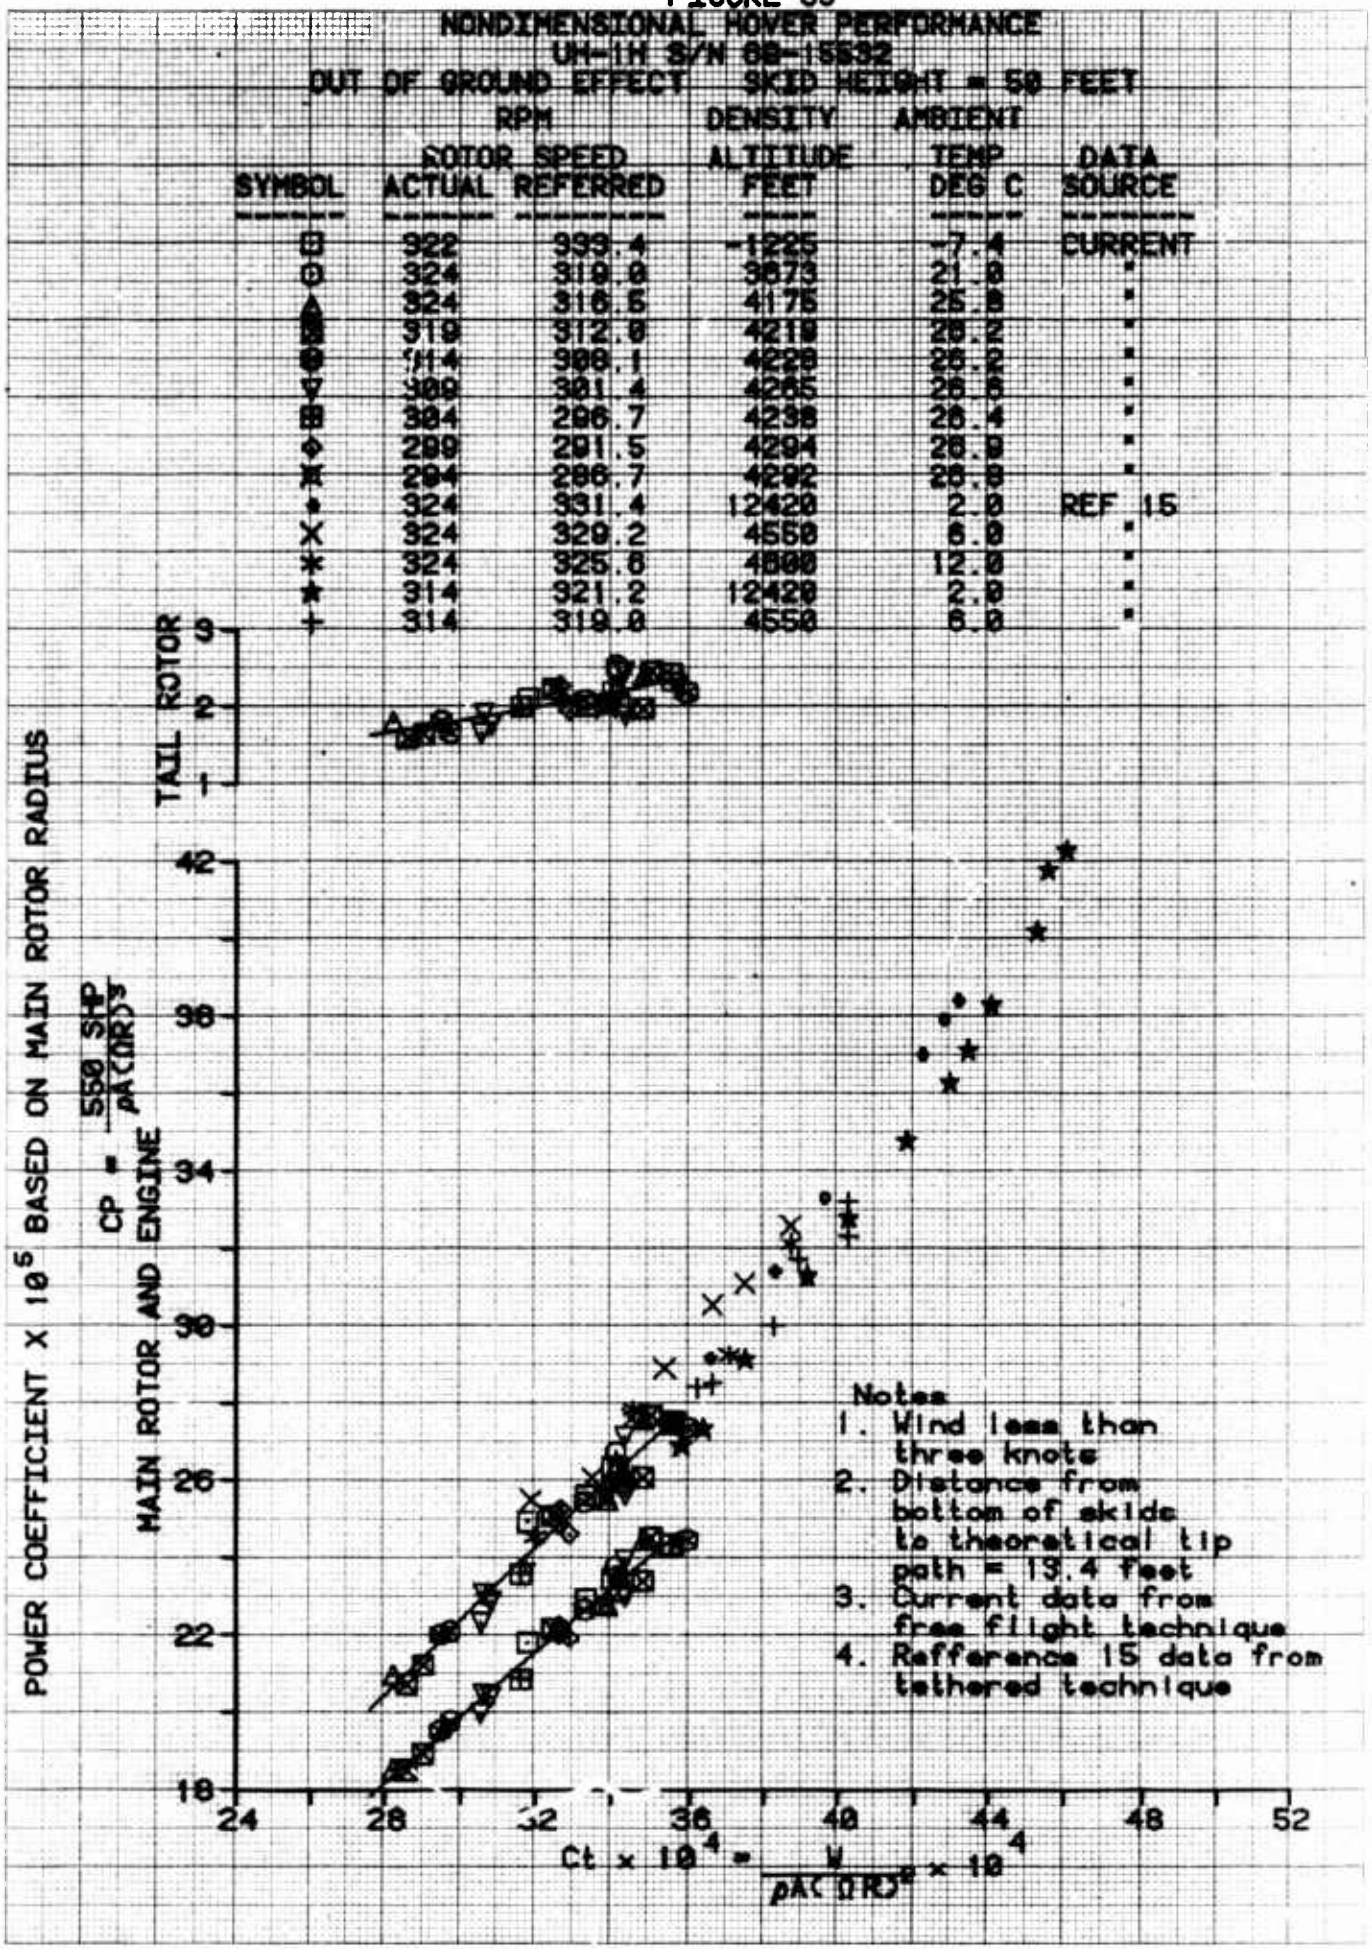

NONDIMENSIONAL HOVER PERFORMANCE
UH-1H S/N 68-15532
OUT OF GROUND EFFECT SKID HEIGHT = 50 FEET
RPM
SYMBOL | ROTOR SPEED ACTUAL | ROTOR SPEED REFERRED | DENSITY ALTITUDE FEET | AMBIENT TEMP DEG C | DATA SOURCE
⊡ 322 339.4 -1225 -7.4 CURRENT
⊙ 324 319.0 3673 21.0 "
324 316.5 4175 25.8 "
319 312.0 4219 26.2 "
314 308.1 4229 26.2 "
309 301.4 4265 26.6 "
⊞ 304 296.7 4238 26.4 "
299 291.5 4294 26.9 "
294 286.7 4292 26.8 "
• 324 331.4 12420 2.0 REF 15
X 324 329.2 4550 6.0 "
324 325.6 4800 12.0 "
★ 314 321.2 12420 2.0 "
+ 314 319.8 4550 6.0 "
TAIL ROTOR
MAIN ROTOR AND ENGINE
CP = 550 SHP / ρA(ΩR)³
POWER COEFFICIENT X 10⁵ BASED ON MAIN ROTOR RADIUS
Ct x 10⁴ = W / ρA(ΩR)² x 10⁴
Notes
1. Wind less than three knots
2. Distance from bottom of skids to theoretical tip path = 19.4 feet
3. Current data from free flight technique
4. Refference 15 data from tethered technique

FIGURE 58

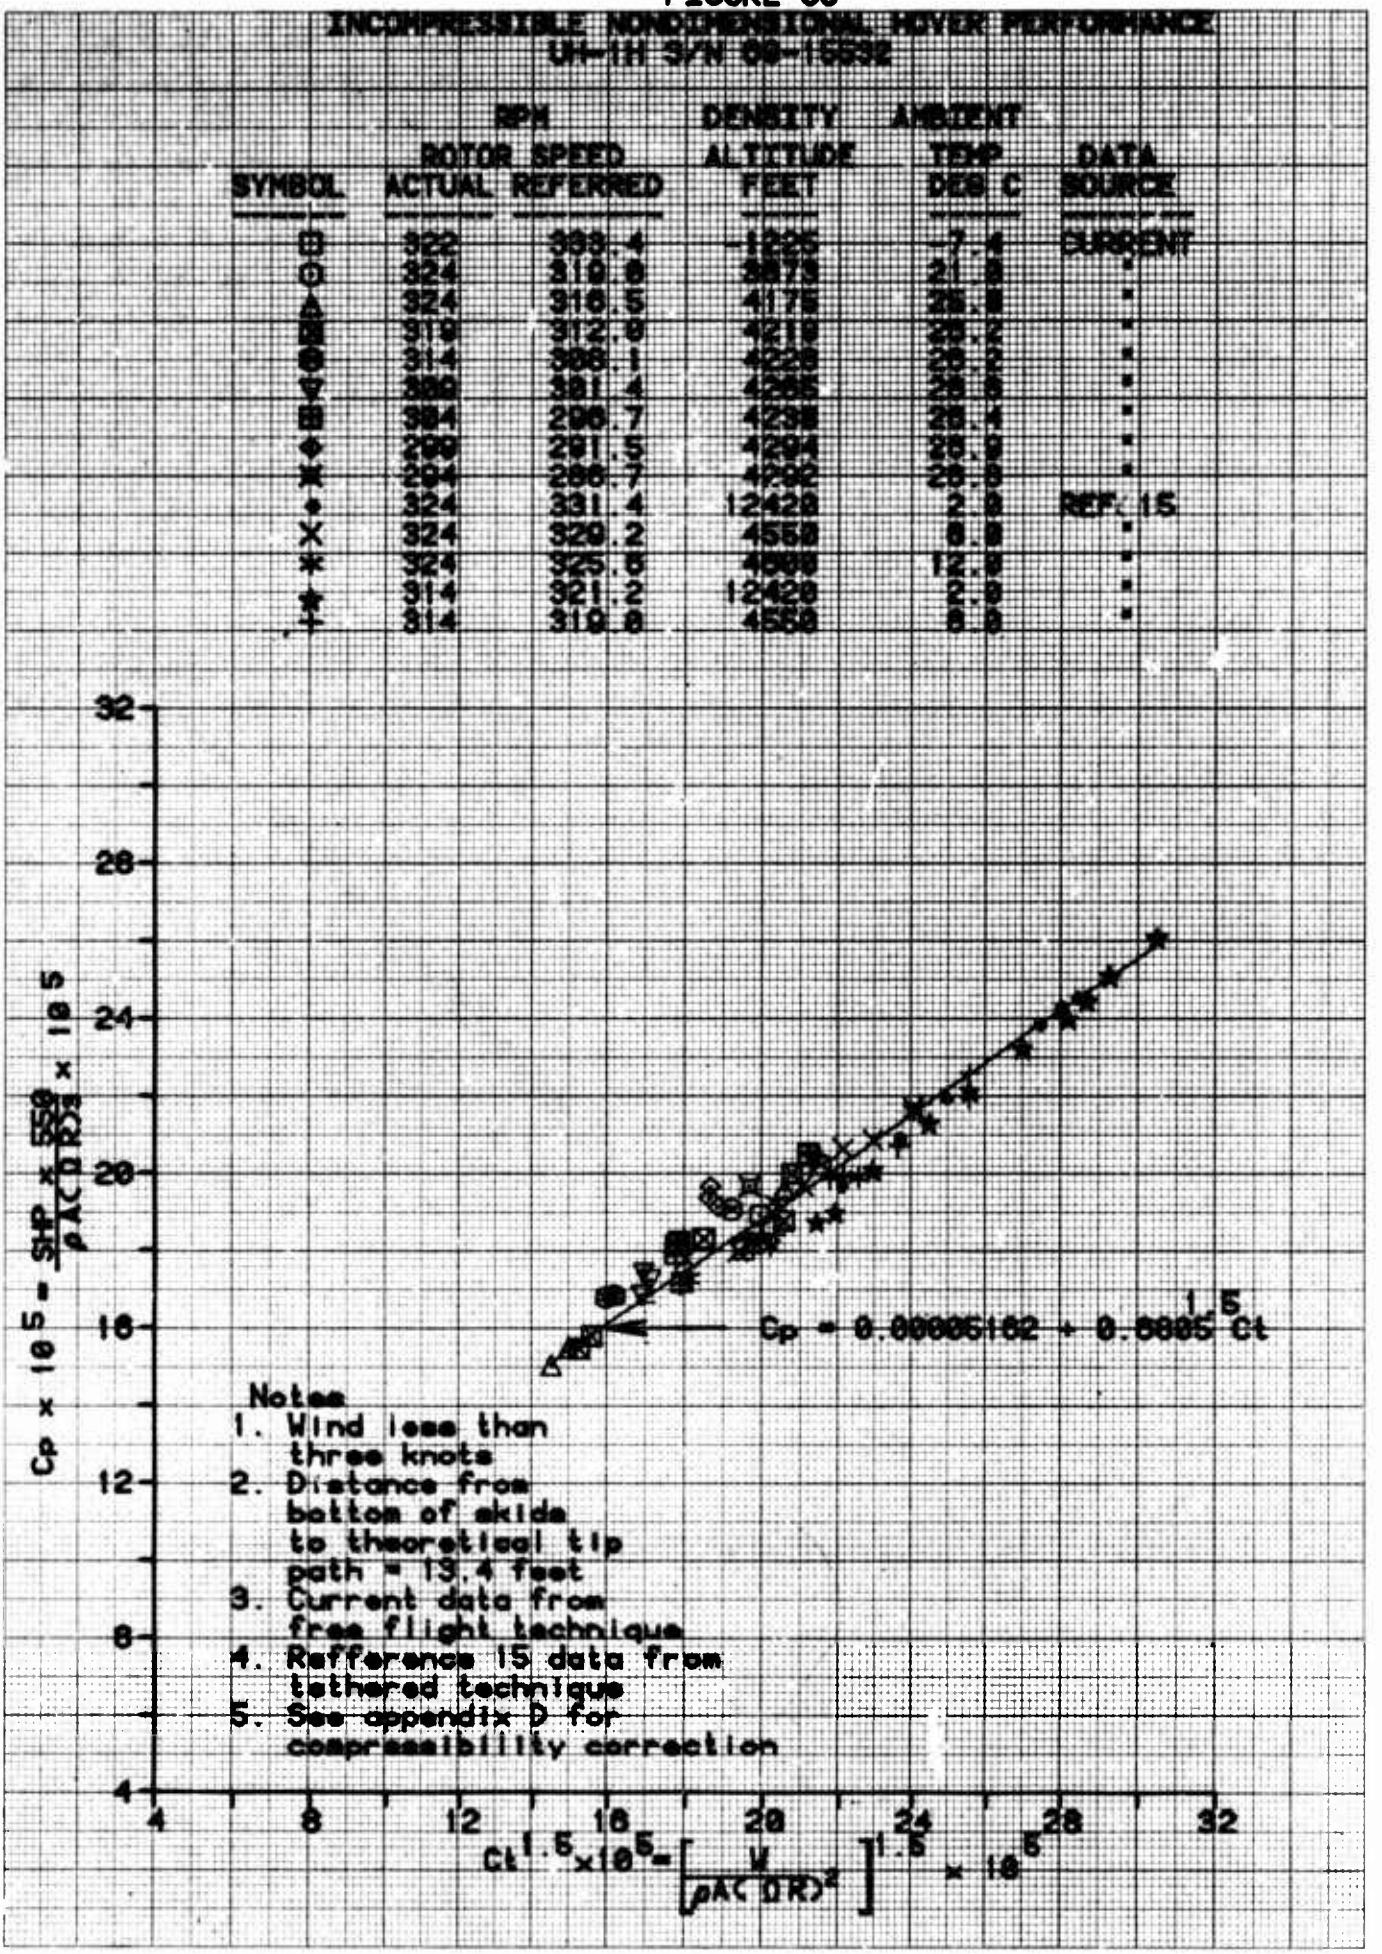

INCOMPRESSIBLE NONDIMENSIONAL HOVER PERFORMANCE
UH-1H S/N 66-16532
SYMBOL | RPM ROTOR SPEED ACTUAL | RPM ROTOR SPEED REFERRED | DENSITY ALTITUDE FEET | AMBIENT TEMP DEG C | DATA SOURCE
⊡ 322 333.4 -1225 -7.1 CURRENT
⊙ 324 319.8 3875 21.8 "
△ 324 316.5 4175 25.8 "
▣ 319 312.8 4219 26.2 "
⊕ 314 306.1 4228 26.2 "
▽ 309 301.4 4265 26.6 "
⊞ 304 296.7 4298 26.9 "
◆ 299 291.5 4294 26.9 "
✱ 294 286.7 4292 26.8 "
• 324 331.4 12428 2.8 REF. 15
X 324 320.2 4558 8.8 "
* 324 325.6 4569 12.8 "
✱ 314 321.2 12428 2.8 "
+ 314 319.8 4558 8.8 "
$C_p \times 10^5 = \frac{SHP \times 550}{\rho A (\Omega R)^3} \times 10^5$
$C_p = 0.00005182 + 0.0885\, C_t^{1.5}$
Notes
1. Wind less than three knots
2. Distance from bottom of skids to theoretical tip path = 13.4 feet
3. Current data from free flight technique
4. Refference 15 data from tethered technique
5. See appendix D for compressibility correction
$C_t^{1.5} \times 10^5 = \left[\frac{W}{\rho A (\Omega R)^2}\right]^{1.5} \times 10^5$
4 8 12 16 20 24 28 32

FIGURE 57

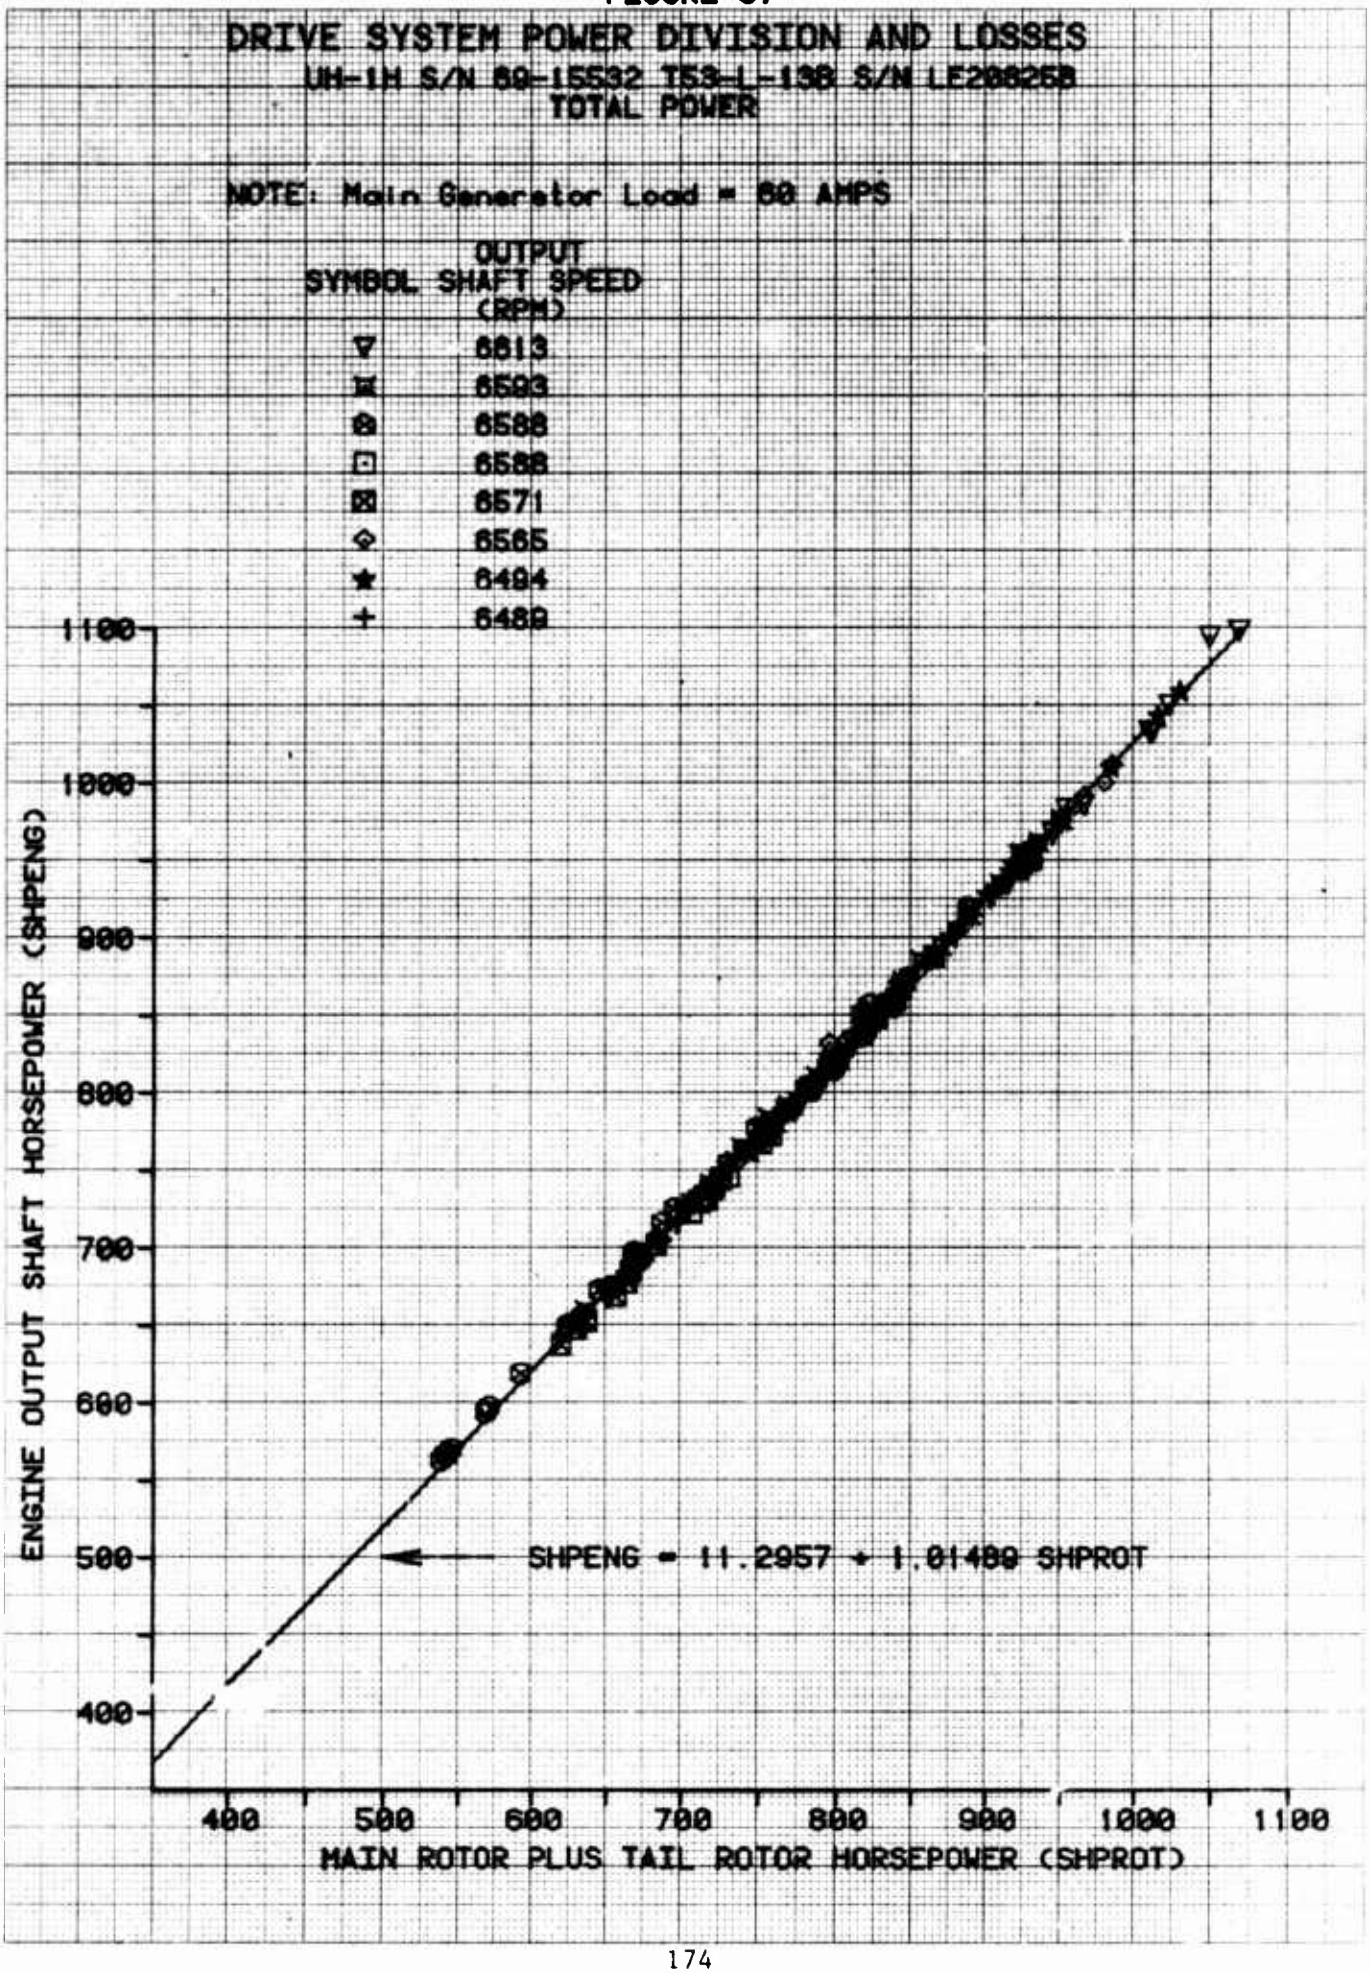

DRIVE SYSTEM POWER DIVISION AND LOSSES
UH-1H S/N 69-15532 T53-L-13B S/N LE26625B
TOTAL POWER
NOTE: Main Generator Load = 80 AMPS
SYMBOL
OUTPUT SHAFT SPEED (RPM)
6613
6593
6588
6588
6571
6565
6494
6489
ENGINE OUTPUT SHAFT HORSEPOWER (SHPENG)
1100
1000
900
800
700
600
500
400
SHPENG = 11.2957 + 1.01489 SHPROT
400
500
600
700
800
900
1000
1100
MAIN ROTOR PLUS TAIL ROTOR HORSEPOWER (SHPROT)

FIGURE 58

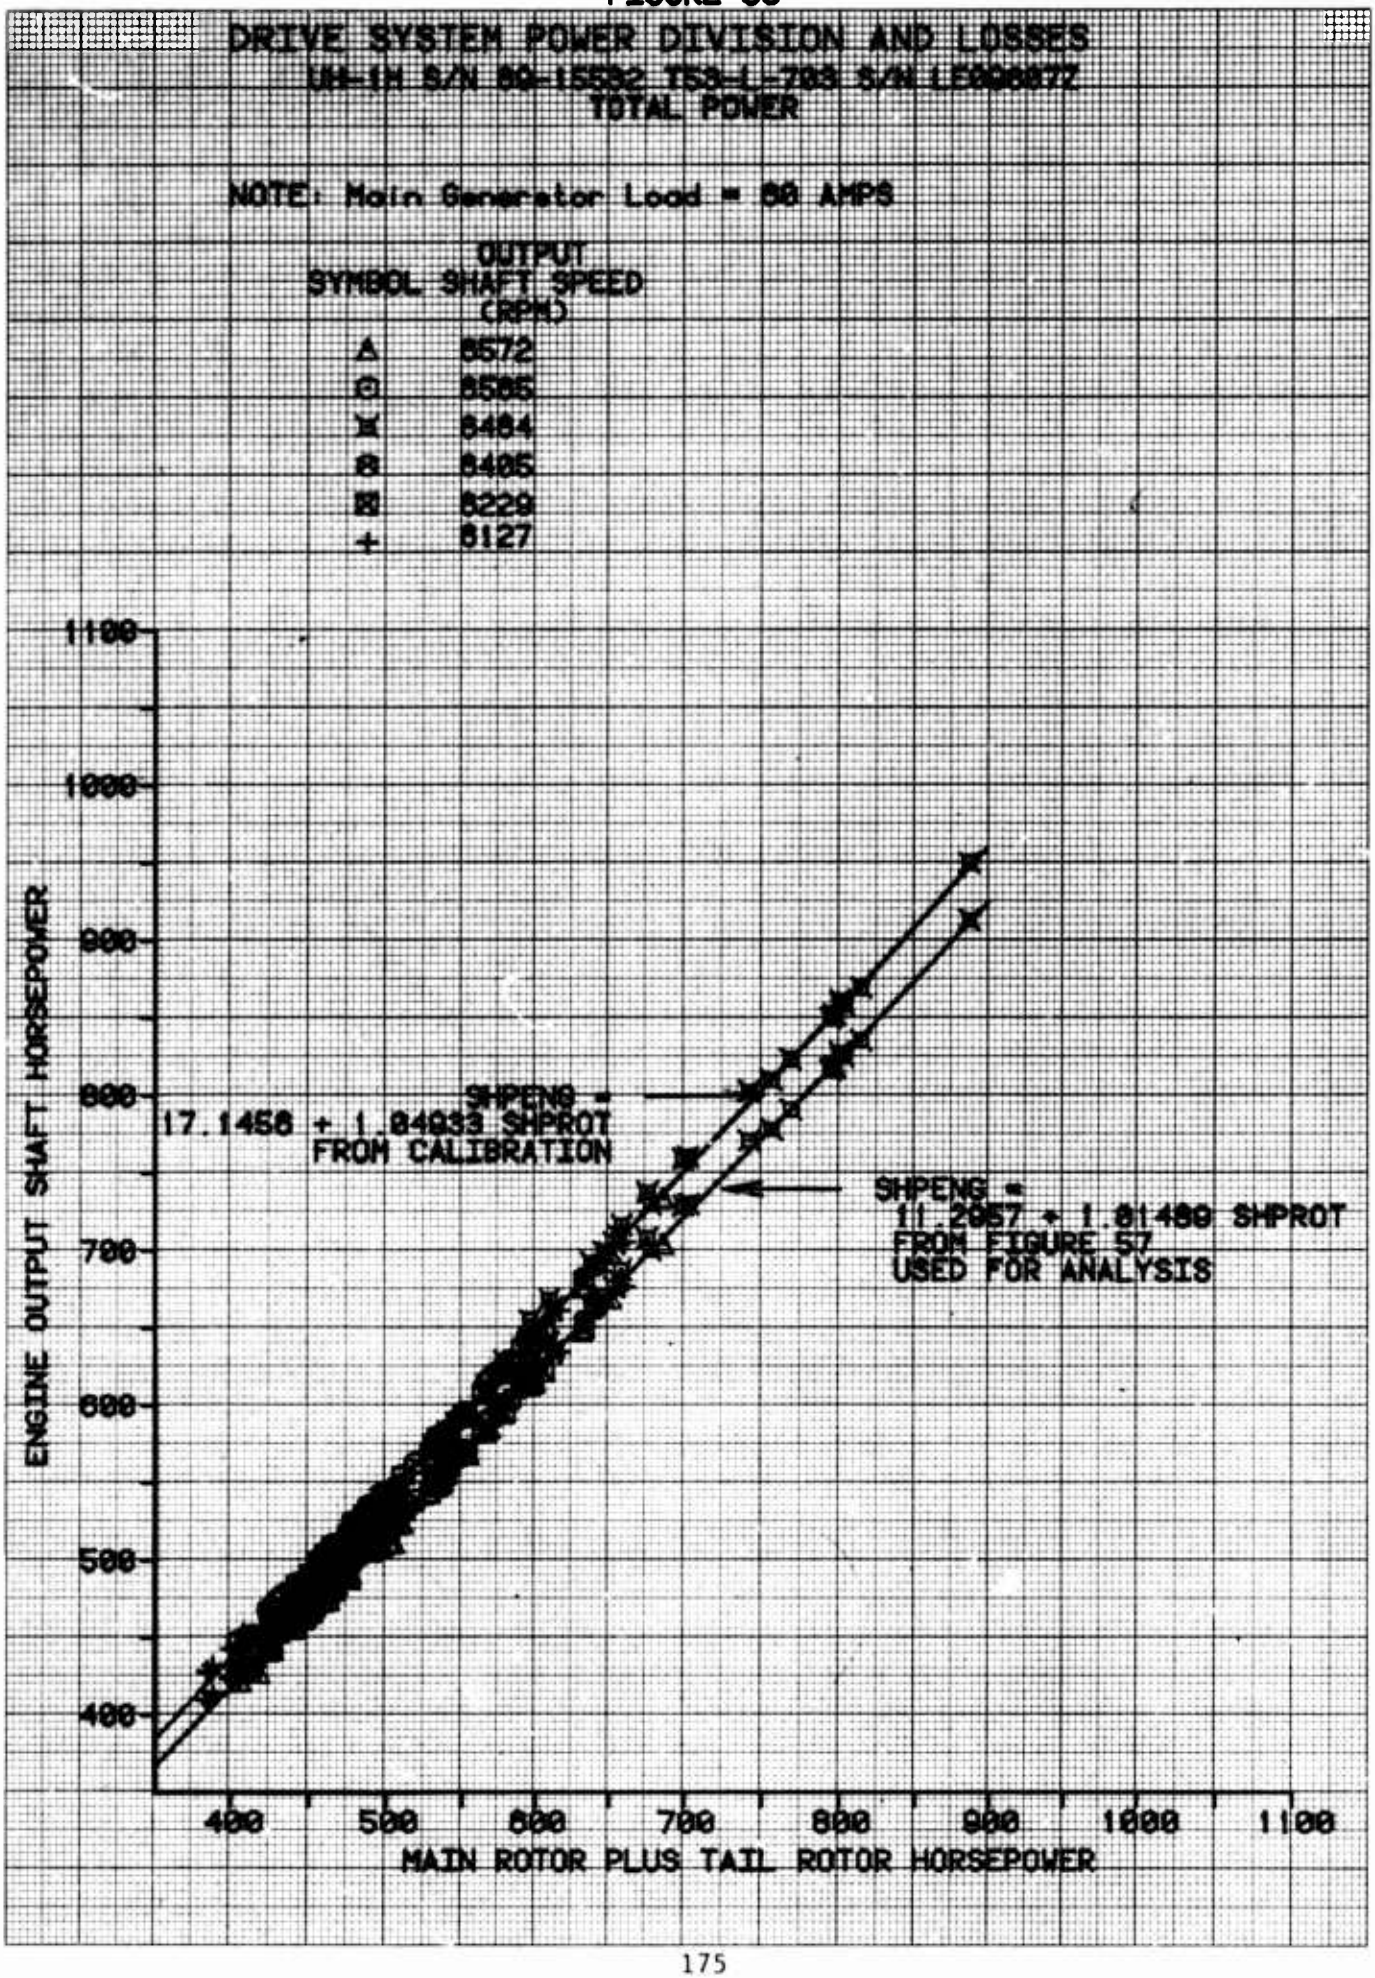

DRIVE SYSTEM POWER DIVISION AND LOSSES
UH-1H S/N 69-15582 T53-L-703 S/N LE000877
TOTAL POWER
NOTE: Main Generator Load = 50 AMPS
OUTPUT SHAFT SPEED (RPM)
SYMBOL
A 6572
6506
6484
6405
6229
6127
ENGINE OUTPUT SHAFT HORSEPOWER
1100
1000
900
800
700
600
500
400
SHPENG =
17.1458 + 1.04933 SHPROT
FROM CALIBRATION
SHPENG =
11.2957 + 1.01480 SHPROT
FROM FIGURE 57
USED FOR ANALYSIS
400
500
600
700
800
900
1000
1100
MAIN ROTOR PLUS TAIL ROTOR HORSEPOWER

FIGURE 59

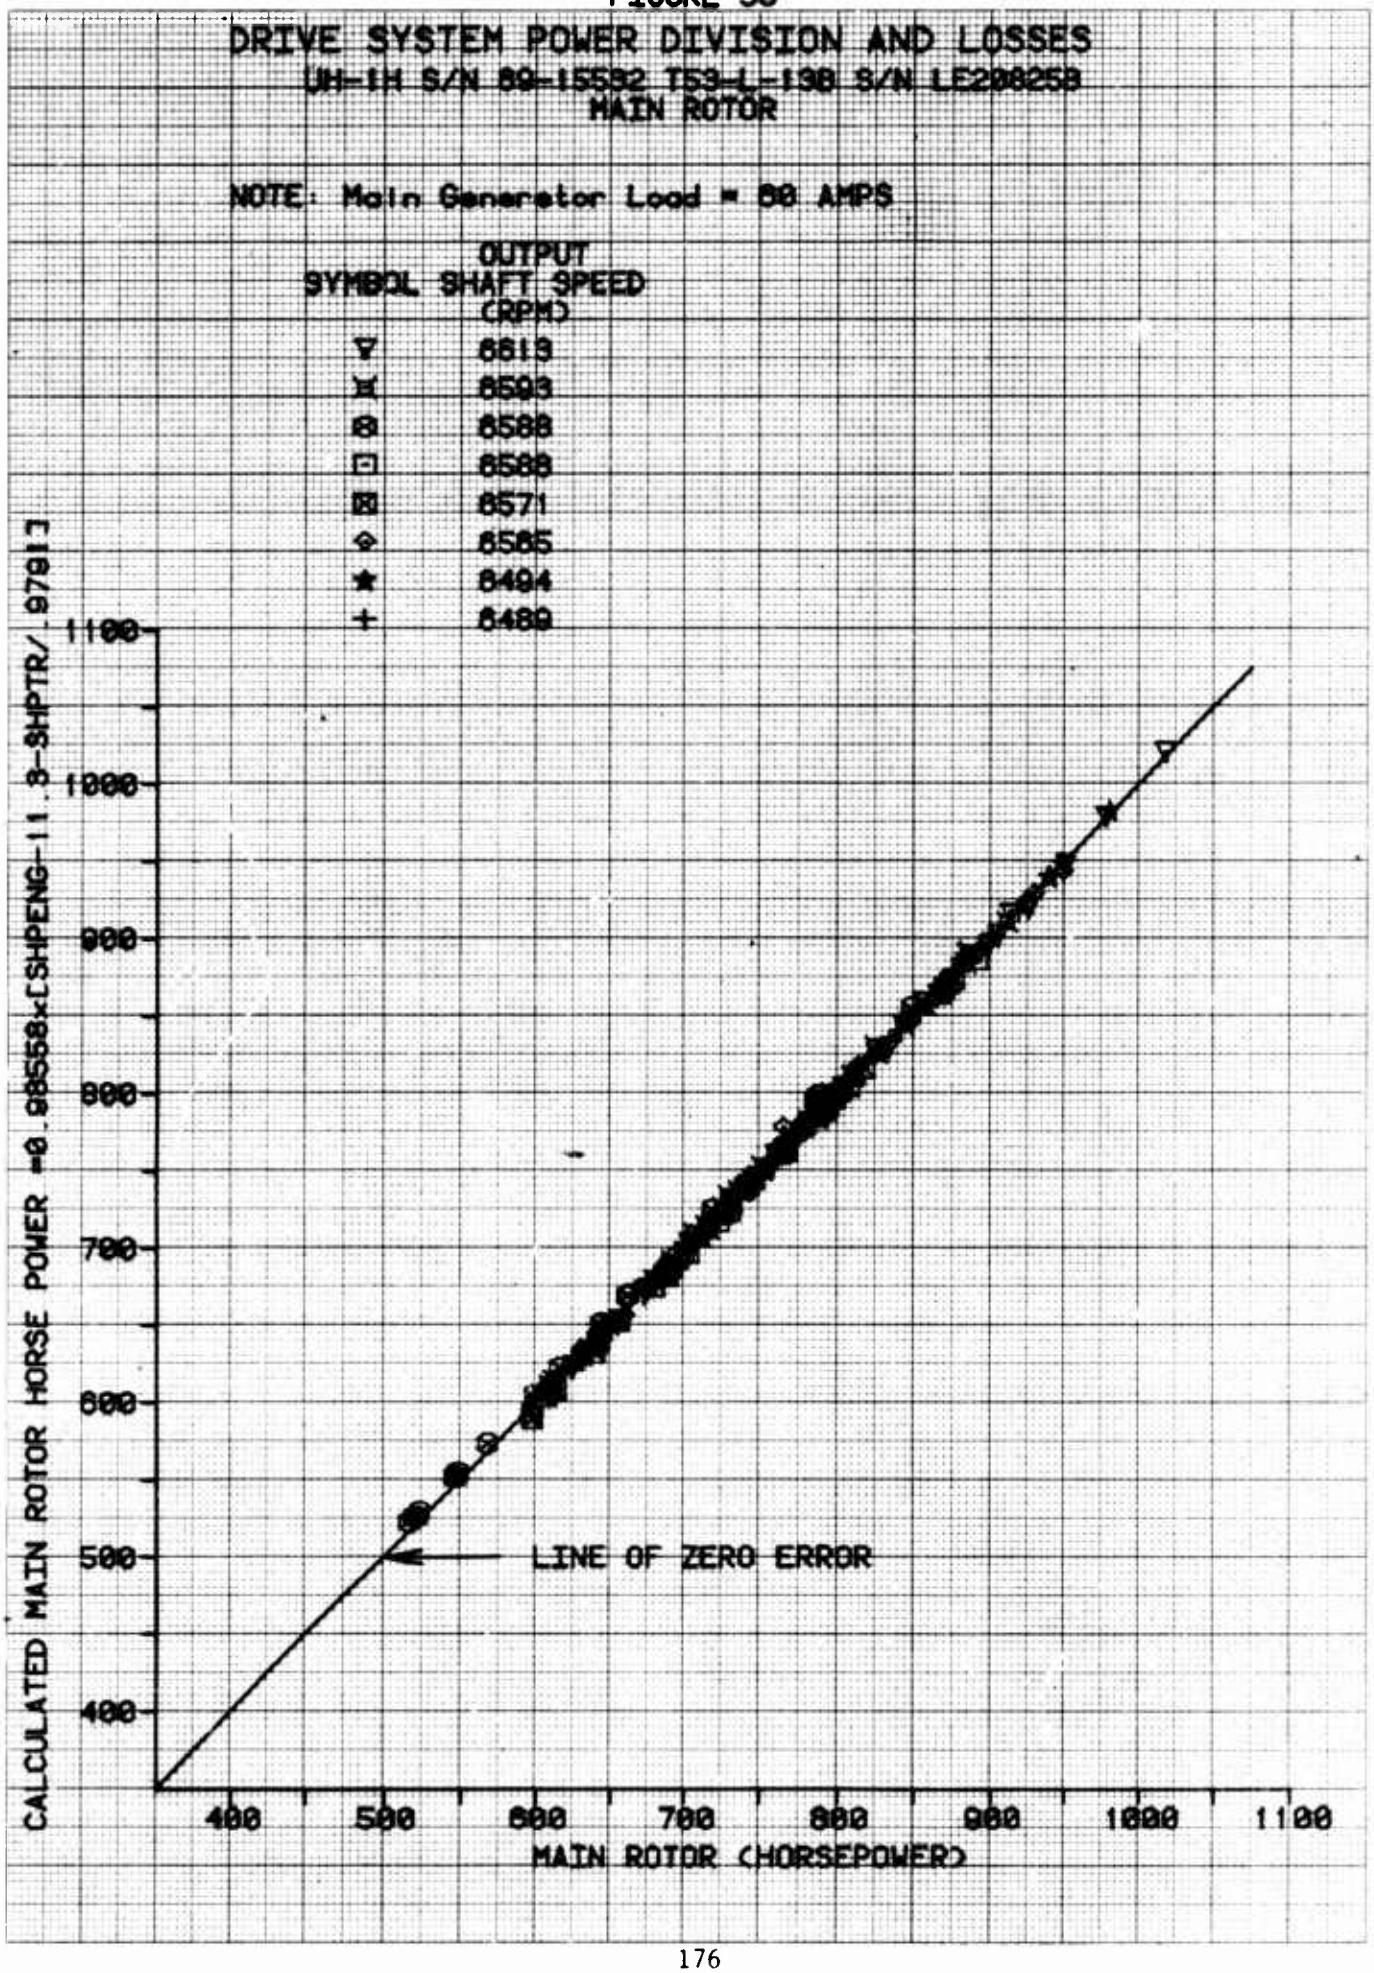

DRIVE SYSTEM POWER DIVISION AND LOSSES
UH-1H S/N 69-15582 T53-L-13B S/N LE208258
MAIN ROTOR
NOTE: Main Generator Load = 80 AMPS
SYMBOL
OUTPUT SHAFT SPEED (RPM)
6613
6593
6588
6588
6571
6585
6494
6489
CALCULATED MAIN ROTOR HORSE POWER =0.98558×(SHPENG-11.8-SHPTR/.9781)
1100
1000
900
800
700
600
500
400
LINE OF ZERO ERROR
400
500
600
700
800
900
1000
1100
MAIN ROTOR (HORSEPOWER)

FIGURE 60

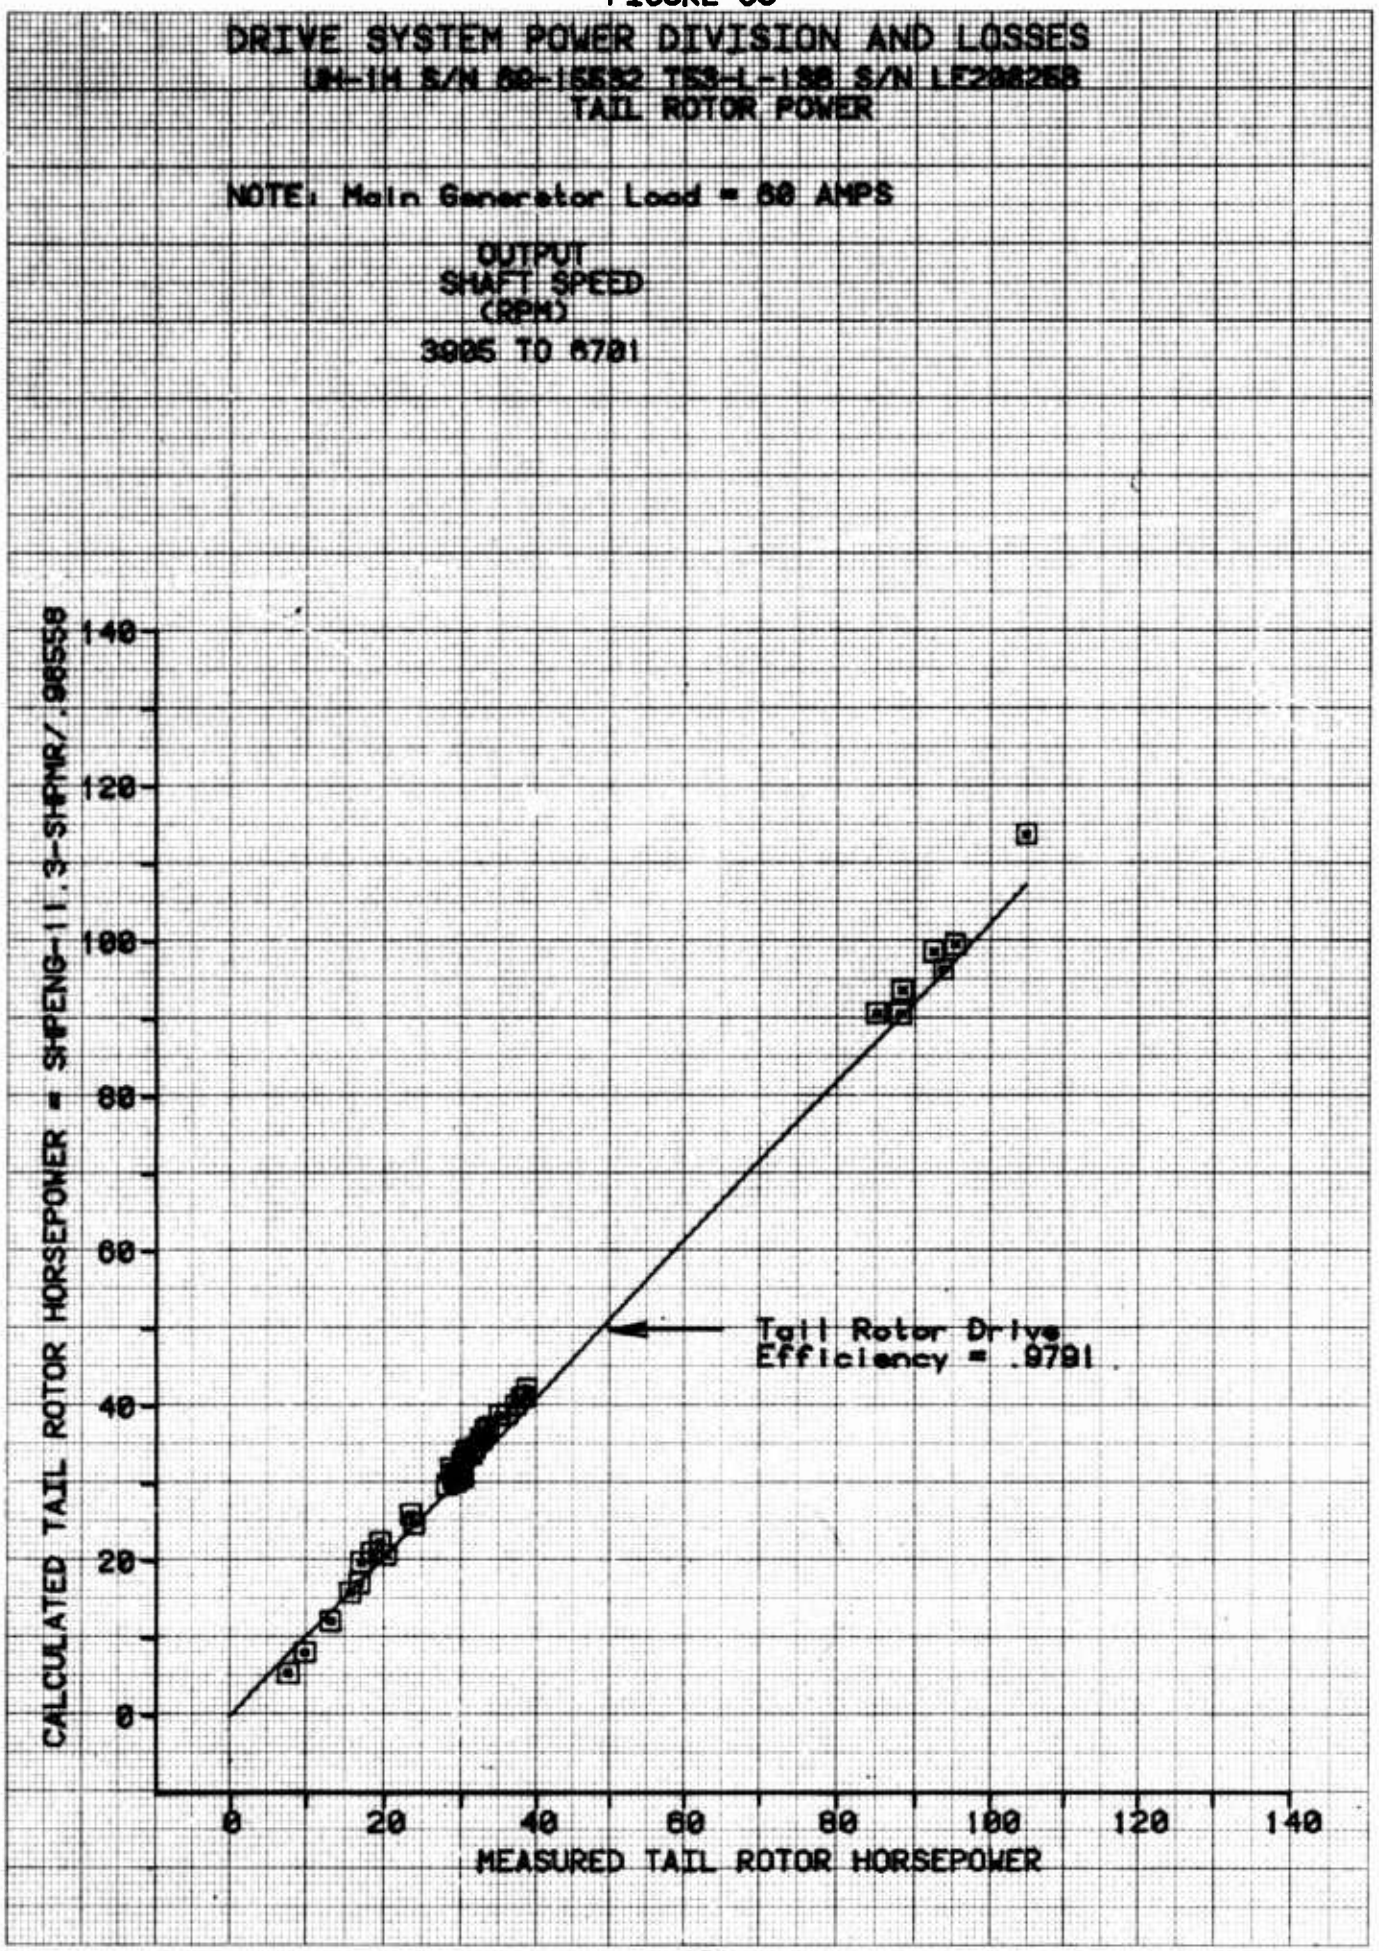
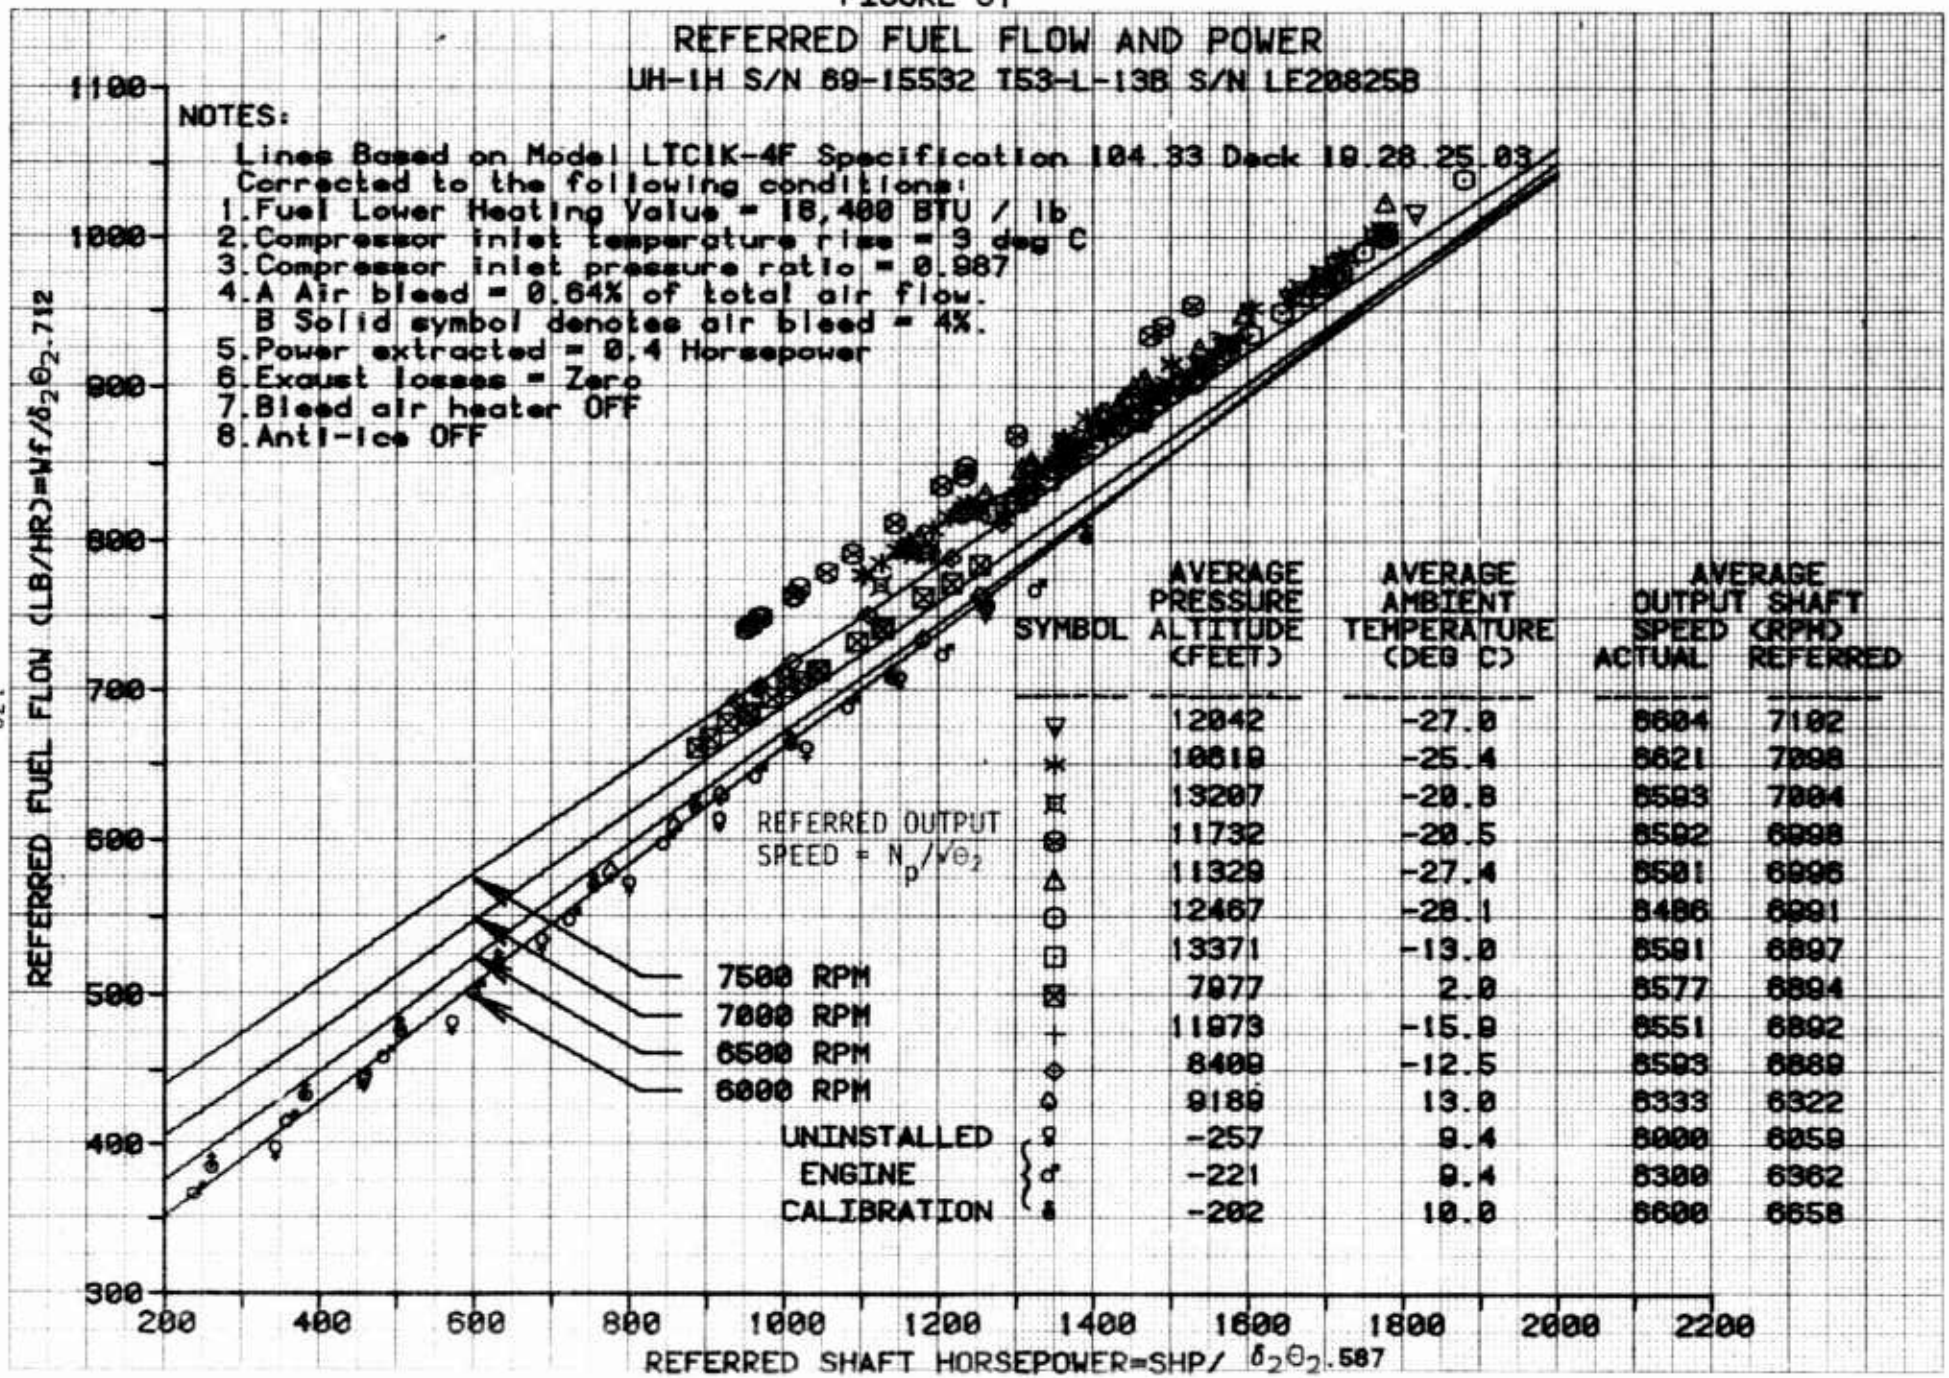

DRIVE SYSTEM POWER DIVISION AND LOSSES
UH-1H S/N 66-15552 T53-L-13B S/N LE206268
TAIL ROTOR POWER
NOTE: Main Generator Load = 60 AMPS
OUTPUT
SHAFT SPEED
(RPM)
3005 TO 6701
CALCULATED TAIL ROTOR HORSEPOWER = SHPENG-11.3-SHPMR/.96558
0
20
40
60
80
100
120
140
MEASURED TAIL ROTOR HORSEPOWER
Tail Rotor Drive
Efficiency = .9791

FIGURE 61



SYMBOL	AVERAGE PRESSURE ALTITUDE (FEET)	AVERAGE AMBIENT TEMPERATURE (DEG C)	AVERAGE OUTPUT SHAFT SPEED (RPM) ACTUAL	REFERRED
▽	12042	-27.0	6604	7102
✳	10619	-25.4	6621	7098
▣	13207	-28.8	6593	7084
⊗	11732	-28.5	6592	6998
△	11329	-27.4	6581	6996
⊕	12467	-28.1	6486	6991
⊡	13371	-13.0	6591	6897
⊠	7977	2.0	6577	6894
+	11973	-15.9	6551	6892
◈	8409	-12.5	6593	6889
△	9189	13.0	6333	6322
♀	-257	9.4	6000	6059
♂	-221	9.4	6300	6362
♂	-202	10.0	6600	6658

FIGURE 62

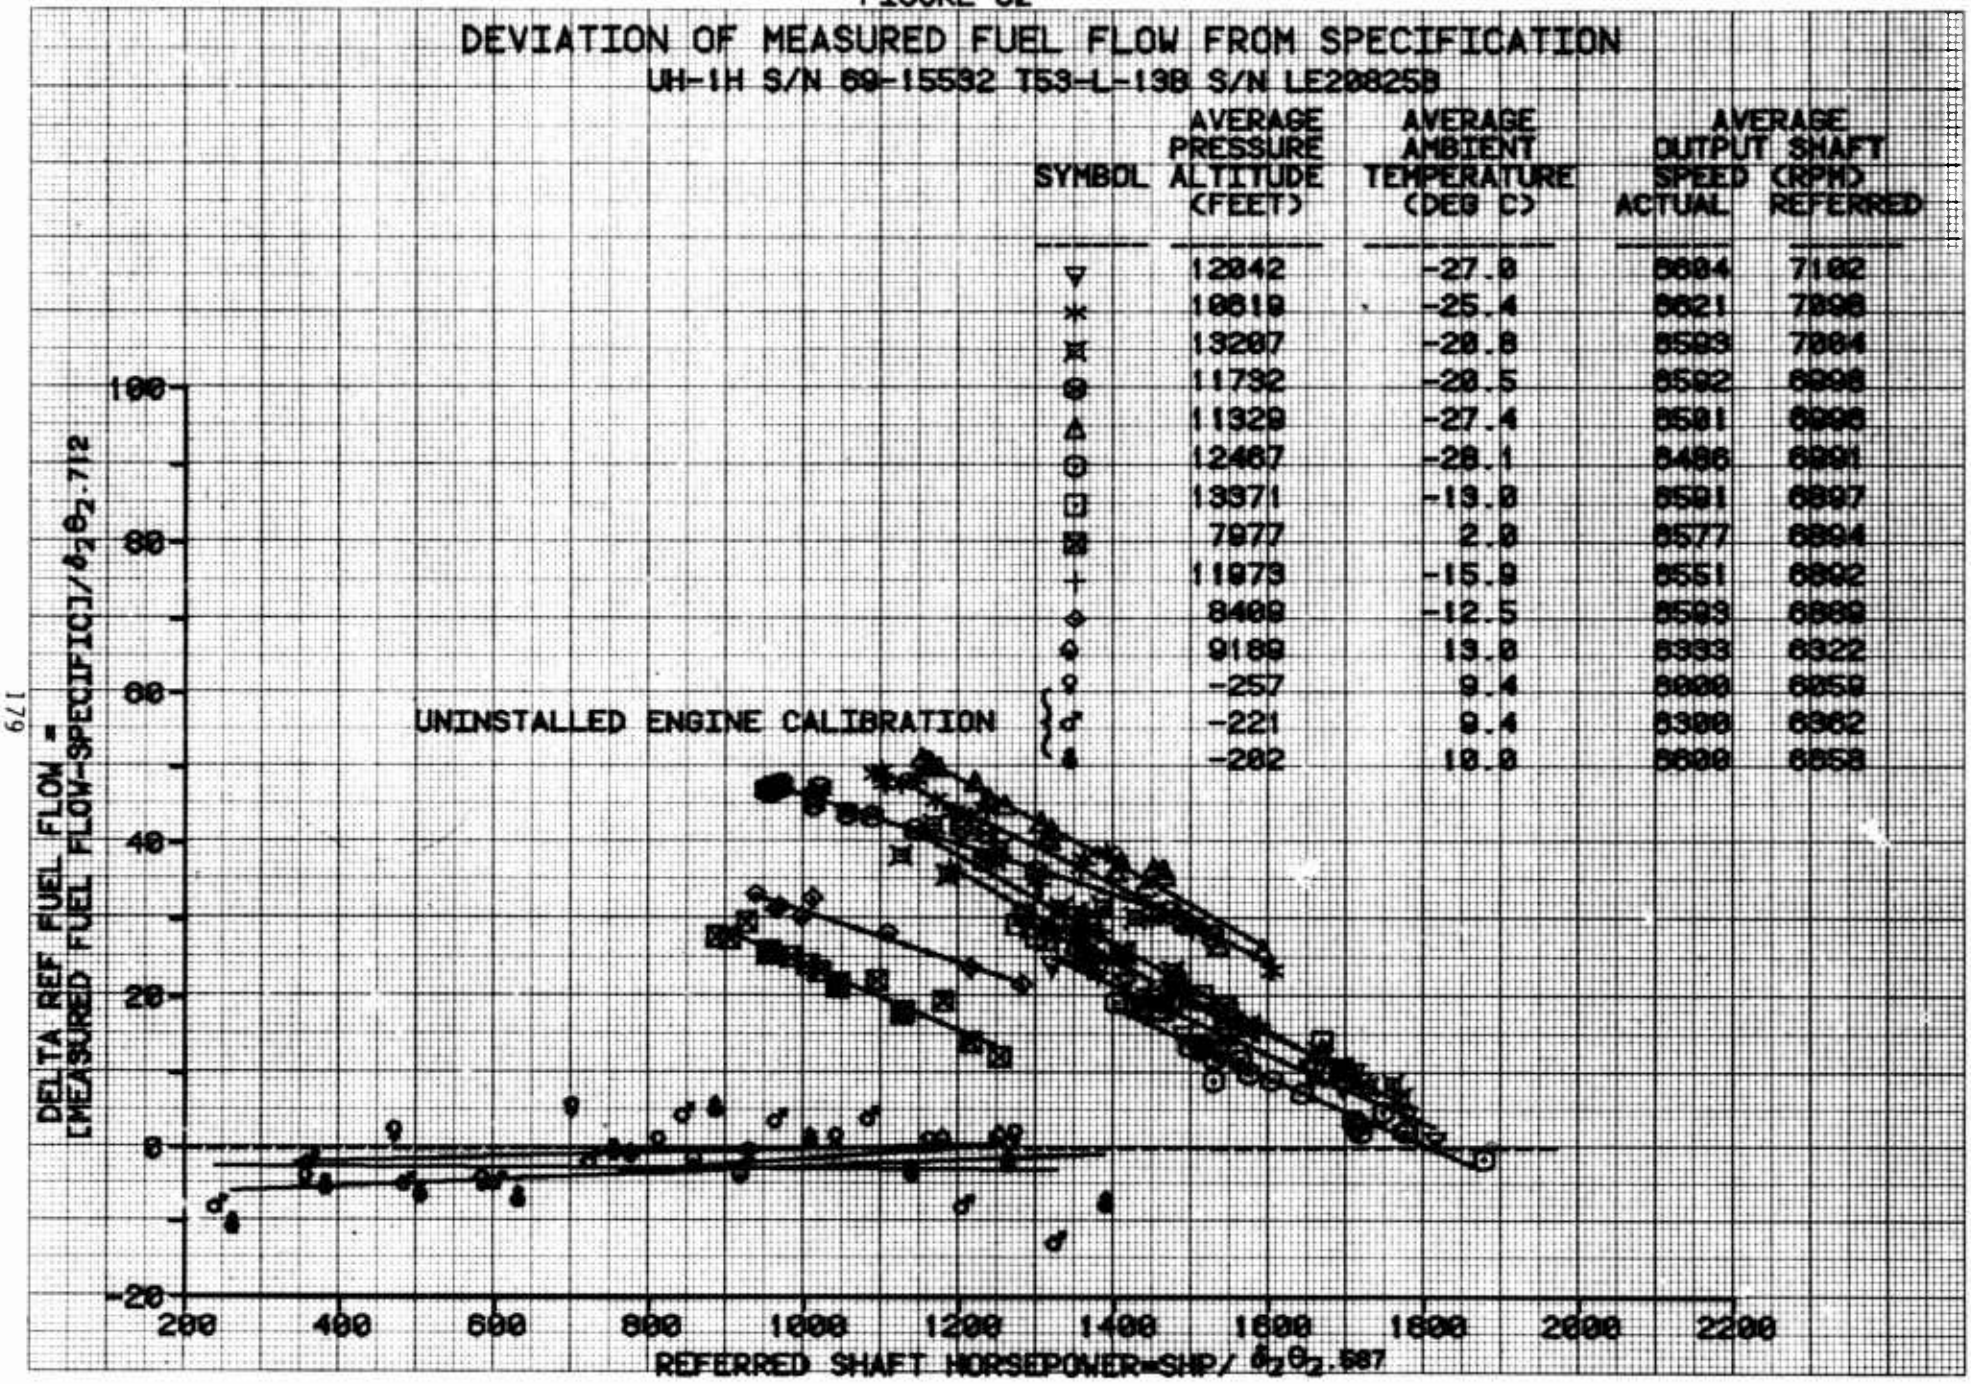

DEVIATION OF MEASURED FUEL FLOW FROM SPECIFICATION
UH-1H S/N 69-15592 T53-L-13B S/N LE20825B
SYMBOL | AVERAGE PRESSURE ALTITUDE (FEET) | AVERAGE AMBIENT TEMPERATURE (DEG C) | AVERAGE OUTPUT SHAFT SPEED (RPM) ACTUAL | REFERRED
12842 -27.9 6604 7102
10619 -25.4 6621 7096
13207 -28.8 6593 7084
11732 -28.5 6592 6098
11329 -27.4 6591 6096
12467 -28.1 6486 6091
13371 -13.9 6591 6097
7977 2.9 6577 6094
11973 -15.9 6551 6092
8409 -12.5 6593 6088
9189 13.9 6333 6322
-257 9.4 6000 6059
-221 9.4 6300 6362
-202 10.9 6600 6658
UNINSTALLED ENGINE CALIBRATION
DELTA REF FUEL FLOW = [MEASURED FUEL FLOW-SPECIFIC]/δ2θ2.712
100
80
60
40
20
0
-20
200
400
600
800
1000
1200
1400
1600
1800
2000
2200
REFERRED SHAFT HORSEPOWER=SHP/ δ2θ2.587

FIGURE 63

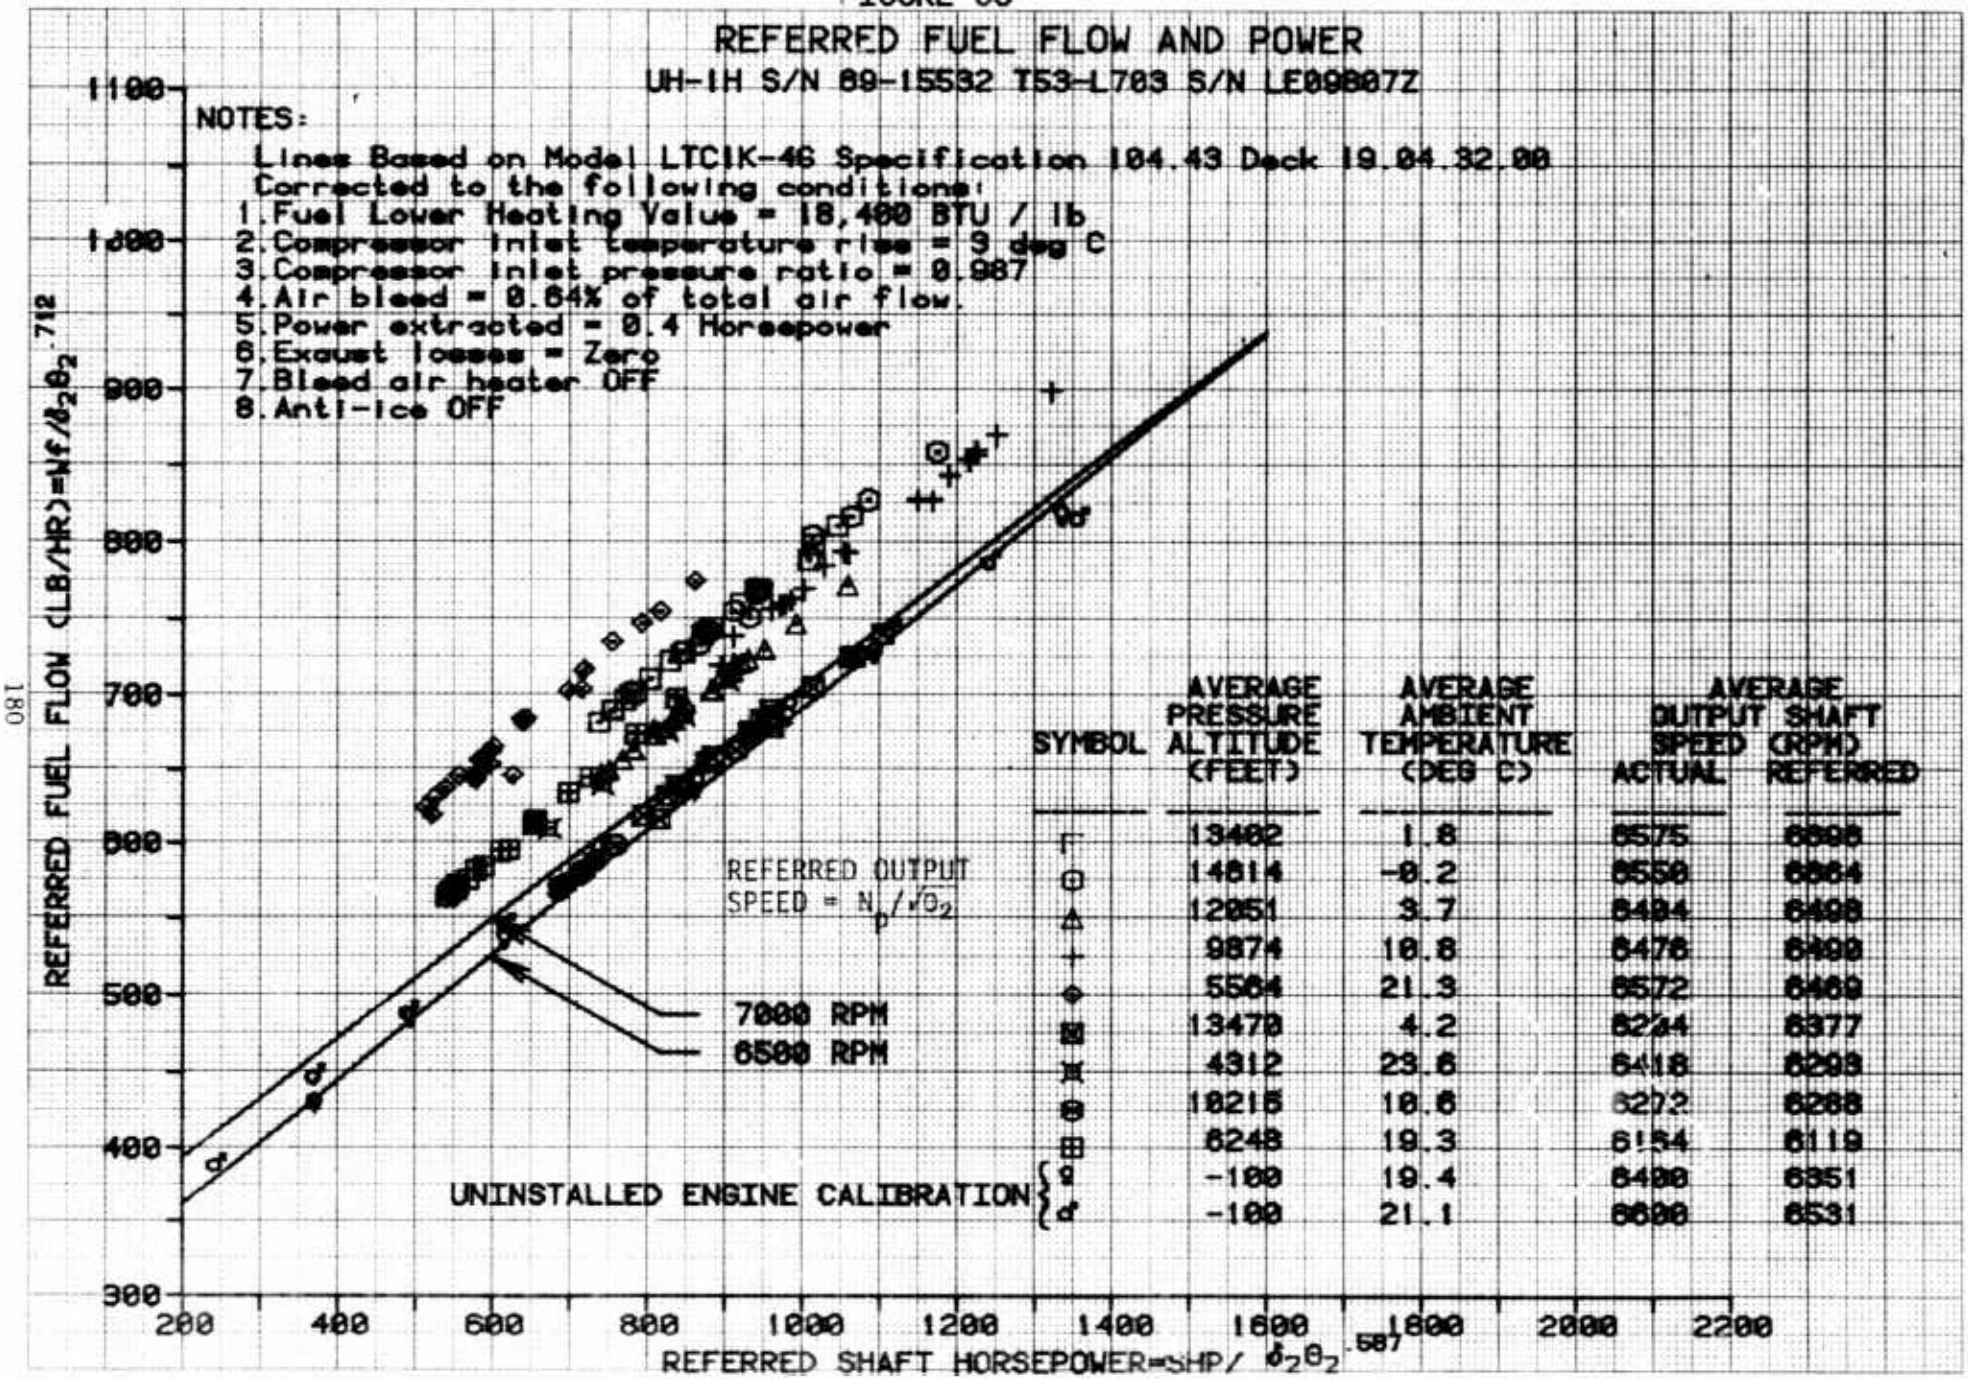

REFERRED FUEL FLOW AND POWER
UH-1H S/N 69-15532 T53-L703 S/N LE090807Z
NOTES:
Lines Based on Model LTCIK-46 Specification 104.43 Deck 19.04.32.00
Corrected to the following conditions:
1. Fuel Lower Heating Value = 18,400 BTU / lb
2. Compressor inlet temperature rise = 9 deg C
3. Compressor inlet pressure ratio = 0.987
4. Air bleed = 0.64% of total air flow.
5. Power extracted = 0.4 Horsepower
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-ice OFF
REFERRED FUEL FLOW (LB/HR)=Wf/δ2θ2.712
REFERRED SHAFT HORSEPOWER=SHP/ δ2θ2.587
REFERRED OUTPUT SPEED = Np/√θ2
7000 RPM
6500 RPM
UNINSTALLED ENGINE CALIBRATION
SYMBOL
AVERAGE PRESSURE ALTITUDE (FEET)
AVERAGE AMBIENT TEMPERATURE (DEG C)
AVERAGE OUTPUT SHAFT SPEED (RPM) ACTUAL
REFERRED
13482 1.8 6575 6598
14814 -0.2 6550 6564
12051 3.7 6494 6498
9874 10.8 6476 6490
5564 21.3 6572 6469
13479 4.2 6244 6377
4312 23.6 6418 6293
10215 10.6 6272 6288
8248 19.3 6154 6119
-100 19.4 6490 6351
-100 21.1 6600 6531
1100
1000
900
800
700
600
500
400
300
200
400
600
800
1000
1200
1400
1600
1800
2000
2200

FIGURE 64

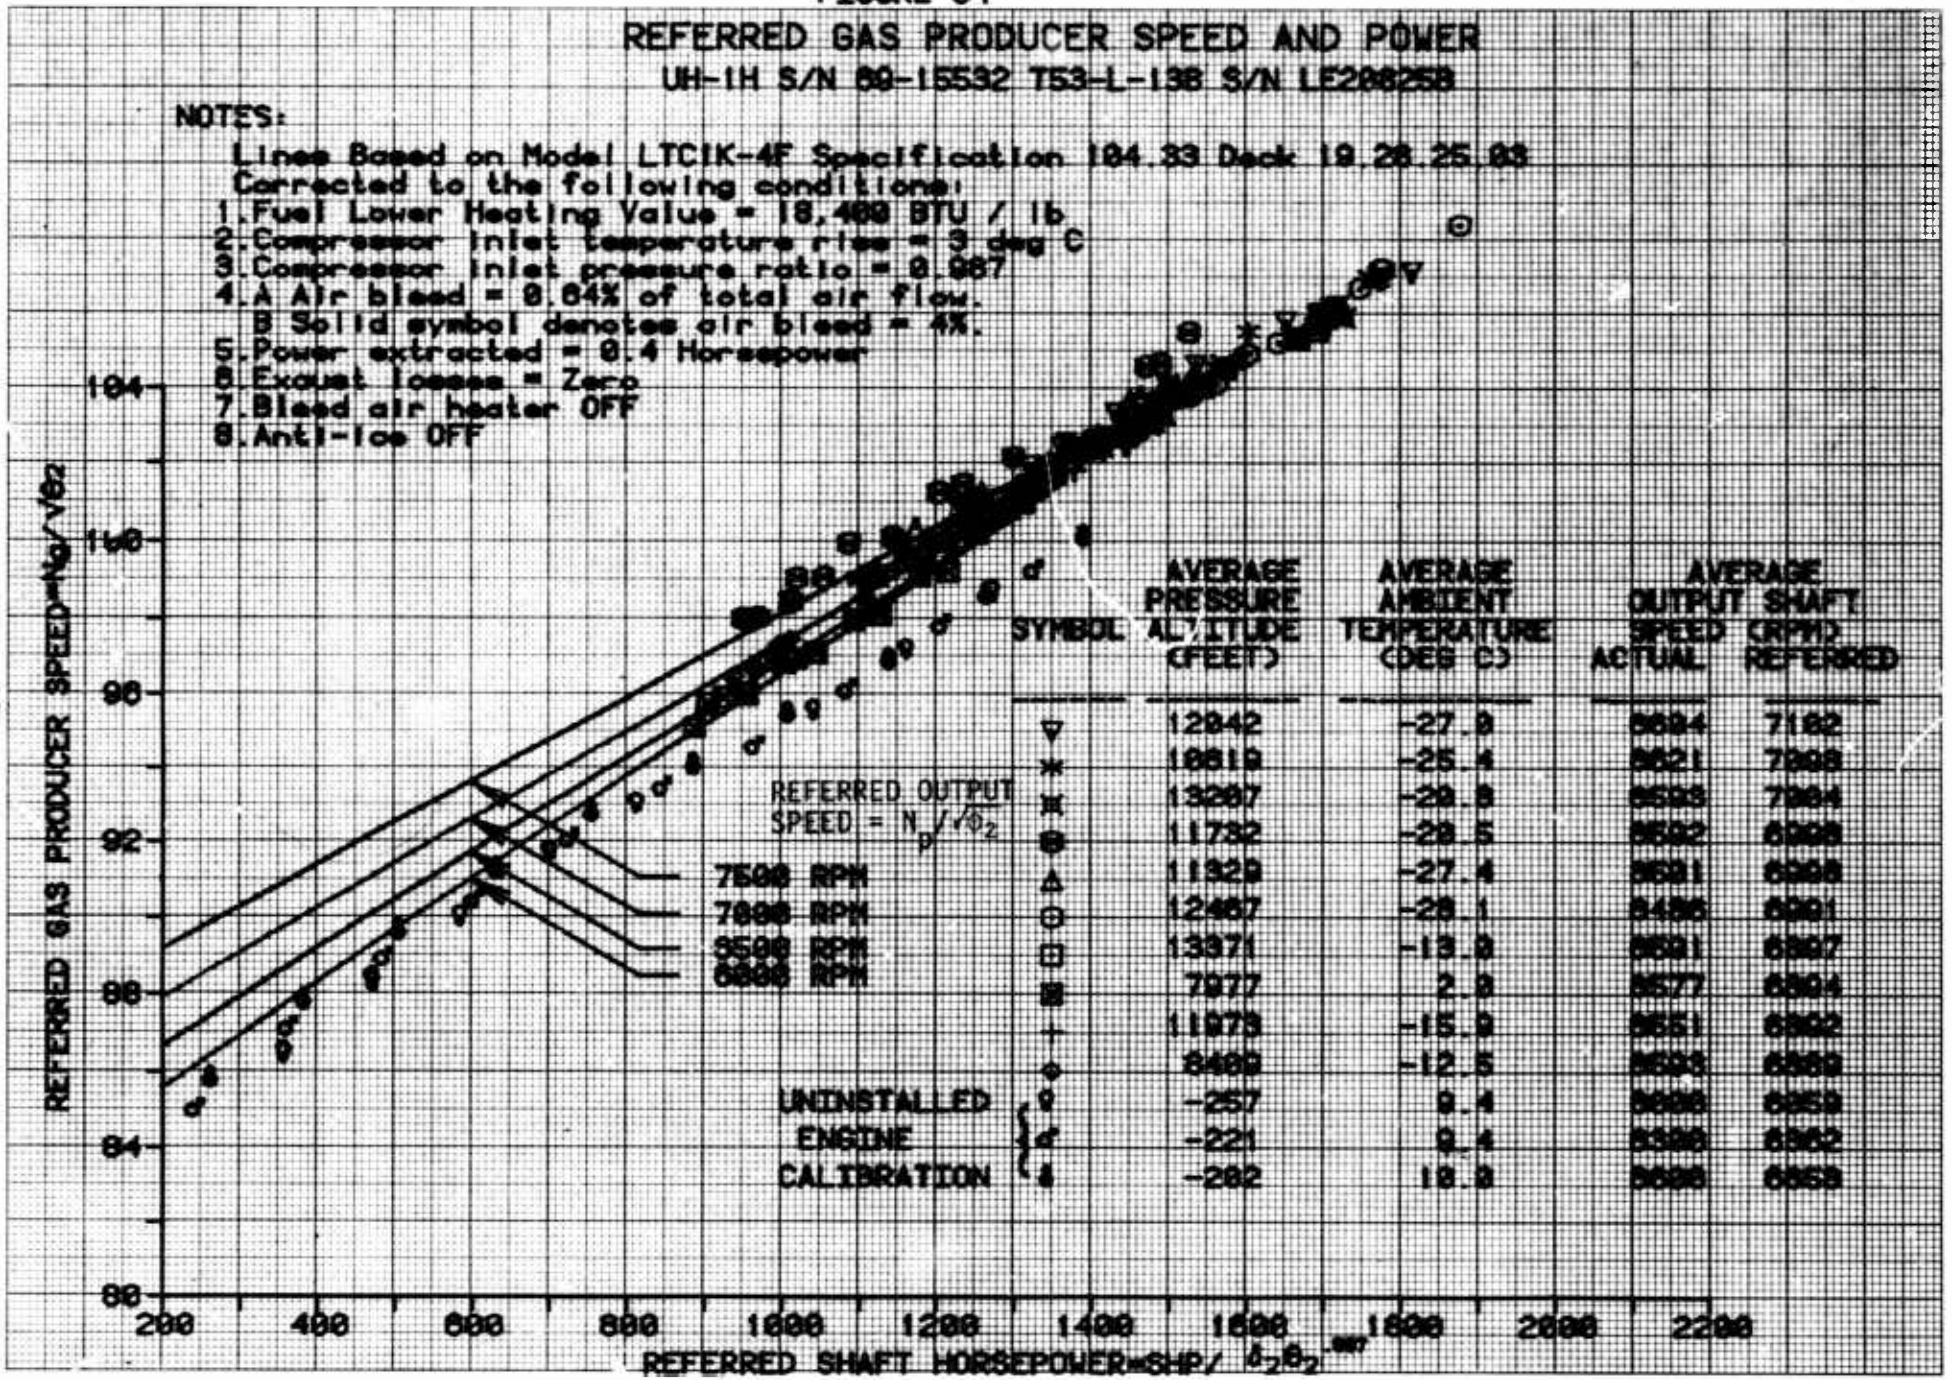

REFERRED GAS PRODUCER SPEED AND POWER
UH-1H S/N 68-15532 T53-L-13B S/N LE208258
NOTES:
Lines Based on Model LTCIK-4F Specification 104.33 Deck 19.28.25.03
Corrected to the following conditions:
1.Fuel Lower Heating Value = 18,400 BTU / lb
2.Compressor inlet temperature rise = 3 deg C
3.Compressor inlet pressure ratio = 0.987
4.A Air bleed = 0.04% of total air flow.
B Solid symbol denotes air bleed = 4%.
5.Power extracted = 0.4 Horsepower
6.Exaust losses = Zero
7.Bleed air heater OFF
8.Anti-Ice OFF
REFERRED GAS PRODUCER SPEED=Ng/√θ2
REFERRED SHAFT HORSEPOWER=SHP/ δ2θ2^3.7
REFERRED OUTPUT SPEED = Np/√θ2
7500 RPM
7000 RPM
6500 RPM
6000 RPM
UNINSTALLED ENGINE CALIBRATION
SYMBOL
AVERAGE PRESSURE ALTITUDE (FEET)
AVERAGE AMBIENT TEMPERATURE (DEG C)
AVERAGE OUTPUT SHAFT SPEED (RPM) ACTUAL
REFERRED
12842 -27.9 6694 7182
10819 -25.4 6621 7098
13287 -28.8 6593 7084
11732 -28.5 6582 6968
11929 -27.4 6591 6968
12467 -28.1 6496 6881
13371 -13.0 6691 6867
7977 2.8 6577 6864
11975 -15.9 6651 6862
8469 -12.5 6593 6859
-257 9.4 6698 6859
-221 9.4 6588 6862
-282 18.8 6698 6868
104
100
96
92
88
84
80
200
400
600
800
1000
1200
1400
1600
1800
2000
2200

FIGURE 65

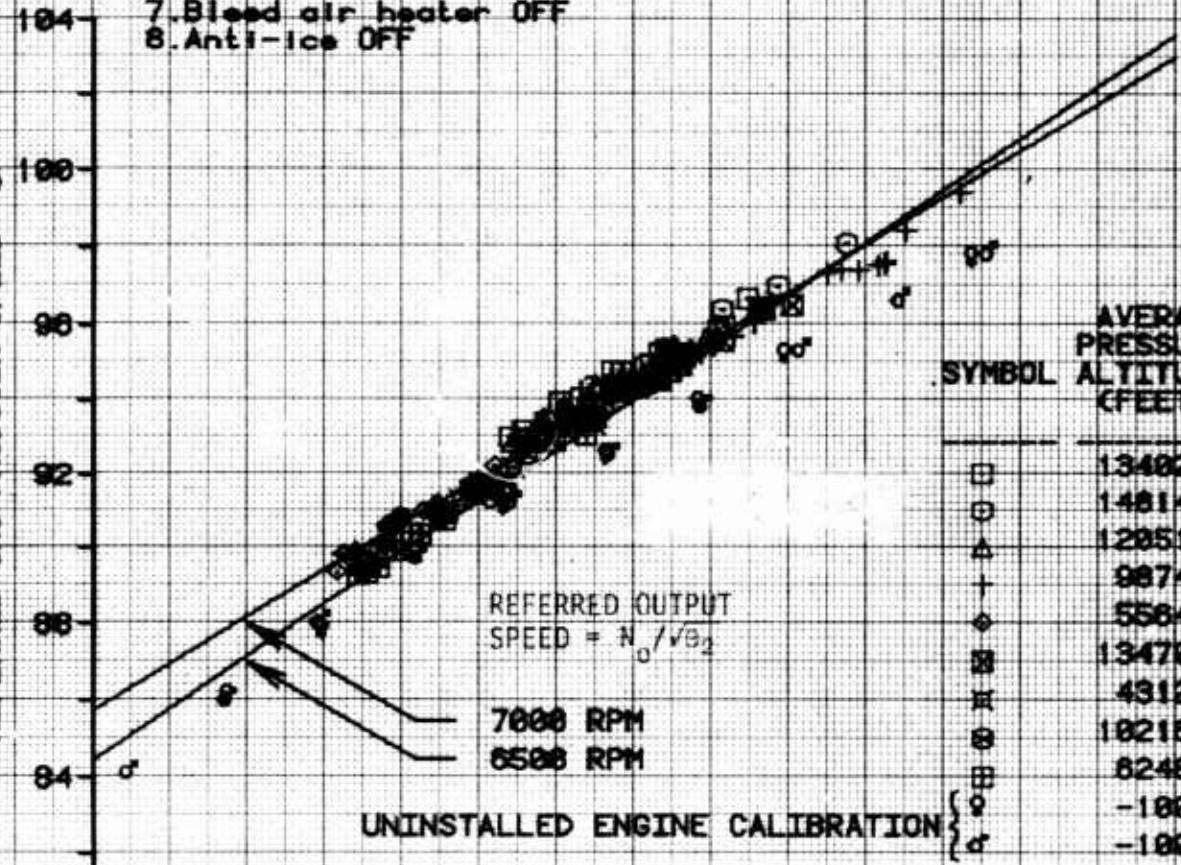
REFERRED GAS PRODUCER SPEED AND POWER

UH-1H S/N 69-15532 T53-L703 S/N LE09807Z

NOTES:

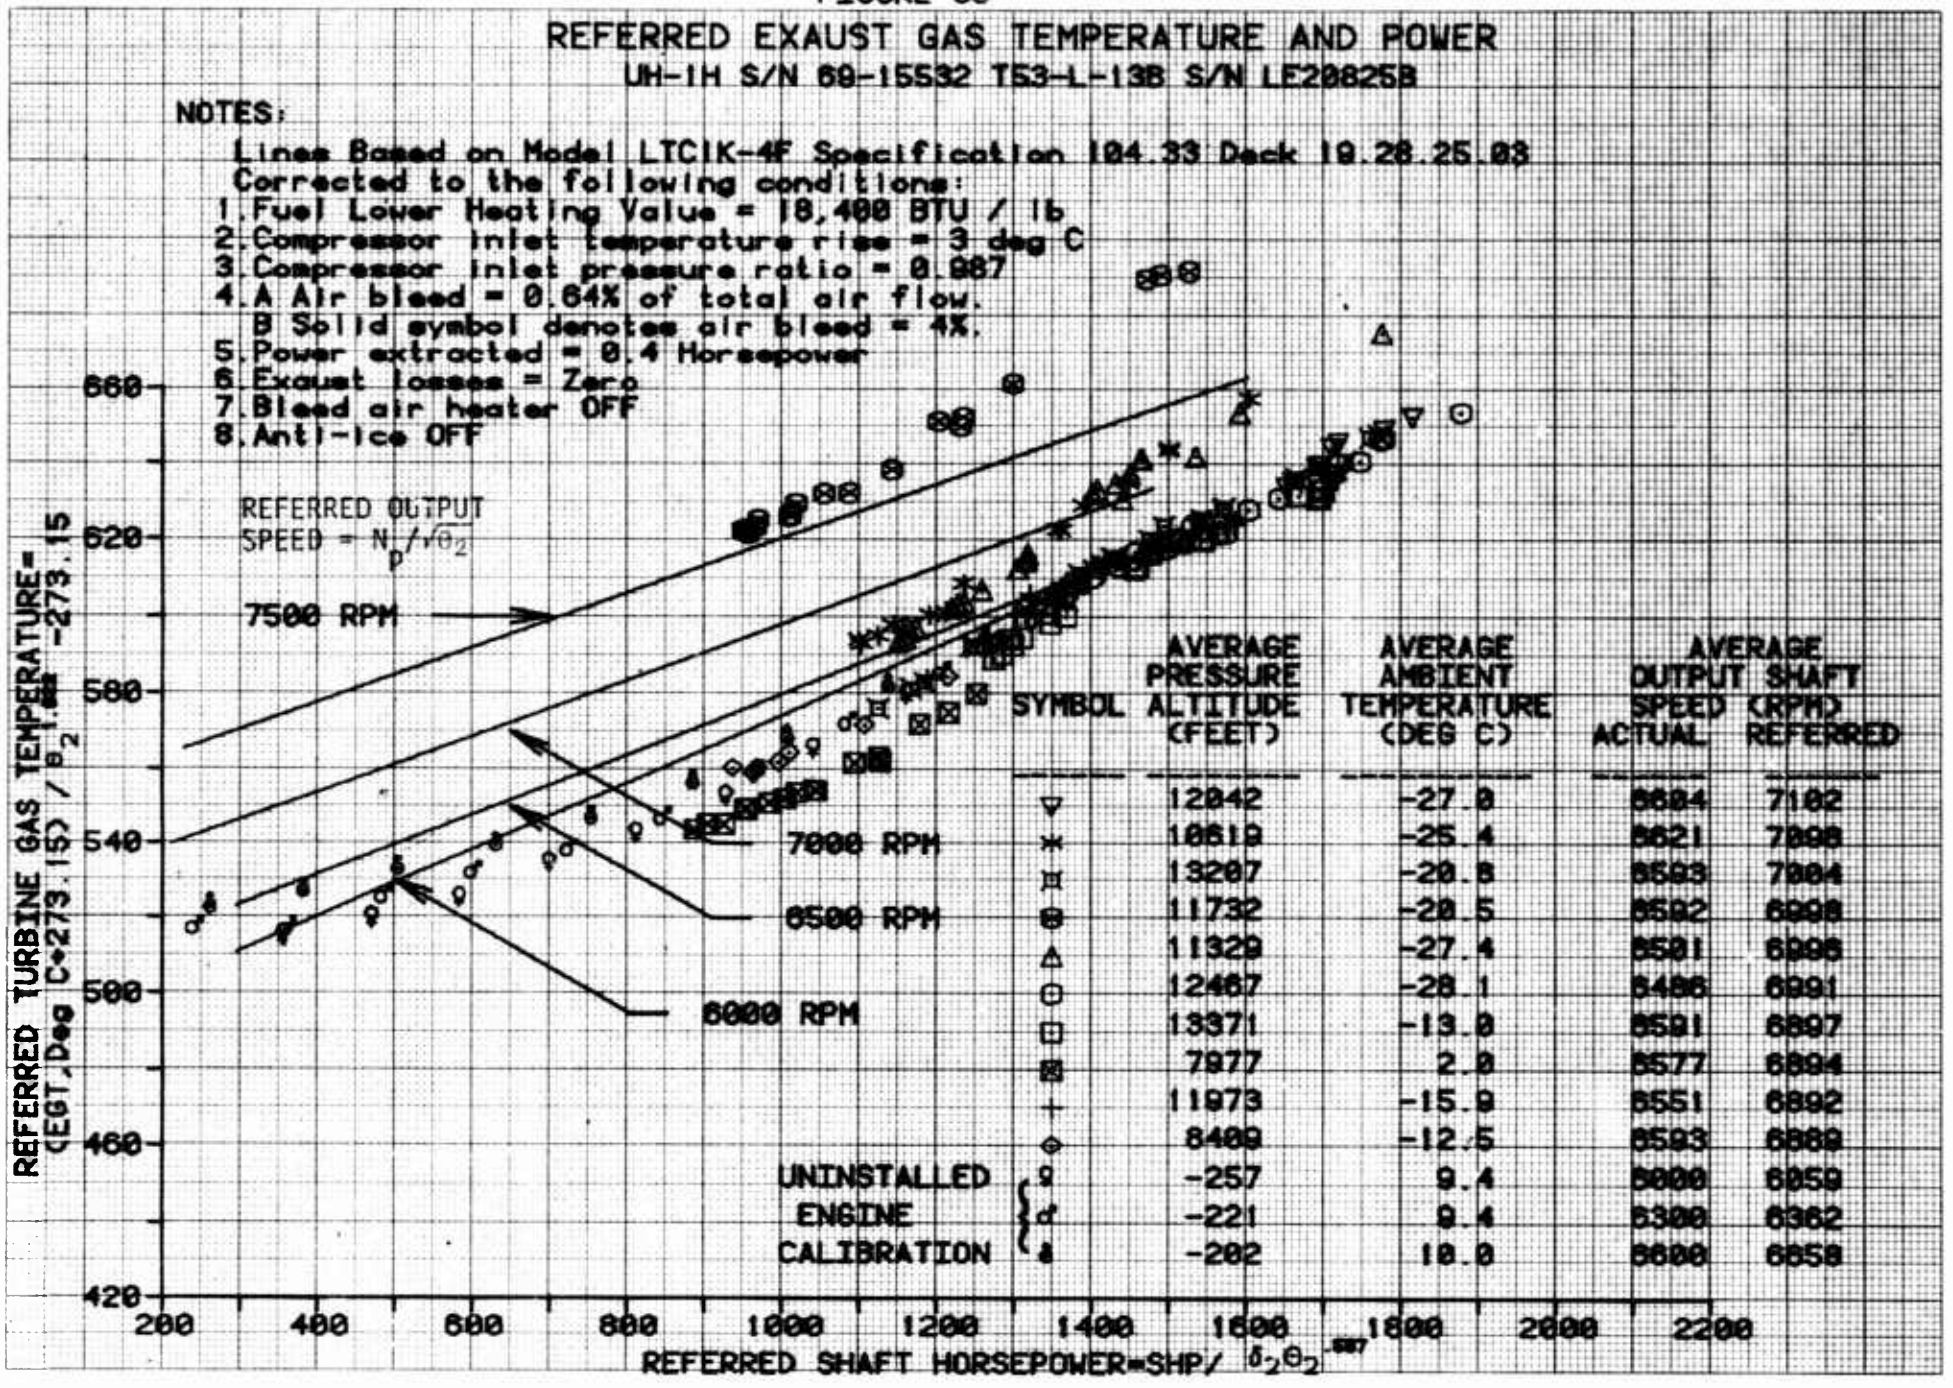
Lines Based on Model LTC1K-4G Specification 104.43 Deck 19.04.32.00
Corrected to the following conditions:

1. Fuel Lower Heating Value = 18,400 BTU / lb
2. Compressor inlet temperature rise = 9 deg C
3. Compressor inlet pressure ratio = 0.987
4. Air bleed = 0.64% of total air flow.
5. Power extracted = 0.4 Horsepower
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-Ice OFF



SYMBOL	AVERAGE PRESSURE ALTITUDE (FEET)	AVERAGE AMBIENT TEMPERATURE (DEG C)	AVERAGE OUTPUT SHAFT SPEED (RPM) ACTUAL	AVERAGE OUTPUT SHAFT SPEED (RPM) REFERRED
□	13402	1.8	6575	6696
⊕	14814	-0.2	6550	6684
△	12051	3.7	6484	6608
+	9874	10.8	6476	6609
◇	5564	21.3	6572	6669
⊠	13478	4.2	6284	6377
⋈	4312	23.6	6418	6293
⊗	10215	10.6	6272	6288
⊞	6248	19.3	6154	6119
♀	-100	19.4	6400	6351
♂	-100	21.1	6600	6531

FIGURE 66



SYMBOL	AVERAGE PRESSURE ALTITUDE (FEET)	AVERAGE AMBIENT TEMPERATURE (DEG C)	AVERAGE OUTPUT SHAFT SPEED (RPM) ACTUAL	REFERRED
▽	12042	-27.0	6684	7102
✳	10619	-25.4	6621	7098
▣	13207	-28.8	6593	7084
⊗	11732	-28.5	6582	6998
△	11329	-27.4	6581	6996
⊙	12467	-28.1	6486	6991
⊡	13371	-13.0	6591	6897
⊠	7977	2.0	6577	6894
+	11973	-15.9	6551	6892
◇	8409	-12.5	6593	6889
UNINSTALLED ENGINE CALIBRATION ♀	-257	9.4	6000	6059
UNINSTALLED ENGINE CALIBRATION ♂	-221	9.4	6300	6362
UNINSTALLED ENGINE CALIBRATION ♁	-202	10.0	6600	6659

FIGURE 67

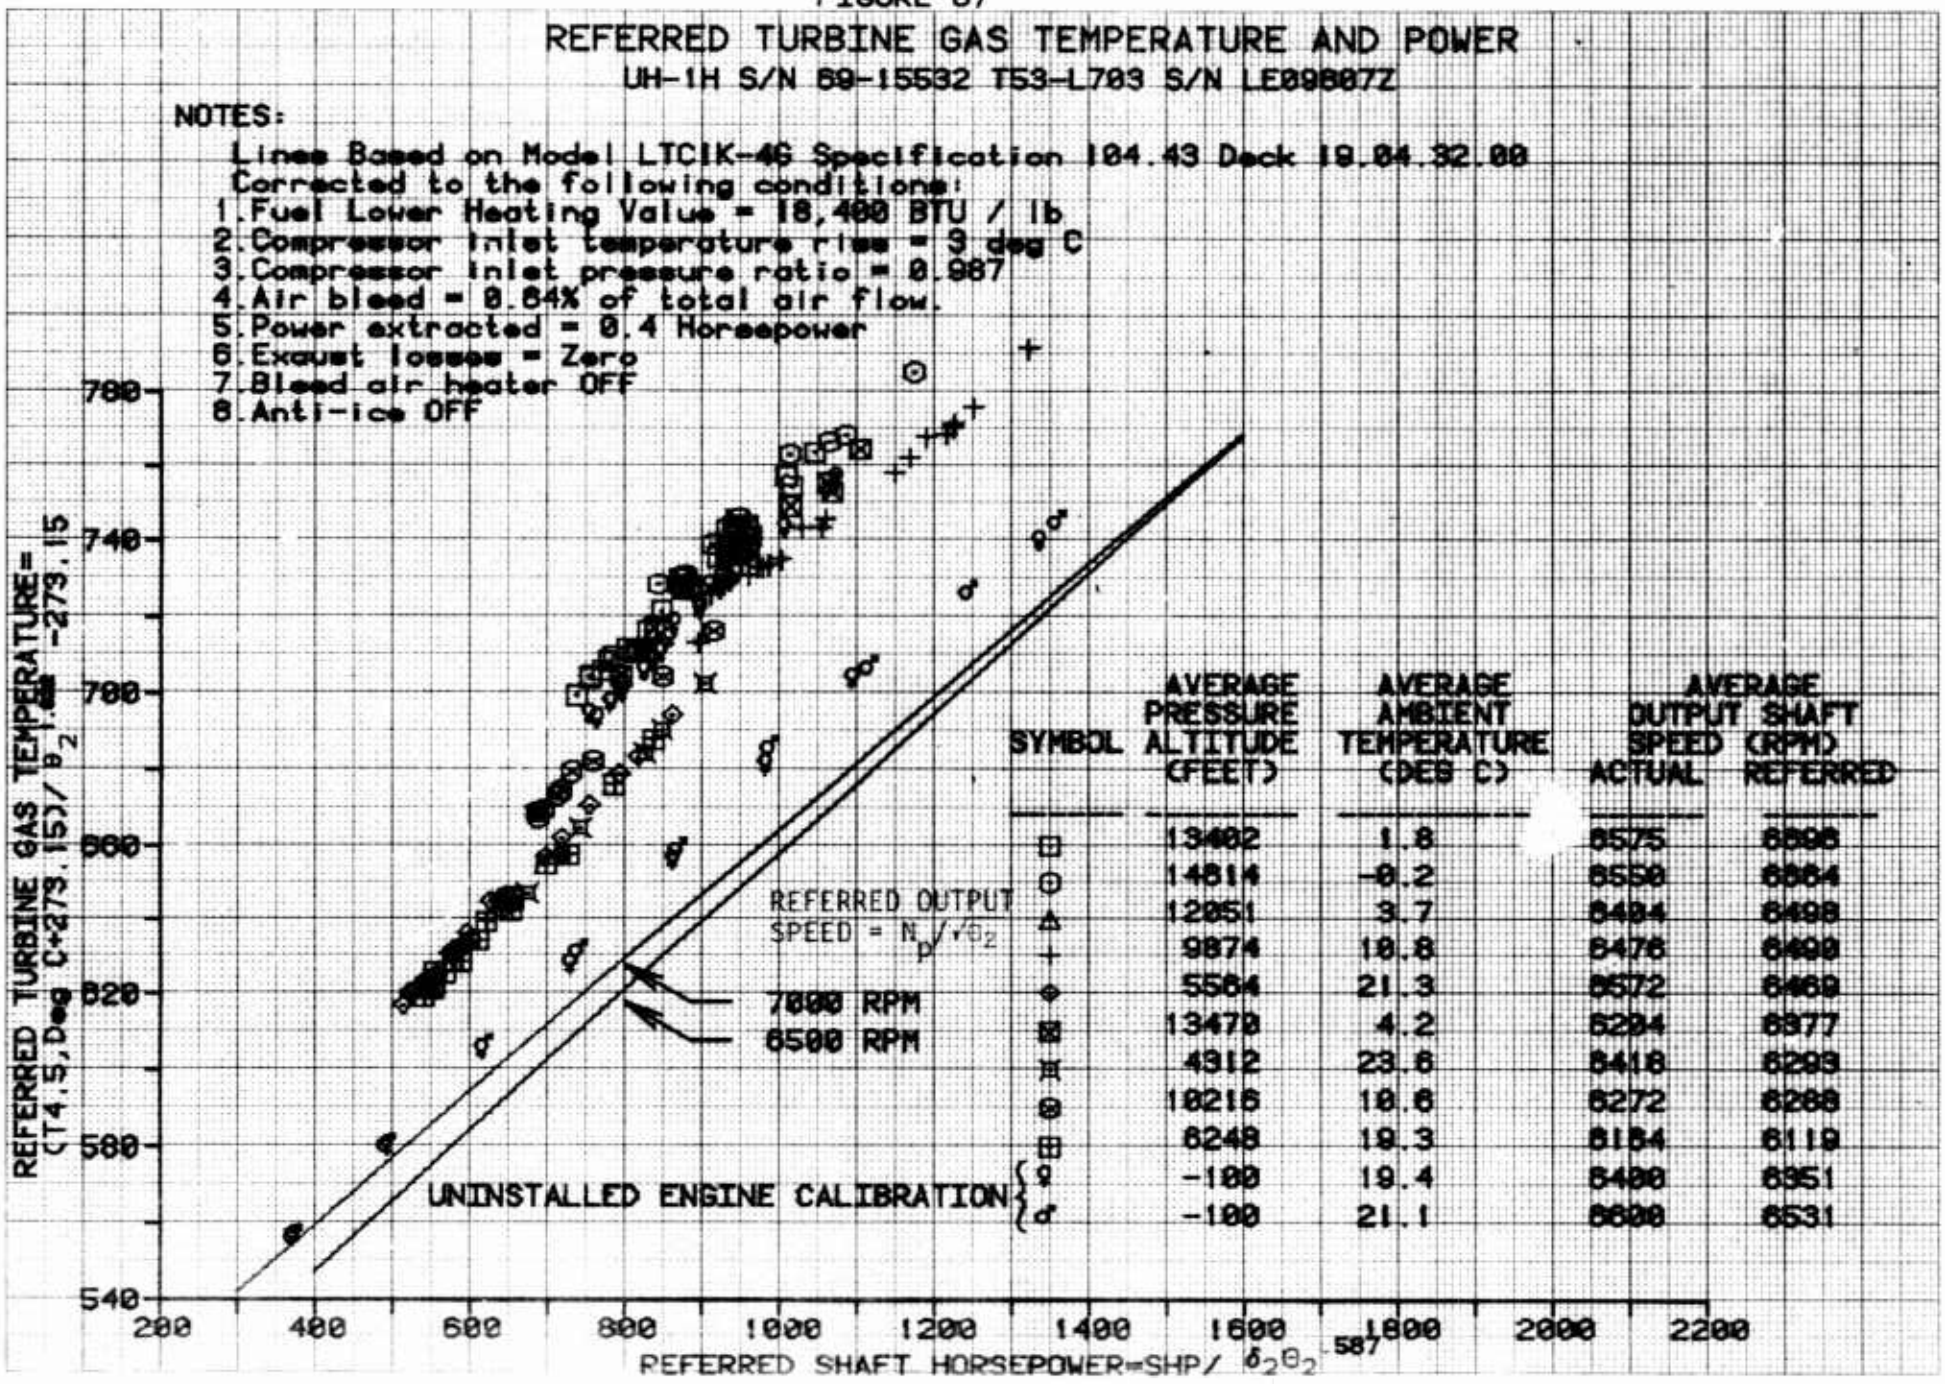
REFERRED TURBINE GAS TEMPERATURE AND POWER

UH-1H S/N 69-15532 T53-L703 S/N LE090807Z

NOTES:

Lines Based on Model LTCIK-4G Specification 104.43 Deck 19.84.32.00
Corrected to the following conditions:

1. Fuel Lower Heating Value = 18,400 BTU / lb
2. Compressor inlet temperature rise = 3 deg C
3. Compressor inlet pressure ratio = 0.987
4. Air bleed = 0.84% of total air flow.
5. Power extracted = 0.4 Horsepower
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-ice OFF



SYMBOL	AVERAGE PRESSURE ALTITUDE (FEET)	AVERAGE AMBIENT TEMPERATURE (DEG C)	AVERAGE OUTPUT SHAFT SPEED (RPM) ACTUAL	REFERRED
⊞	13402	1.8	6575	6698
⊕	14814	-0.2	6550	6664
△	12051	3.7	6484	6498
+	9874	10.8	6476	6490
◈	5584	21.3	6572	6469
⊠	13479	4.2	6294	6377
⊠	4312	23.6	6418	6293
⊗	10216	10.6	6272	6268
⊞	6248	19.3	6184	6119
♀	-100	19.4	6400	6351
♂	-100	21.1	6600	6531

FIGURE 68

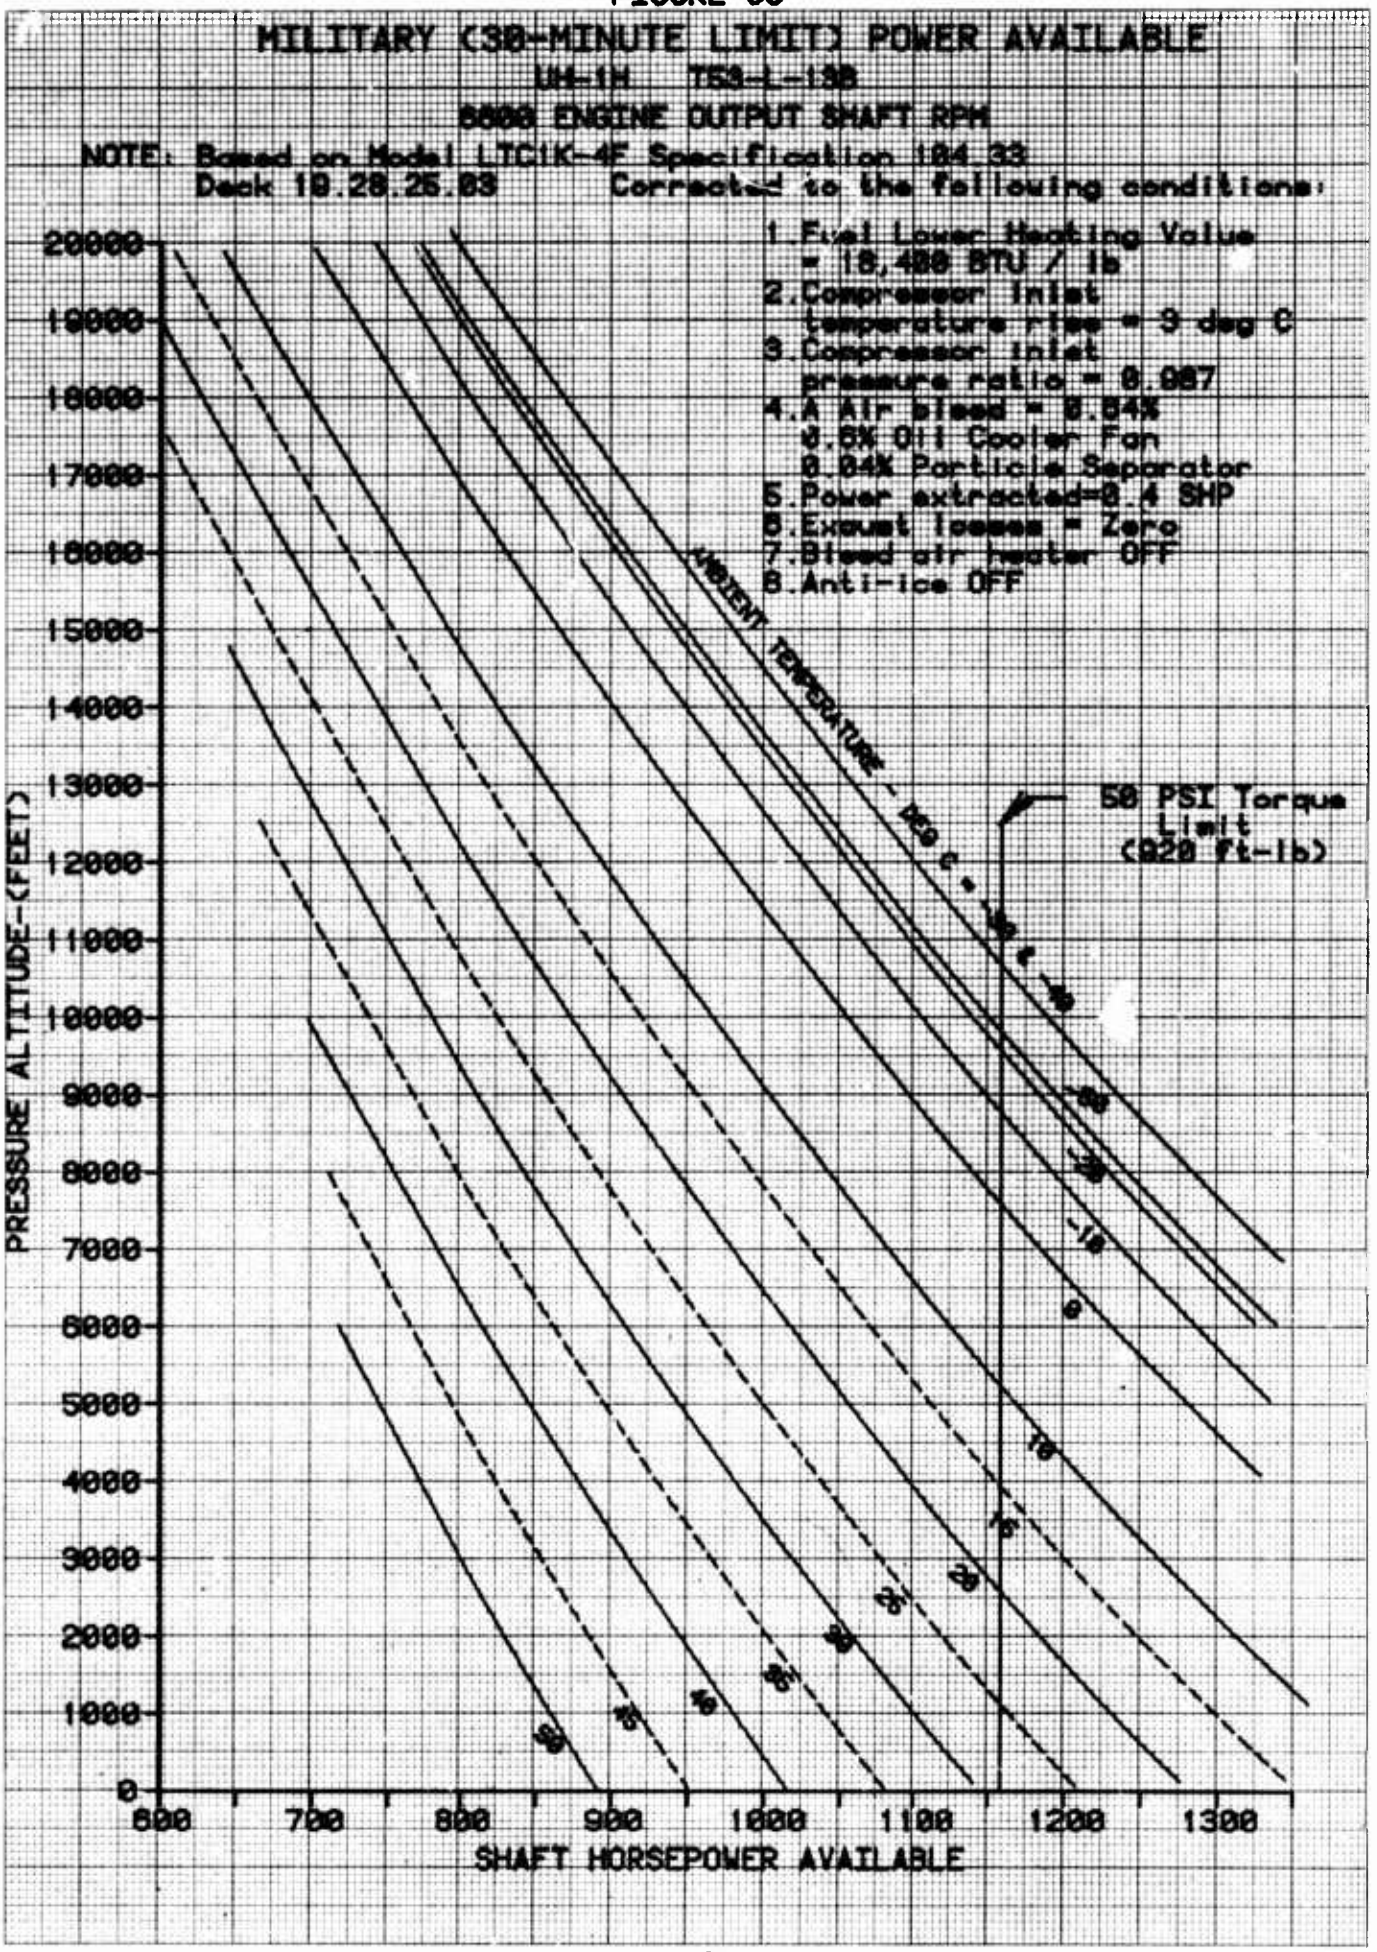

MILITARY (30-MINUTE LIMIT) POWER AVAILABLE
UH-1H T53-L-13B
6600 ENGINE OUTPUT SHAFT RPM
NOTE: Based on Model LTC1K-4F Specification 184.33 Deck 19.28.25.03 Corrected to the following conditions:
1. Fuel Lower Heating Value = 18,400 BTU / lb
2. Compressor Inlet temperature rise = 9 deg C
3. Compressor inlet pressure ratio = 0.987
4. A Air bleed = 0.84% 0.6% Oil Cooler Fan 0.04% Particle Separator
5. Power extracted=0.4 SHP
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-ice OFF
AMBIENT TEMPERATURE - DEG C
50 PSI Torque Limit (920 ft-lb)
PRESSURE ALTITUDE-(FEET)
SHAFT HORSEPOWER AVAILABLE

FIGURE 69

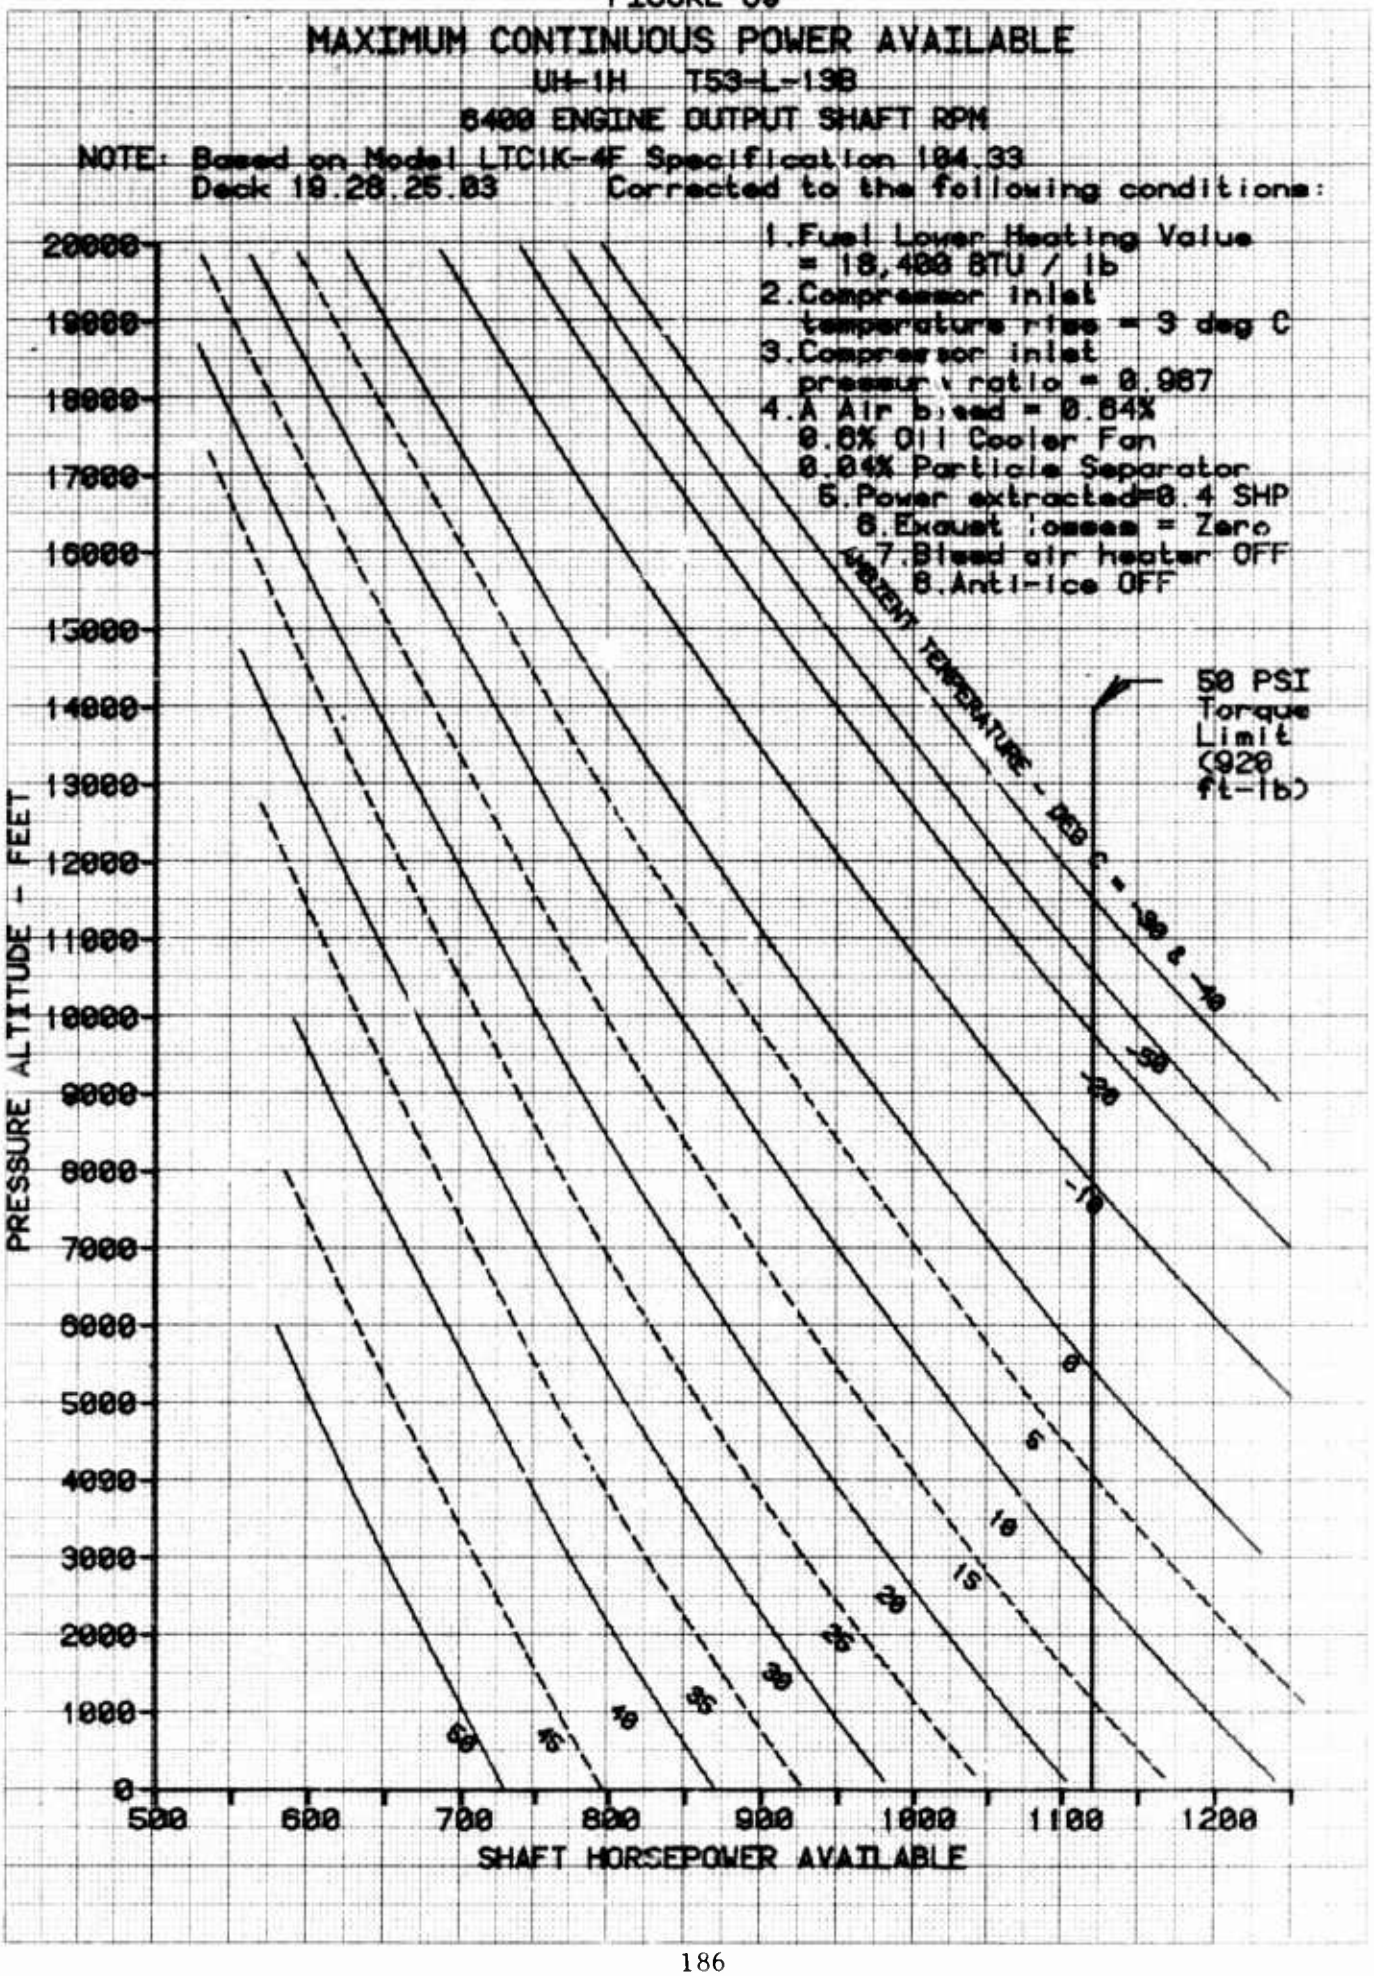

MAXIMUM CONTINUOUS POWER AVAILABLE
UH-1H T53-L-13B
6400 ENGINE OUTPUT SHAFT RPM
NOTE: Based on Model LTC1K-4F Specification 184.33
Deck 19.28.25.83 Corrected to the following conditions:
1.Fuel Lower Heating Value = 18,400 BTU / lb
2.Compressor inlet temperature rise = 3 deg C
3.Compressor inlet pressure ratio = 0.987
4.A Air bleed = 0.64%
0.6% Oil Cooler Fan
0.04% Particle Separator
5.Power extracted=0.4 SHP
6.Exaust losses = Zero
7.Bleed air heater OFF
8.Anti-ice OFF
AMBIENT TEMPERATURE - DEG C
50 PSI Torque Limit (920 ft-lb)
PRESSURE ALTITUDE - FEET
SHAFT HORSEPOWER AVAILABLE
20000
19000
18000
17000
16000
15000
14000
13000
12000
11000
10000
9000
8000
7000
6000
5000
4000
3000
2000
1000
0
500
600
700
800
900
1000
1100
1200

FIGURE 70

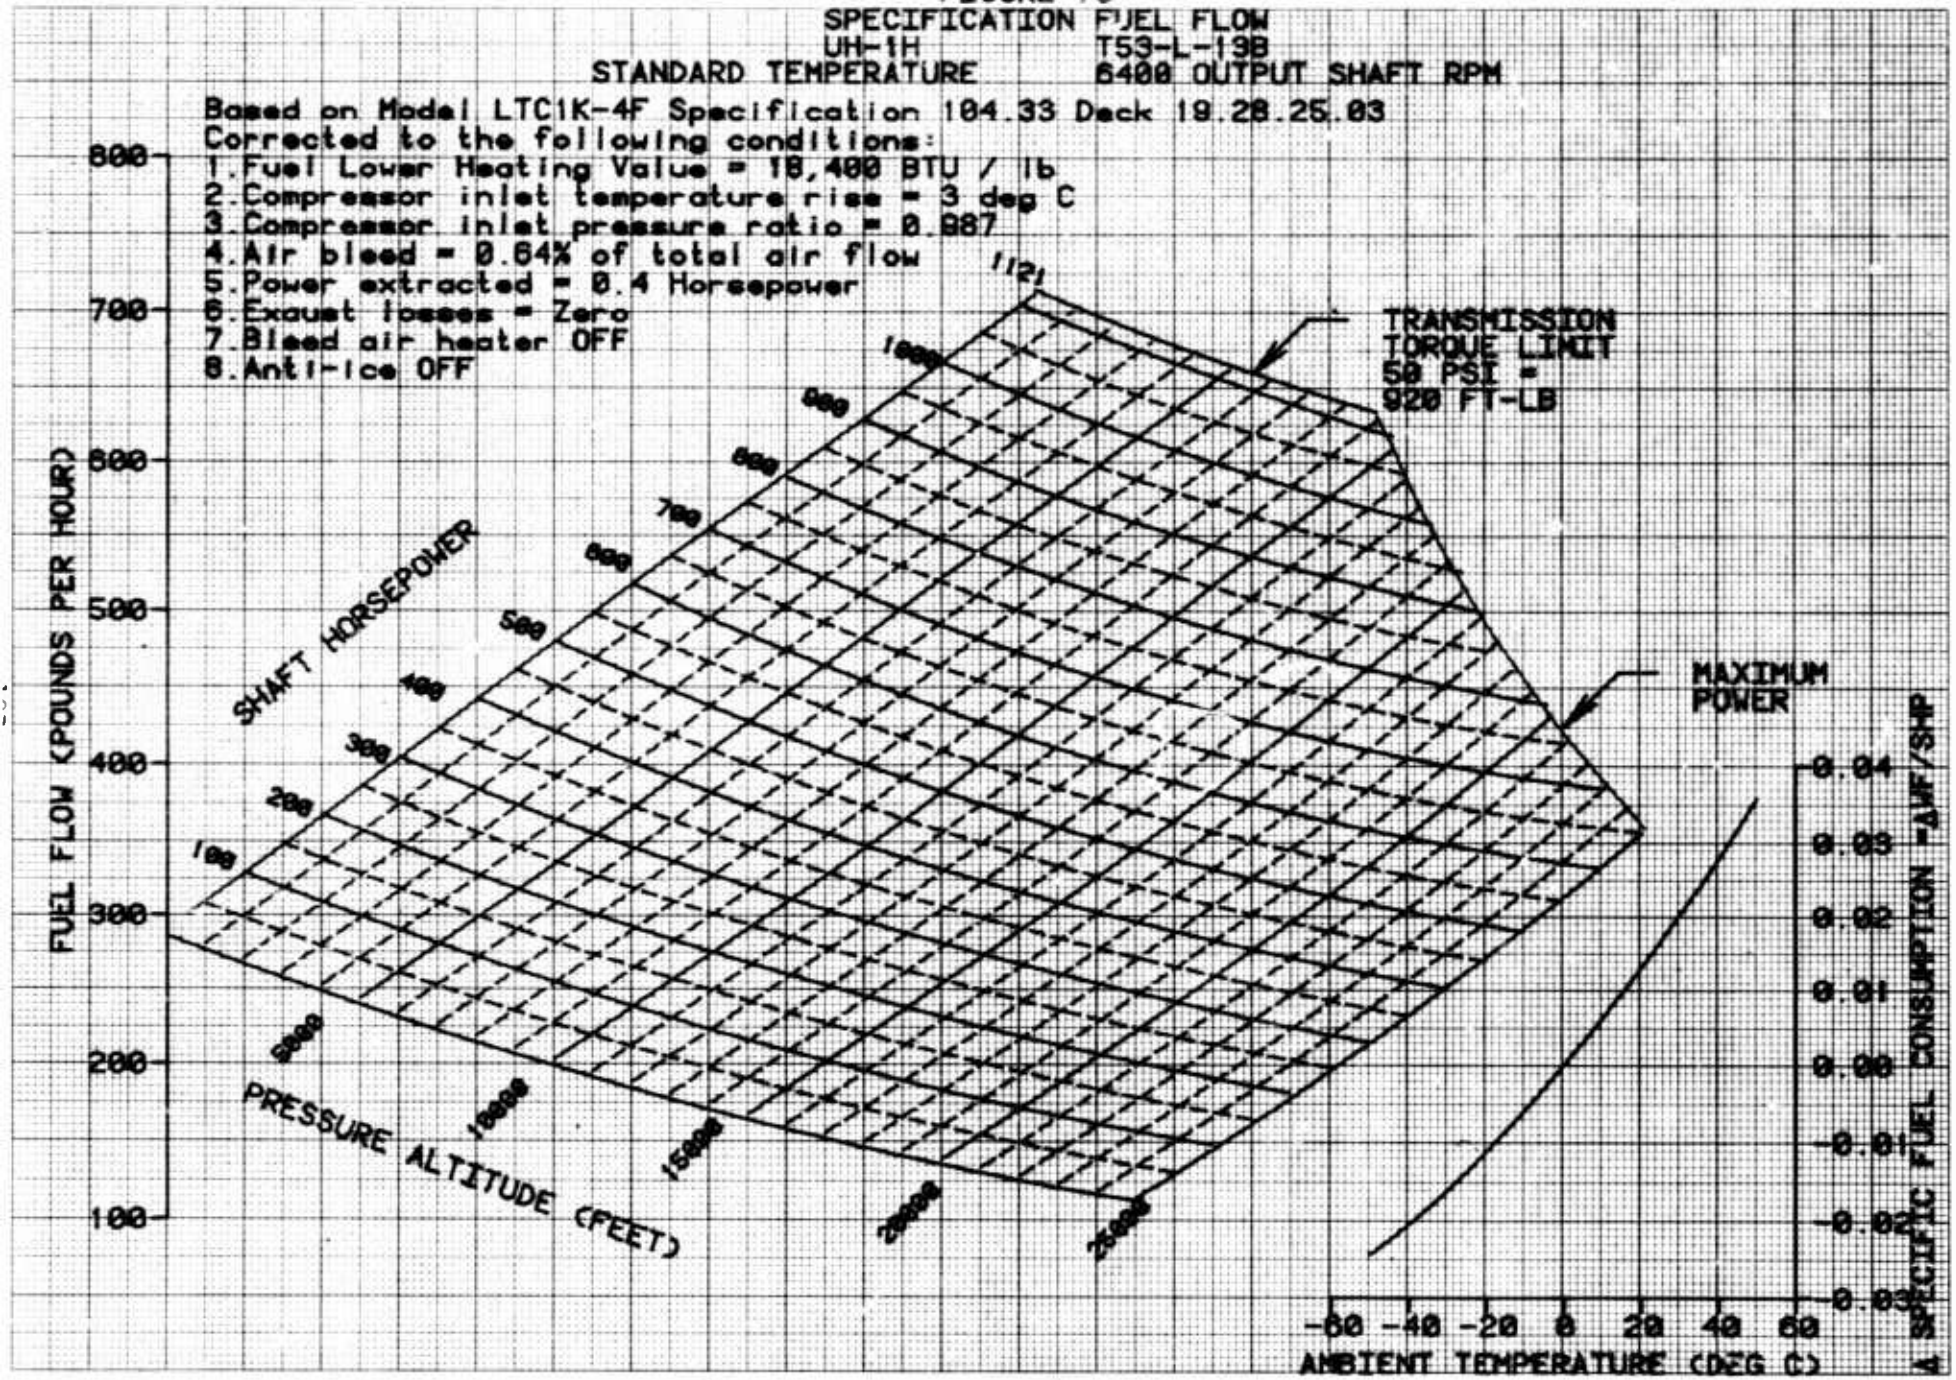

SPECIFICATION FUEL FLOW
UH-1H T53-L-13B
STANDARD TEMPERATURE 6400 OUTPUT SHAFT RPM
Based on Model LTC1K-4F Specification 104.33 Deck 19.28.25.03
Corrected to the following conditions:
1. Fuel Lower Heating Value = 18,400 BTU / lb
2. Compressor inlet temperature rise = 3 deg C
3. Compressor inlet pressure ratio = 0.987
4. Air bleed = 0.64% of total air flow
5. Power extracted = 0.4 Horsepower
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-Ice OFF
TRANSMISSION TORQUE LIMIT 50 PSI = 920 FT-LB
MAXIMUM POWER
SHAFT HORSEPOWER
FUEL FLOW (POUNDS PER HOUR)
PRESSURE ALTITUDE (FEET)
AMBIENT TEMPERATURE (DEG C)
SPECIFIC FUEL CONSUMPTION - ΔWF/SHP
800
700
600
500
400
300
200
100
0.04
0.03
0.02
0.01
0.00
-0.01
-0.02
-0.03
-60 -40 -20 0 20 40 60

FIGURE 71

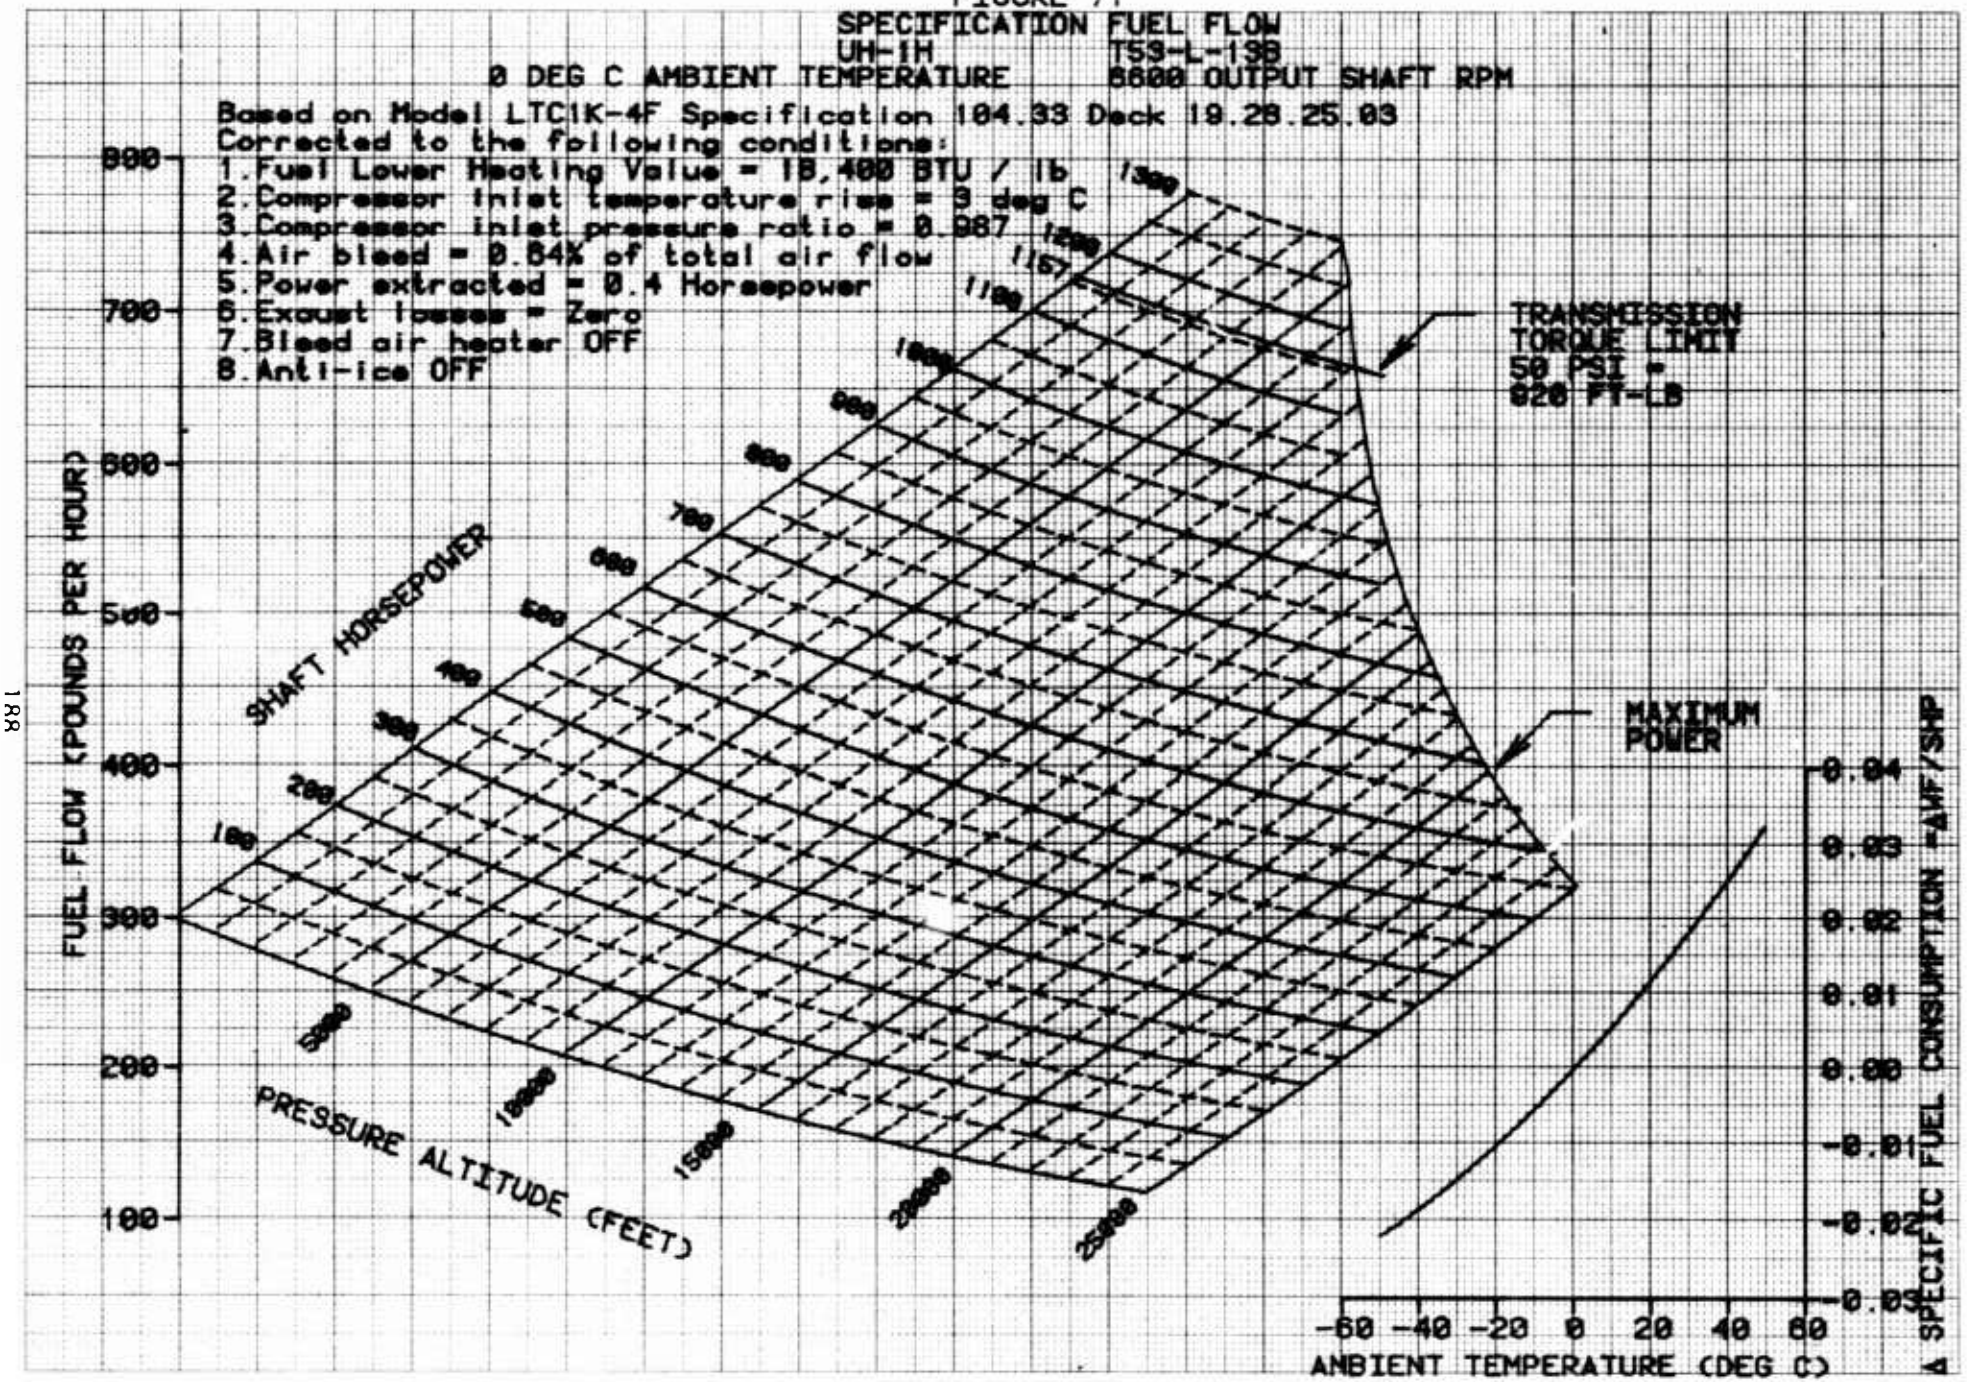

SPECIFICATION FUEL FLOW
UH-1H T53-L-13B
0 DEG C AMBIENT TEMPERATURE 6600 OUTPUT SHAFT RPM
Based on Model LTC1K-4F Specification 104.33 Deck 19.28.25.03
Corrected to the following conditions:
1. Fuel Lower Heating Value = 18,400 BTU / lb
2. Compressor inlet temperature rise = 9 deg C
3. Compressor inlet pressure ratio = 0.987
4. Air bleed = 0.84% of total air flow
5. Power extracted = 0.4 Horsepower
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-ice OFF
TRANSMISSION TORQUE LIMIT 50 PSI = 620 FT-LB
MAXIMUM POWER
SHAFT HORSEPOWER
PRESSURE ALTITUDE (FEET)
FUEL FLOW (POUNDS PER HOUR)
ANBIENT TEMPERATURE (DEG C)
SPECIFIC FUEL CONSUMPTION =AWF/SHP

FIGURE 72

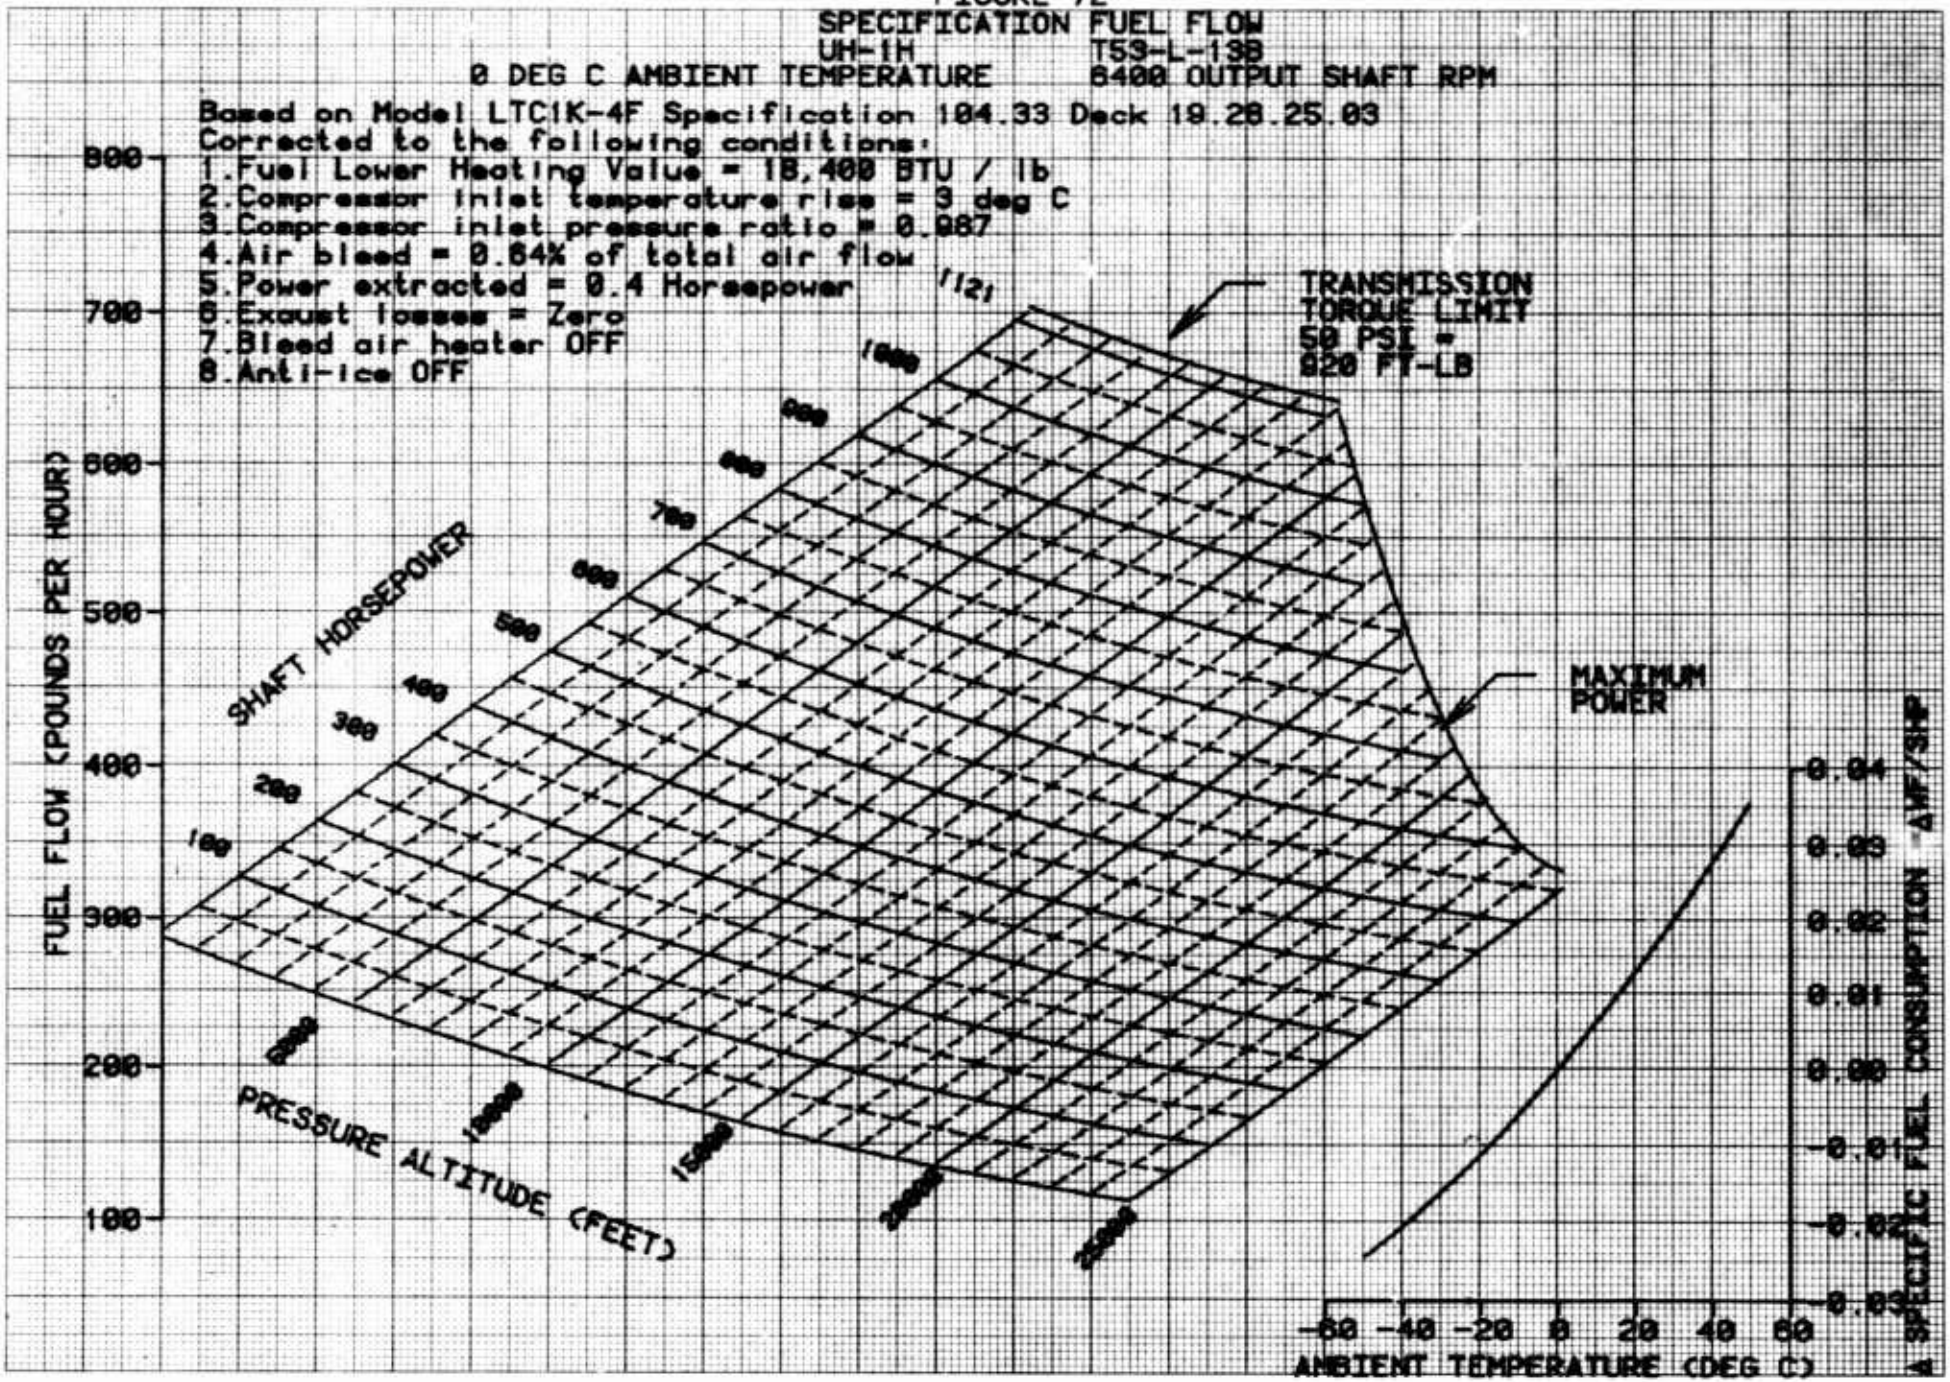

SPECIFICATION FUEL FLOW
UH-1H T53-L-13B
0 DEG C AMBIENT TEMPERATURE 6400 OUTPUT SHAFT RPM
Based on Model LTC1K-4F Specification 104.33 Deck 19.28.25.03
Corrected to the following conditions:
1.Fuel Lower Heating Value = 18,400 BTU / lb
2.Compressor inlet temperature rise = 3 deg C
3.Compressor inlet pressure ratio = 0.987
4.Air bleed = 0.64% of total air flow
5.Power extracted = 0.4 Horsepower
6.Exaust losses = Zero
7.Bleed air heater OFF
8.Anti-ice OFF
TRANSMISSION TORQUE LIMIT 50 PSI = 820 FT-LB
MAXIMUM POWER
SHAFT HORSEPOWER
FUEL FLOW (POUNDS PER HOUR)
PRESSURE ALTITUDE (FEET)
AMBIENT TEMPERATURE (DEG C)
SPECIFIC FUEL CONSUMPTION - ΔWF/SHP
800
700
600
500
400
300
200
100
-60 -40 -20 0 20 40 60
0.04
0.03
0.02
0.01
0.00
-0.01
-0.02
-0.03

FIGURE 73

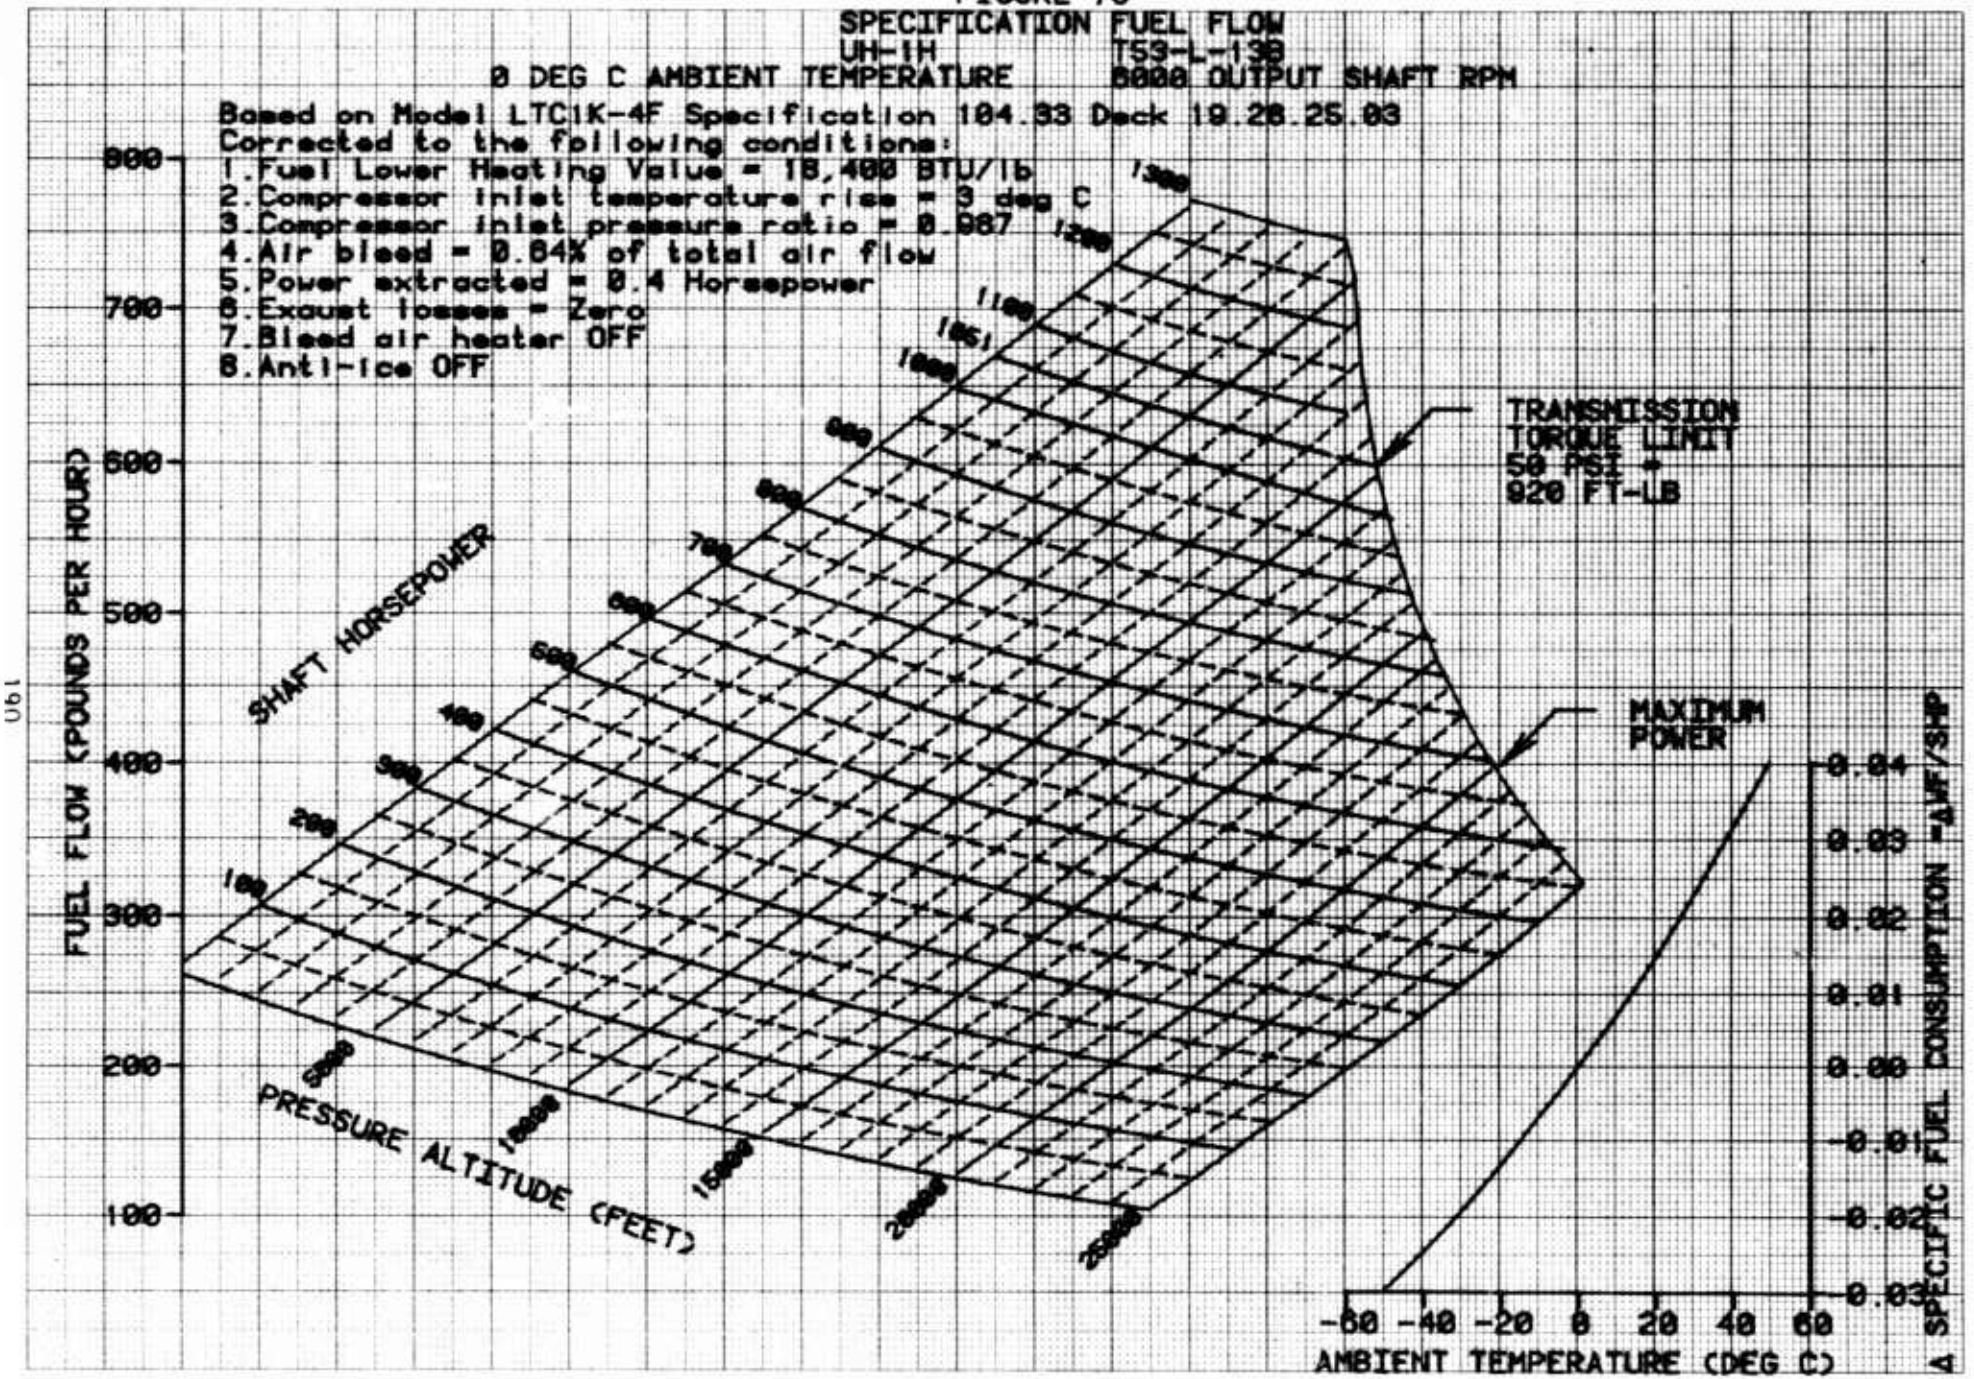

SPECIFICATION FUEL FLOW
UH-1H
T53-L-13B
0 DEG C AMBIENT TEMPERATURE
6000 OUTPUT SHAFT RPM
Based on Model LTC1K-4F Specification 104.33 Deck 19.28.25.03
Corrected to the following conditions:
1. Fuel Lower Heating Value = 18,400 BTU/lb
2. Compressor inlet temperature rise = 3 deg C
3. Compressor inlet pressure ratio = 0.987
4. Air bleed = 0.84% of total air flow
5. Power extracted = 0.4 Horsepower
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-ice OFF
TRANSMISSION TORQUE LIMIT 50 PSI = 920 FT-LB
MAXIMUM POWER
SHAFT HORSEPOWER
PRESSURE ALTITUDE (FEET)
FUEL FLOW (POUNDS PER HOUR)
AMBIENT TEMPERATURE (DEG C)
SPECIFIC FUEL CONSUMPTION = ΔWF/SHP
100
200
300
400
500
600
700
800
-60 -40 -20 0 20 40 60
0.04
0.03
0.02
0.01
0.00
-0.01
-0.02
-0.03

FIGURE 74

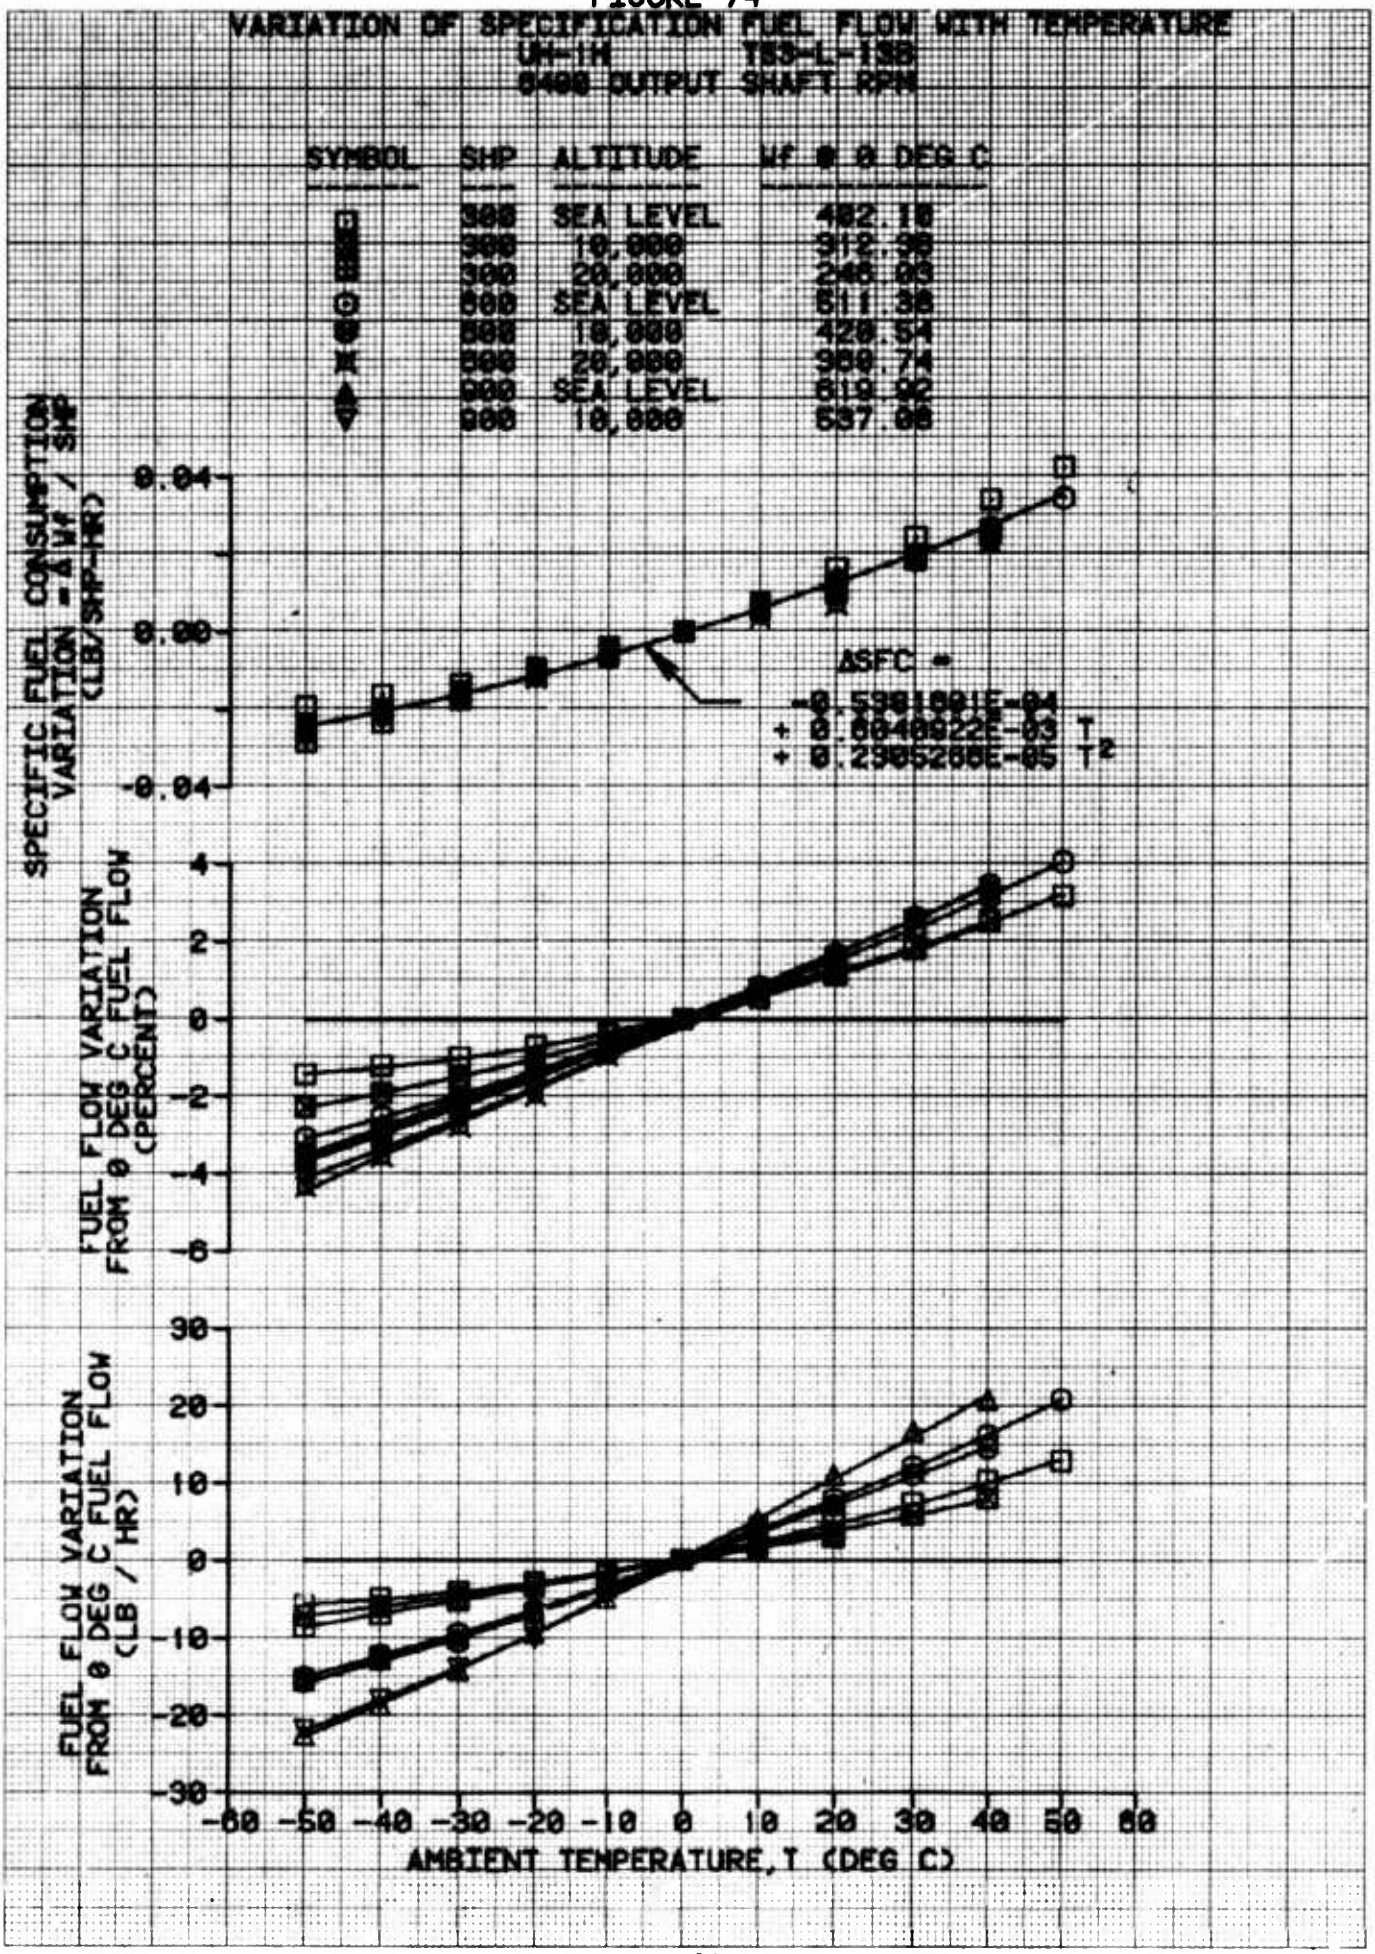

VARIATION OF SPECIFICATION FUEL FLOW WITH TEMPERATURE
UH-1H T53-L-13B
6400 OUTPUT SHAFT RPM
SYMBOL SHP ALTITUDE Wf @ 0 DEG C
300 SEA LEVEL 482.18
300 10,000 312.96
300 20,000 248.03
600 SEA LEVEL 611.38
600 10,000 428.54
600 20,000 309.74
900 SEA LEVEL 619.92
900 10,000 537.66
SPECIFIC FUEL CONSUMPTION VARIATION = Δ Wf / SHP (LB/SHP-HR)
0.04
0.00
-0.04
ΔSFC =
-0.5381881E-04
+ 0.8048822E-03 T
+ 0.2965288E-05 T²
FUEL FLOW VARIATION FROM 0 DEG C FUEL FLOW (PERCENT)
4
2
0
-2
-4
-6
FUEL FLOW VARIATION FROM 0 DEG C FUEL FLOW (LB / HR)
30
20
10
0
-10
-20
-30
-60 -50 -40 -30 -20 -10 0 10 20 30 40 50 60
AMBIENT TEMPERATURE, T (DEG C)

FIGURE 75

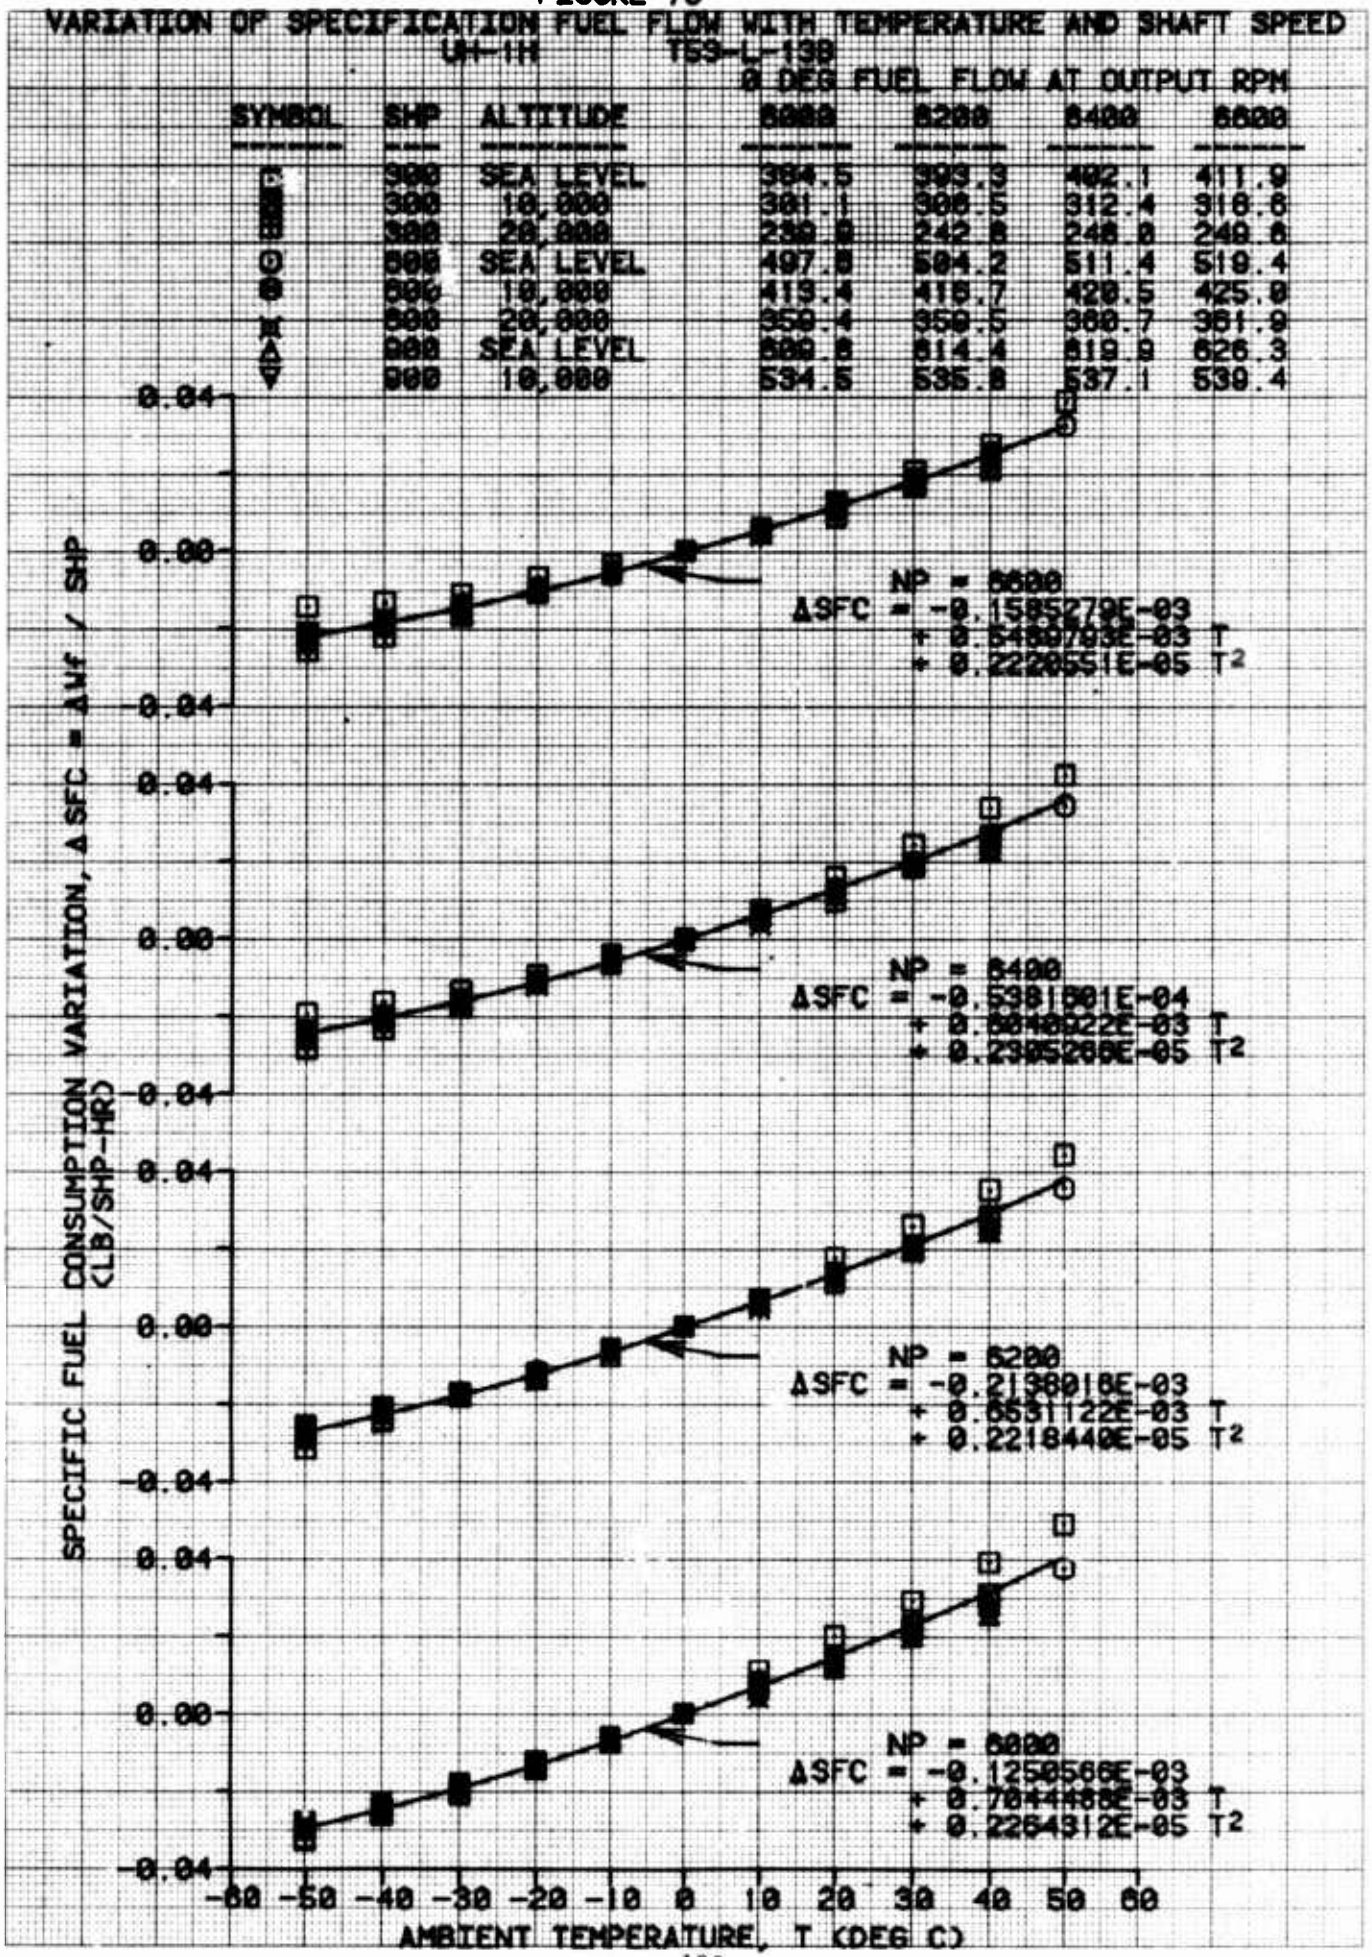

VARIATION OF SPECIFICATION FUEL FLOW WITH TEMPERATURE AND SHAFT SPEED
UH-1H T53-L-13B
0 DEG FUEL FLOW AT OUTPUT RPM
SYMBOL SHP ALTITUDE 6000 6200 6400 6600
900 SEA LEVEL 384.5 393.3 402.1 411.9
900 10,000 301.1 308.5 312.4 316.6
900 20,000 239.0 242.8 248.8 249.8
800 SEA LEVEL 497.8 504.2 511.4 519.4
800 10,000 413.4 418.7 420.5 425.9
800 20,000 359.4 359.5 368.7 381.9
900 SEA LEVEL 609.8 614.4 619.9 626.3
900 10,000 534.5 535.8 537.1 539.4
NP = 6600
ΔSFC = -0.1585279E-03
+ 0.5489703E-03 T
+ 0.2220551E-05 T²
NP = 6400
ΔSFC = -0.5381601E-04
+ 0.6048022E-03 T
+ 0.2305288E-05 T²
NP = 6200
ΔSFC = -0.2138018E-03
+ 0.6531122E-03 T
+ 0.2218440E-05 T²
NP = 6000
ΔSFC = -0.1250566E-03
+ 0.7044488E-03 T
+ 0.2264312E-05 T²
SPECIFIC FUEL CONSUMPTION VARIATION, ΔSFC = ΔWf / SHP (LB/SHP-HR)
0.04
0.00
-0.04
-60 -50 -40 -30 -20 -10 0 10 20 30 40 50 60
AMBIENT TEMPERATURE, T (DEG C)

FIGURE 76

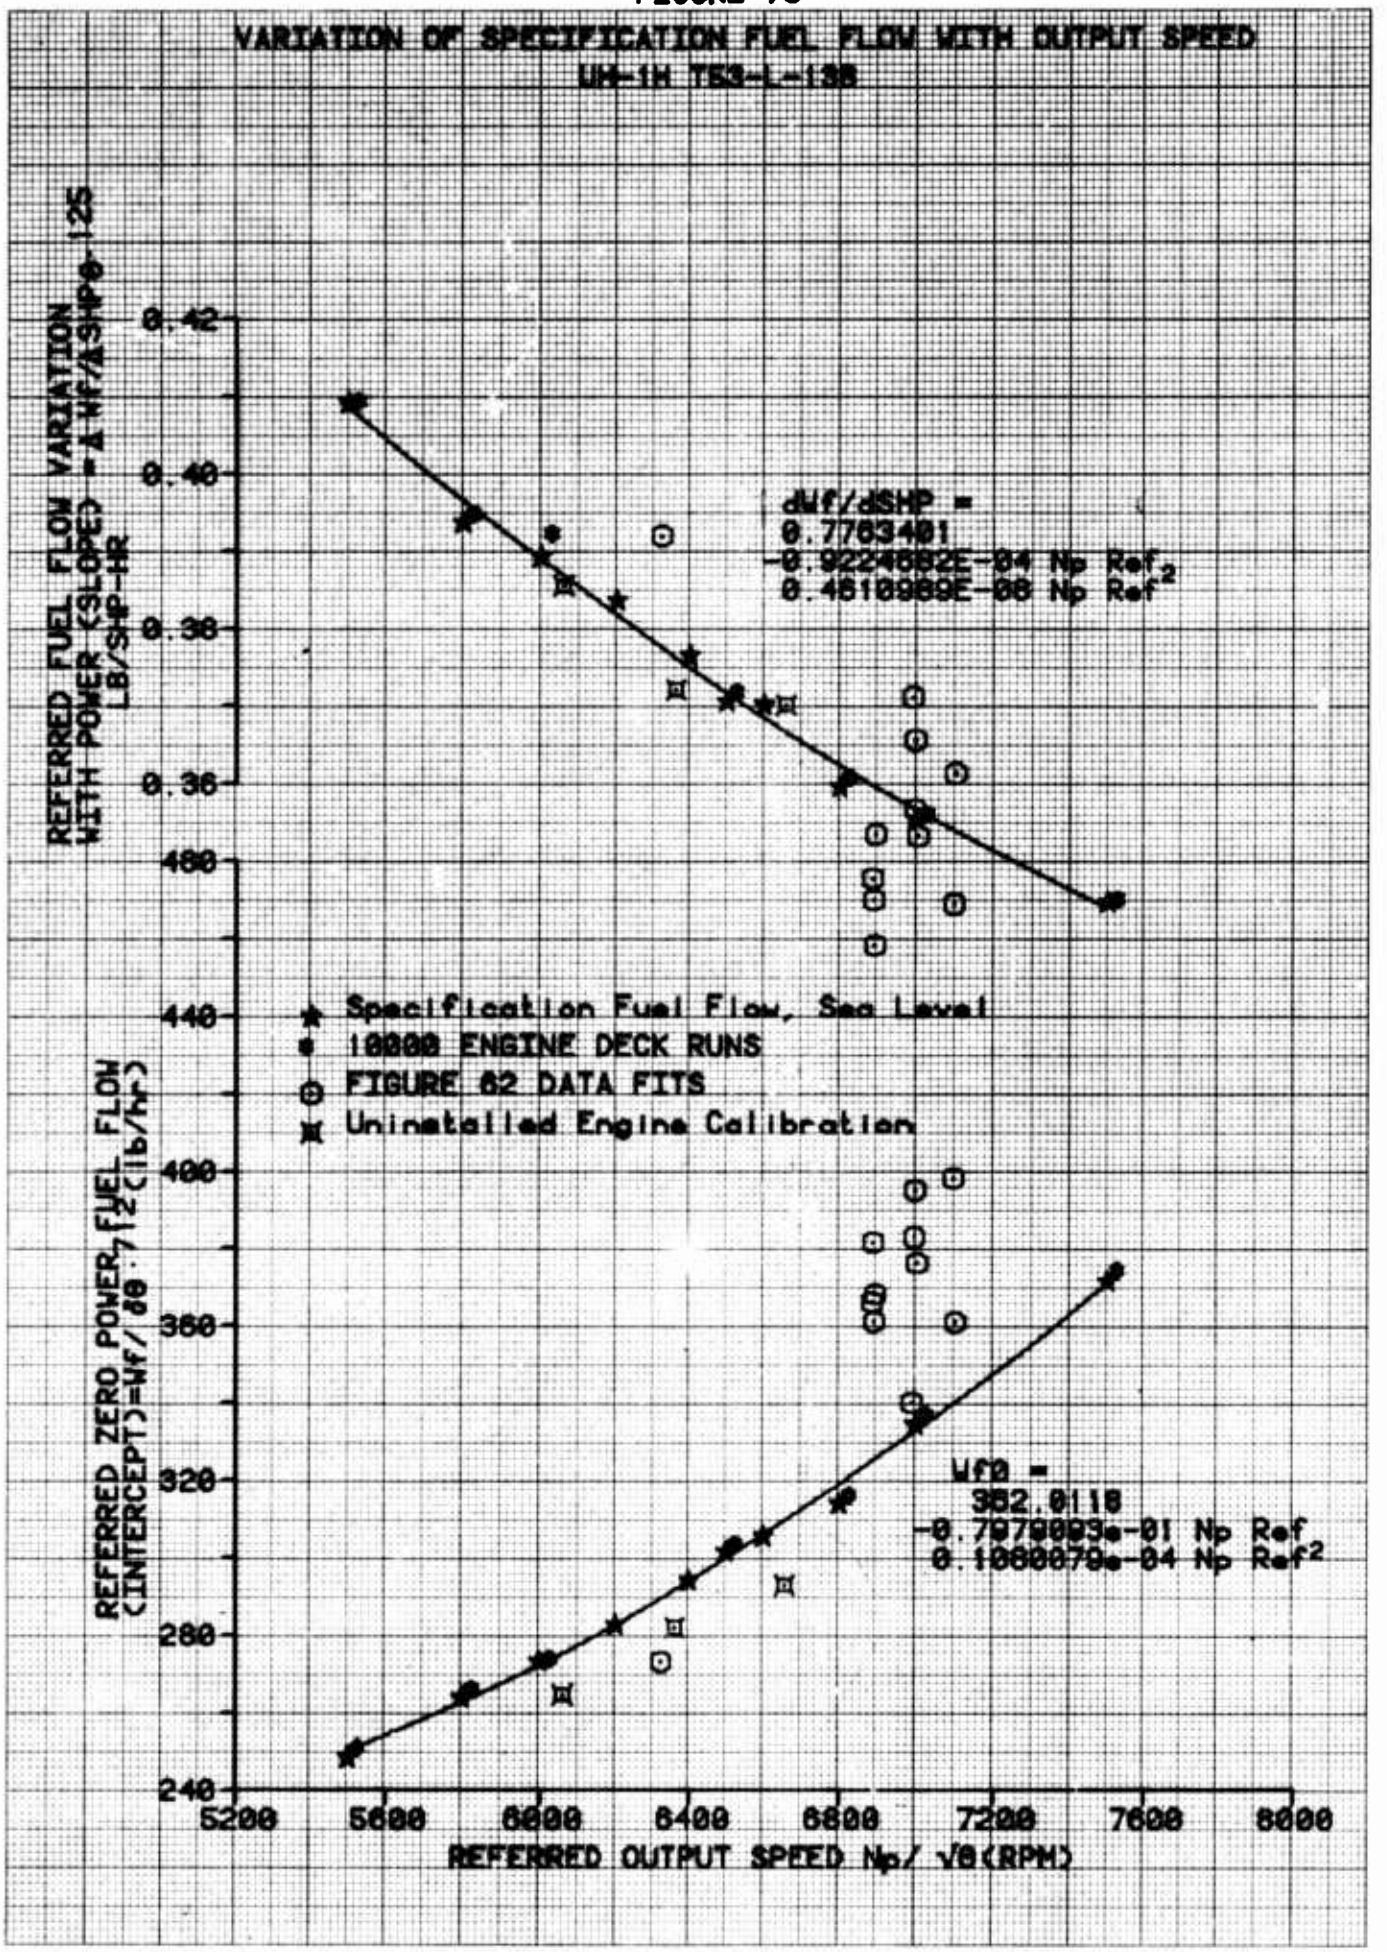

VARIATION OF SPECIFICATION FUEL FLOW WITH OUTPUT SPEED
UH-1H T53-L-13B
REFERRED FUEL FLOW VARIATION WITH POWER (SLOPE) = Δ Wf/ΔSHP@ 1.25 LB/SHP-HR
REFERRED ZERO POWER FUEL FLOW (INTERCEPT) = Wf/δ^0.7 2 (lb/hr)
REFERRED OUTPUT SPEED Np/ √θ (RPM)
dWf/dSHP =
0.7763401
-0.92246B2E-04 Np Ref
0.4B10989E-08 Np Ref²
Wf0 =
352.0118
-0.7979093e-01 Np Ref
0.1080079e-04 Np Ref²
Specification Fuel Flow, Sea Level
10000 ENGINE DECK RUNS
FIGURE 62 DATA FITS
Uninstalled Engine Calibration
0.42
0.40
0.38
0.36
480
440
400
360
320
280
240
5200
5600
6000
6400
6800
7200
7600
8000

FIGURE 77

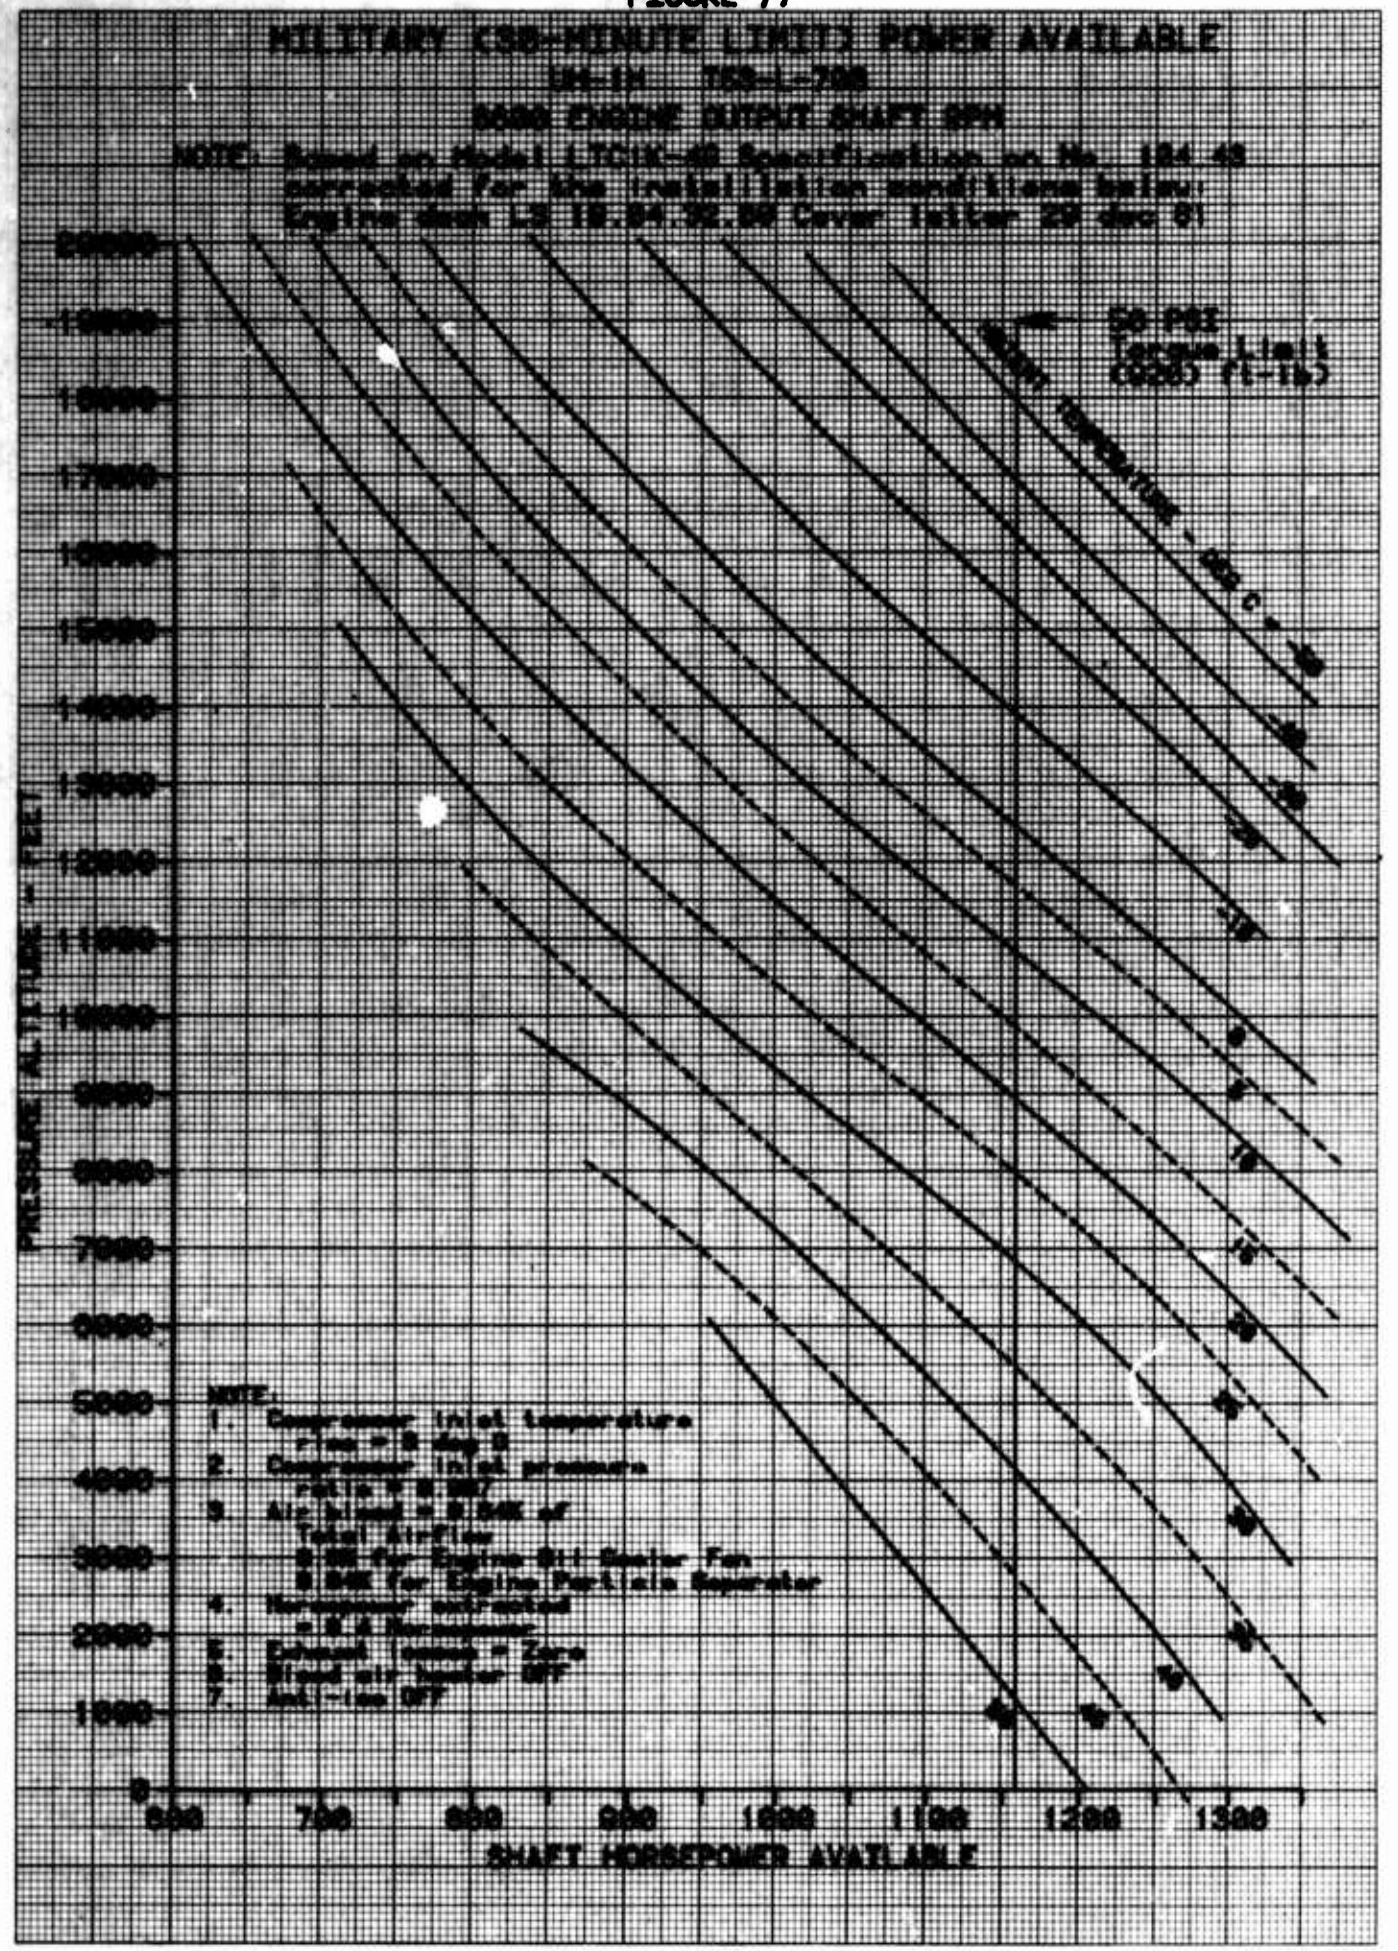

MILITARY (30-MINUTE LIMIT) POWER AVAILABLE
UH-1H T53-L-703
ENGINE OUTPUT SHAFT RPM
NOTE: Based on Model LTC1K-4B Specification no. No. 104-48
Corrected for the installation conditions below:
Engine deck Lg 19.84.32.00 Cover letter 29 Dec 81
SHAFT HORSEPOWER AVAILABLE
NOTE:
1. Compressor inlet temperature
2. Compressor inlet pressure
3. Air bleed
Total Air-flow
for Engine Oil Cooler Fan
for Engine Particle Separator
4. Horsepower extracted
5. Exhaust losses
6. Bleed air Heater OFF
7. Anti-Ice OFF

FIGURE 78

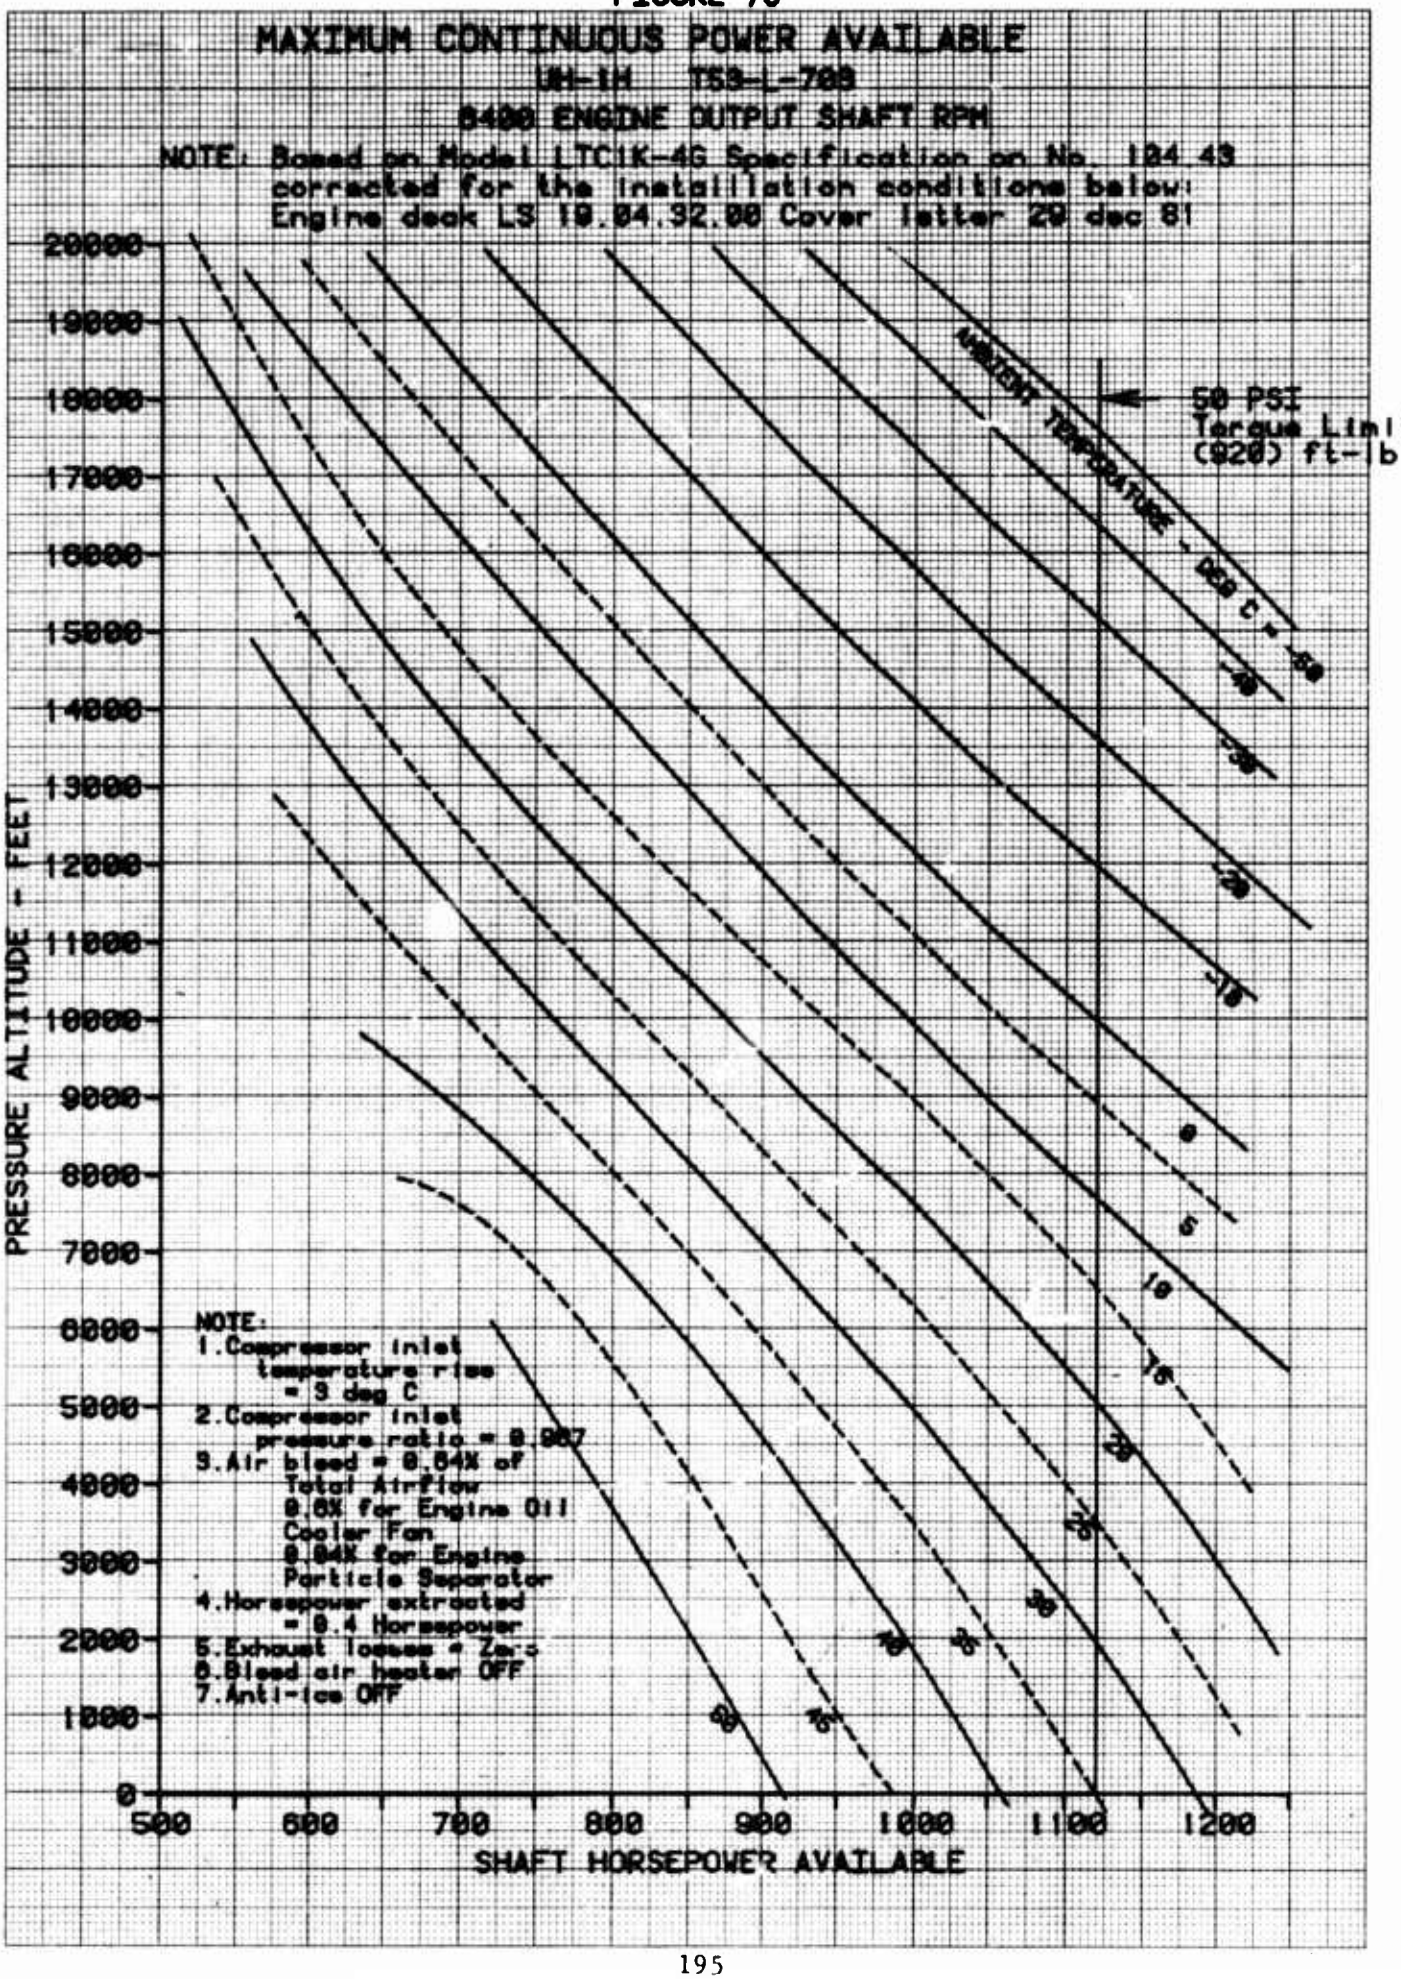

MAXIMUM CONTINUOUS POWER AVAILABLE
UH-1H T53-L-703
6400 ENGINE OUTPUT SHAFT RPM
NOTE: Based on Model LTC1K-4G Specification on No. 104.43 corrected for the installation conditions below: Engine deck LS 19.84.32.00 Cover letter 20 dec 81
50 PSI Torque Limit (920) ft-lb
AMBIENT TEMPERATURE - DEG C
PRESSURE ALTITUDE - FEET
SHAFT HORSEPOWER AVAILABLE
NOTE:
1. Compressor inlet temperature rise = 3 deg C
2. Compressor inlet pressure ratio = 0.987
3. Air bleed = 0.64% of Total Airflow 0.6% for Engine Oil Cooler Fan 0.04% for Engine Particle Separator
4. Horsepower extracted = 0.4 Horsepower
5. Exhaust losses = Zero
6. Bleed air heater OFF
7. Anti-ice OFF

FIGURE 79

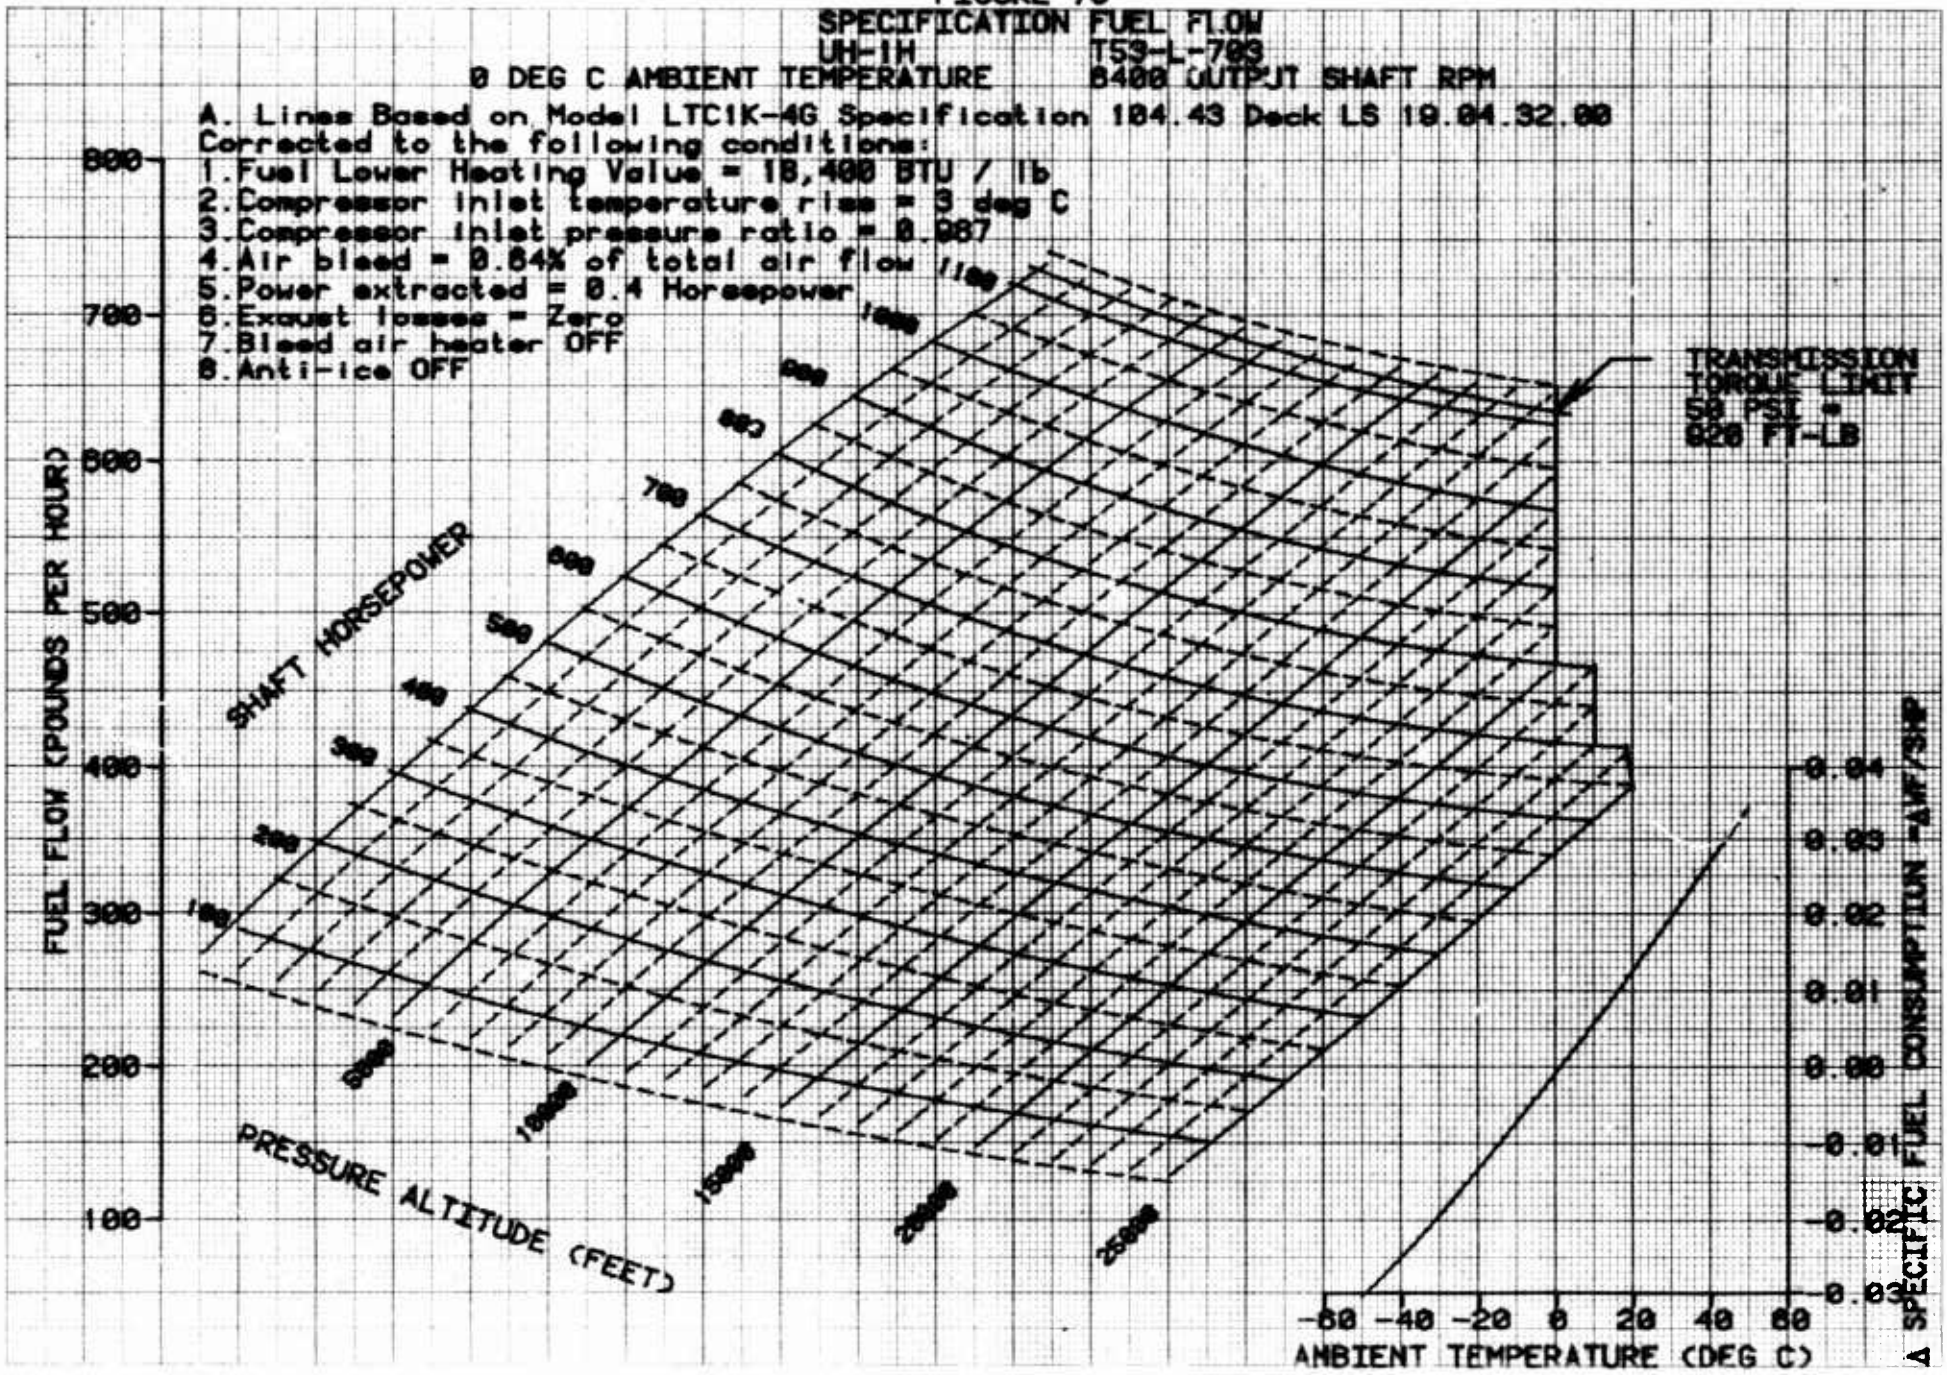
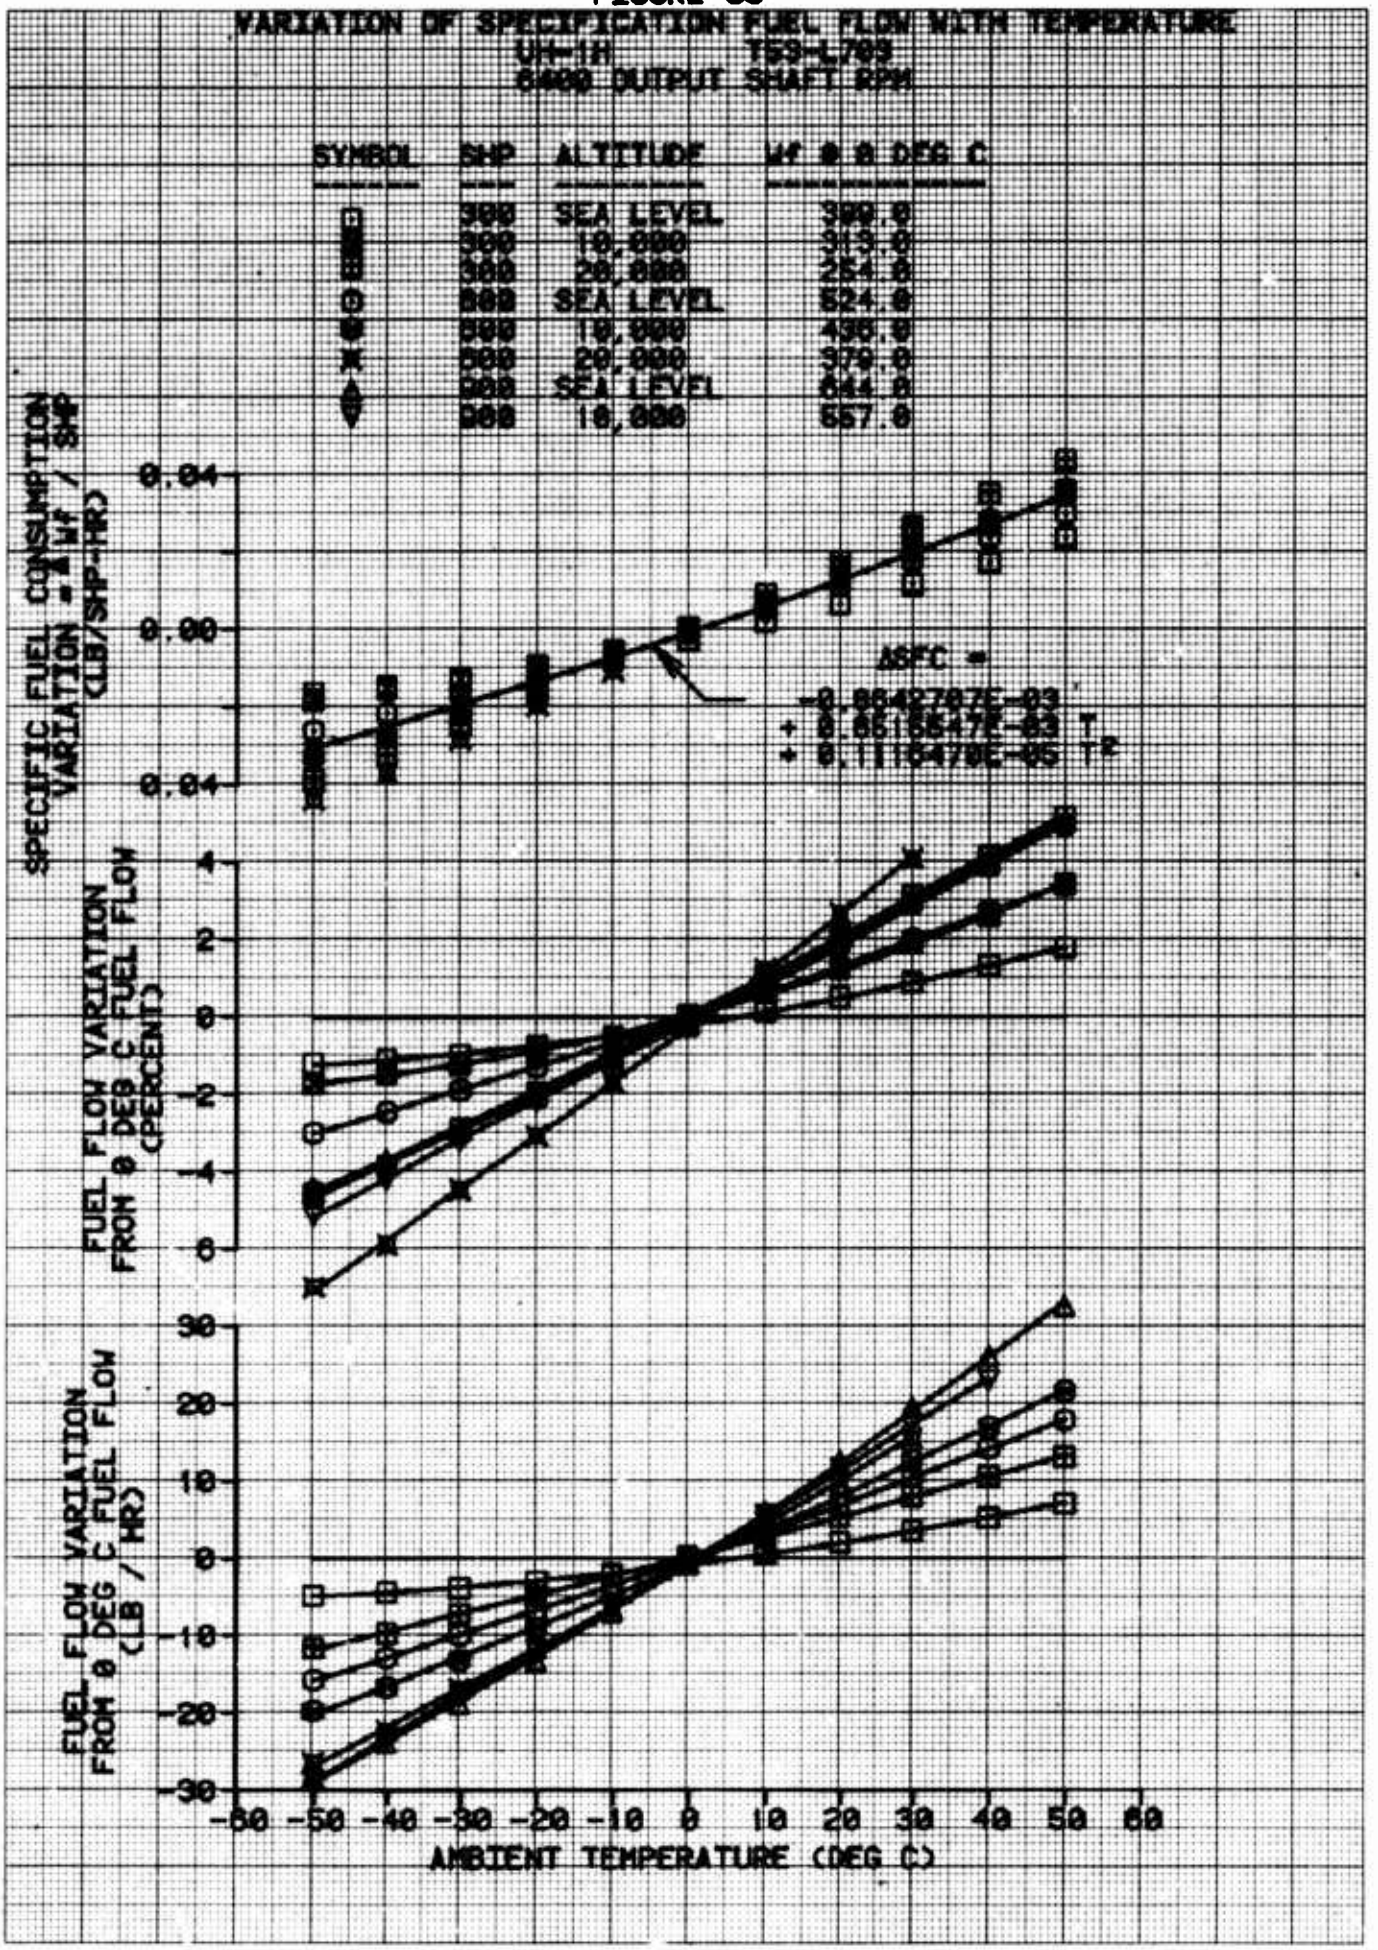

SPECIFICATION FUEL FLOW
UH-1H T53-L-703
0 DEG C AMBIENT TEMPERATURE 6400 OUTPUT SHAFT RPM
A. Lines Based on Model LTC1K-4G Specification 104.43 Deck LS 19.04.32.00
Corrected to the following conditions:
1. Fuel Lower Heating Value = 18,400 BTU / lb
2. Compressor inlet temperature rise = 3 deg C
3. Compressor inlet pressure ratio = 0.987
4. Air bleed = 0.84% of total air flow
5. Power extracted = 0.4 Horsepower
6. Exaust losses = Zero
7. Bleed air heater OFF
8. Anti-ice OFF
TRANSMISSION TORQUE LIMIT 58 PSI = 820 FT-LB
FUEL FLOW (POUNDS PER HOUR)
SHAFT HORSEPOWER
PRESSURE ALTITUDE (FEET)
AMBIENT TEMPERATURE (DEG C)
Δ SPECIFIC FUEL CONSUMPTION - ΔWF/SHP

FIGURE 80


VARIATION OF SPECIFICATION FUEL FLOW WITH TEMPERATURE
VH-1H T53-L703
6600 OUTPUT SHAFT RPM
SYMBOL SHP ALTITUDE Wf @ 0 DEG C
900 SEA LEVEL 399.0
900 10,000 313.0
900 20,000 254.0
800 SEA LEVEL 524.0
800 10,000 436.0
800 20,000 379.0
700 SEA LEVEL 644.0
700 10,000 557.0
SPECIFIC FUEL CONSUMPTION VARIATION = Δ Wf / SHP (LB/SHP-HR)
0.04
0.00
-0.04
ΔSFC =
-0.8842787E-03
+ 0.8618647E-03 T
+ 0.1110478E-05 T2
FUEL FLOW VARIATION FROM 0 DEG C FUEL FLOW (PERCENT)
4
2
0
-2
-4
-6
FUEL FLOW VARIATION FROM 0 DEG C FUEL FLOW (LB / HR)
30
20
10
0
-10
-20
-30
-60 -50 -40 -30 -20 -10 0 10 20 30 40 50 60
AMBIENT TEMPERATURE (DEG C)

DISTRIBUTION

HQDA (DALO-AV, DALO-FDQ, DAMO-HRS, DAMA-PPM-T, DAMA-RA, DAMA-WSA)	6
US Army Materiel Command (AMCDE-SA, AMCDE-P, AMCQA-SA, AMCQA-ST)	4
US Army Training and Doctrine Command (ATCD-T, ATCD-B)	2
US Army Aviation Systems Command (AMSAV-8, AMSAV-ED, AMSAV-Q, AMSAV-MC, AMSAV-ME, AMSAV-L, AMSAV-N, AMSAV-GTD)	15
US Army Test and Evaluation Command (AMSTE-TE-V, AMSTE-TE-O)	2
US Army Logistics Evaluation Agency (DALO-LEI)	1
US Army Materiel Systems Analysis Agency (AMXSY-RV, AMXSY-MP)	8
US Army Operational Test and Evaluation Agency (CSTE-AVSD-E)	2
US Army Armor School (ATSB-CD-TE)	1
US Army Aviation Center (ATZQ-D-T, ATZQ-CDC-C, ATZQ-TSM-A, ATZQ-TSM-S, ATZQ-TSM-LH)	5
US Army Combined Arms Center (ATZL-TIE)	1
US Army Safety Center (PESC-SPA, PESC-SE)	2
US Army Cost and Economic Analysis Center (CACC-AM)	1
US Army Aviation Research and Technology Activity (AVSCOM) NASA/Ames Research Center (SAVRT-R, SAVRT-M (Library)	3
US Army Aviation Research and Technology Activity (AVSCOM) Aviation Applied Technology Directorate (SAVRT-TY-DRD SAVRT-TY-TSC (Tech Library)	2

US Army Aviation Research and Technology Activity (AVSCOM) Aeroflightdynamics Directorate (SAVRT-AF-D)	1
US Army Aviation Research and Technology Activity (AVSCOM) Propulsion Directorate (SAVRT-PN-D)	1
Defense Technical Information Center (FDAC)	2
US Military Academy, Department of Mechanics (Aero Group Director)	1
ASD/AFXT, ASD/ENF	2
US Army Aviation Development Test Activity (STEBG-CT)	2
Assistant Technical Director for Projects, Code: CT-24 (Mr. Joseph Dunn)	2
6520 Test Group (ENML)	1
Commander, Naval Air Systems Command (AIR 5115B, AIR 5301)	3
Defense Intelligence Agency (DIA-DT-2D)	1